



JL3T400V120RE3E7SN

LE3 Pack Module with NCE Gen.7 Trench/Fieldstop IGBT and Emitter Controlled diode and NTC


Features

- Neutral Point Clamped Three-Level Inverter Module
- Low Inductive Layout
- Solderable Pins



Benefits


- Higher System Efficiency
- Reduced Cooling Requirements
- Low Conduction Losses Over Temperature

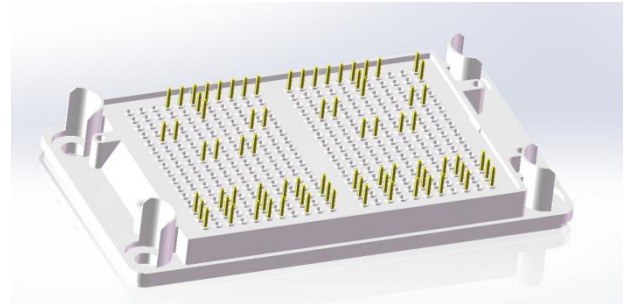

LE3 Pack

Typical Applications

- Solar Inverters
- 3-level-applications Converters
- UPS Systems

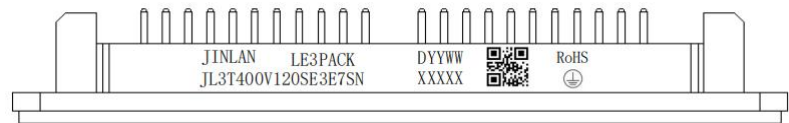

JINLAN

JL3T400V120SE3E7SN

YYWW

XXXXX

QR code

= Company Name


= Specific Device Code

= Year and Work Week Code

= Serial Number

= Custom Assembly Information

Description

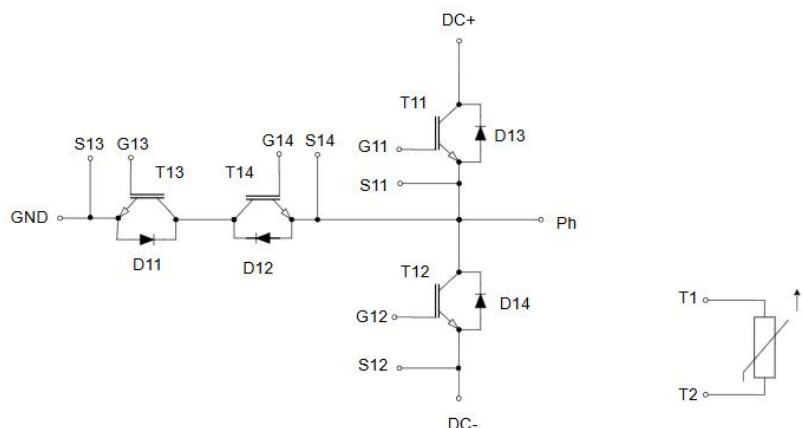



Package Insulation coordination

Parameter	Symbol	Note or test condition	Values	Unit
Isolation test voltage	V _{ISOL}	RMS,f=50Hz,t=60s	2.5	kV
Creepage distance	d _{creep}	terminal to heatsink	>12	mm
Clearance	d _{clear}	terminal to heatsink	>11	mm
Comparative tracking index (electrical)	CTI		>500	

Package Characteristic values

Parameter	Symbol	Note or test condition		Values			Unit
				Min.	Typ.	Max.	
Stray Inductance	L _{CE}			-	15	-	nH
Mounting torque for module mounting	M	-Mounting according to valid application note	M5, Screw	3		5	Nm
Storage Temperature Range	T _{STG}			-40		125	°C
Flatness of base plate						0.3	mm



IGBT(T11,T12)

Absolute Maximum Ratings (T_c = 25°C unless otherwise noted)

Symbol	Description	Value	Unit
V _{CES}	Collector-Emitter Voltage	1200	V
V _{GES}	Gate-Emitter Voltage	±20	V
I _C	Continuous Collector Current @ T _J = 150°C	400	A
I _{CP}	Pulsed Collector Current @ T _J = 150°C	800	A

Characteristics (T_c = 25°C unless otherwise noted)

Symbol	Parameter	Test Condition		Min	Typ	Max	Unit
V _{CE(sat)}	Collector–Emitter Saturation Voltage	V _{GE} = 15 V, I _C =400 A	T _J = 25°C	--	1.60	2.2	V
			T _J = 150°C	--	1.80	--	
V _{GE(TH)}	Gate–Emitter Threshold Voltage	V _{GE} = V _{CE} , I _C =8 mA		4.5	5.25	6.0	V
I _{CES}	Collector–Emitter Cutoff Current	V _{GE} = 0 V, V _{CE} = 1200 V		--	--	800	μA
I _{GES}	Gate Leakage Current	V _{GE} = ± 30 V, V _{CE} = 0 V		--	--	± 200	nA
Q _g	Total Gate Charge	V _{CE} = 600 V, V _{GE} = ± 15 V		--	1.34	--	μC
C _{iss}	Input Capacitance	V _{CE} = 30 V, V _{GE} = 0 V, f = 100 kHz		--	37.72	--	nF
C _{rss}	Reverse Transfer Capacitance			--	0.22	--	nF
t _{d(on)}	Turn–On Delay Time (inductive load)	T _J = 25°C V _{CE} =600V, I _C =400A V _{GE} = -7 V to +15 V, R _{Gon} = 25Ω, R _{Goff} =25Ω		--	476	--	ns
t _r	Rise Time (inductive load)			--	268	--	
t _{d(off)}	Turn–off Delay Time (inductive load)			--	1227	--	
t _f	Fall Time (inductive load)			--	308	--	
E _{on}	Turn–On Switching Loss per Pulse	T _J = 150°C V _{CE} =600V, I _C =400A V _{GE} = -7 V to +15 V, R _{Gon} = 25Ω, R _{Goff} =25Ω		--	27.37	--	mJ
E _{off}	Turn Off Switching Loss per Pulse			--	10.95	--	
t _{d(on)}	Turn–On Delay Time			--	TBD	--	ns
t _r	Rise Time			--	TBD	--	
t _{d(off)}	Turn–off Delay Time			--	TBD	--	
t _f	Fall Time			--	TBD	--	
E _{on}	Turn–on Switching Loss per Pulse			--	TBD	--	mJ
E _{off}	Turn Off Switching Loss per Pulse			--	TBD	--	
R _{thJC}	Thermal Resistance – Chip–to–Case	Junction-to-Case (per diode)		--	0.088	--	°C/W
T _{vj op}	Temperature under switching conditions			-40	--	175 ¹⁾	°C

¹⁾T_{vj op} > 150°C is only allowed for operation at overload conditions.

**Diode (D13, D14)****Absolute Maximum Ratings** ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Description	Value	Unit
V_{RRM}	Peak Repetitive Reverse Voltage	1200	V
I_F	Continuous Forward Current @ $T_J = 150^\circ\text{C}$	400	A
I_{FRM}	Repetitive Peak Forward Current @ $T_J = 150^\circ\text{C}$	800	A

Characteristics ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Test Condition		Min	Typ	Max	Unit
V_F	Diode Forward Voltage	$I_F = 400\text{ A}$	$T_J = 25^\circ\text{C}$	--	1.50	2.3	V
			$T_J = 150^\circ\text{C}$	--	1.40	--	
T_{rr}	Reverse Recovery Time	$V_{CE}=600\text{V}, I_F=400\text{A},$ $V_{GE}=15/-5\text{V}$ $R_g=25\Omega$		--	349		ns
I_{RRM}	Peak Reverse Recovery Current			--	87.5	--	A
Q_{rr}	Reverse Recovery Charge			--	3.8	--	μC
E_{REC}	Reverse Recovery Energy			--	7.2	--	mJ
R_{thJC}	Thermal Resistance – Chip-to-Case	Junction-to-Case (per diode)		--	0.127	--	$^\circ\text{C/W}$
$T_{vj\text{ op}}$	Temperature under switching conditions			-40	--	$175^{2)}$	$^\circ\text{C}$

²⁾ $T_{vj\text{ op}} > 150^\circ\text{C}$ is only allowed for operation at overload conditions.

**IGBT (T13,T14)****Absolute Maximum Ratings** ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Description	Value	Unit
V_{CES}	Collector-Emitter Voltage	650	V
V_{GES}	Gate-Emitter Voltage	± 20	V
I_C	Continuous Collector Current @ $T_J = 150^\circ\text{C}$	400	A
I_{CP}	Pulsed Collector Current @ $T_J = 150^\circ\text{C}$	800	A

Characteristics ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Test Condition		Min	Typ	Max	Unit
V _{CE(sat)}	Collector–Emitter Saturation Voltage	V _{GE} = 15 V, I _C =400 A	T _J = 25°C	--	1.4	2.0	V
			T _J = 150°C	--	1.6	--	
V _{GE(TH)}	Gate–Emitter Threshold Voltage	V _{GE} = V _{CE} , I _C =4mA		4.0	4.75	5.5	V
I _{CES}	Collector–Emitter Cutoff Current	V _{GE} = 0 V, V _{CE} = 650 V		--	--	800	μA
I _{GES}	Gate Leakage Current	V _{GE} = ± 30 V, V _{CE} = 0 V		--	--	± 200	nA
Q _g	Total Gate Charge	V _{CE} = 600 V, V _{GE} = ± 15 V		--	0.985	--	μC
C _{iss}	Input Capacitance	V _{CE} = 30 V, V _{GE} = 0 V, f = 100 kHz		--	29.00	--	nF
C _{oss}	Output Capacitance			--	1.03	--	
C _{rss}	Reverse Transfer Capacitance			--	0.20	--	
t _{d(on)}	Turn-On Delay Time	V _{CE} =400V, I _C =400A V _{GE} = -7 V to +15 V, R _{Gon} = 25Ω, R _{Goff} =25Ω T _J = 25°C		--	615	--	ns
t _r	Rise Time			--	219	--	
t _{d(off)}	Turn-off Delay Time			--	1764	--	
t _f	Fall Time			--	289	--	
E _{on}	Turn-On Switching Loss per Pulse	V _{CE} =400V, I _C =400A V _{GE} = -7 V to +15 V, R _{Gon} = 25Ω, R _{Goff} =25Ω T _J = 150°C		--	43.16	--	mJ
E _{off}	Turn Off Switching Loss per Pulse			--	27.96	--	
t _{d(on)}	Turn-On Delay Time			--	TBD	--	ns
t _r	Rise Time			--	TBD	--	
t _{d(off)}	Turn-off Delay Time			--	TBD	--	
t _f	Fall Time			--	TBD	--	
E _{on}	Turn-on Switching Loss per Pulse			--	TBD	--	mJ
E _{off}	Turn Off Switching Loss per Pulse			--	TBD	--	
R _{thJC}	Thermal Resistance – Chip-to–Case	Junction-to-Case (per diode)		--	0.14	--	°C/W
T _{vj op}	Temperature under switching conditions			-40	--	175 ³⁾	°C

³⁾ $T_{vj\text{ op}} > 150^\circ\text{C}$ is only allowed for operation at overload conditions.



Diode (D11, D12)

Absolute Maximum Ratings (T_C = 25°C unless otherwise noted)

Symbol	Description	Value	Unit
V _{RRM}	Peak Repetitive Reverse Voltage	650	V
I _F	Continuous Forward Current @ T _C = 75°C (T _J = 150°C)	400	A
I _{FRM}	Repetitive Peak Forward Current@ T _J = 150°C	800	A

Characteristics (T_C=25°C unless otherwise noted)

Symbol	Parameter	Test Condition		Min	Typ	Max	Unit
V _F	Diode Forward Voltage	I _F = 400 A, V _{GE} = 0 V	T _J = 25°C	--	1.50	2.3	V
			T _J = 150°C	--	1.40	--	
T _{rr}	Reverse Recovery Time	V _{CE} =400 V, I _C =400A V _{GE} = -7 V to +15 V, R _{Gon} = 25Ω, R _{Goff} =25Ω,T _J = 25°C		--	336	--	ns
I _{RRM}	Peak Reverse Recovery Current			--	157	--	A
Q _{rr}	Reverse Recovery Charge			--	8.7	--	μC
E _{REC}	Reverse Recovery Energy			--	3.2	--	mJ
R _{thJC}	Thermal Resistance – Chip-to-Case	Junction-to-Case (per diode)		--	0.189	--	°C/W
T _{vj op}	Temperature under switching conditions			-40	--	175 ⁴⁾	°C

⁴⁾T_{vj op} > 150°C is only allowed for operation at overload conditions.

NTC Characteristics (T_C = 25°C unless otherwise noted)

Symbol	Parameter	Test Condition	Min	Typ	Max	Unit
R ₂₅	Rated Resistance	T _C = 25°C	--	5	--	kΩ
ΔR/R	Deviation of R100	T _C = 100 °C, R ₁₀₀ = 493Ω	-5	--	5	%
B _{25/50}	B-value	R ₂ = R ₂₅ exp[B _{25/50} (1/T ₂ - 1/(298.15K))]	--	3375	--	K
B _{25/100}	B-value	R ₂ = R ₂₅ exp[B _{25/100} (1/T ₂ - 1/(298.15K))]	--	3433	--	K

JL3T400V120RE3E7SN



REVISION HISTORY

Document version	Date of release	Description of changes
Rev.00	2025-3-19	Preview



ATTENTION

■ Any and all Jinlan power products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your Jinlan Power Semiconductor representative nearest you before using any Jinlan power products described or contained herein in such applications.

■ Jinlan Power Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all Jinlan power modules described or contained herein.

■ Specifications of any and all Jinlan power products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

■ Jinlan Power Semiconductor (Wuxi).co.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

■ In the event that any or all Jinlan power products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations,such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.

■ No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of Jinlan Power Semiconductor (Wuxi).co.,LTD.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. Jinlan Power Semiconductor believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

■ Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the Jinlan power product that you intend to use.

■ This catalog provides information as of Mar.2025. specifications and information herein are subject to change without notice.