

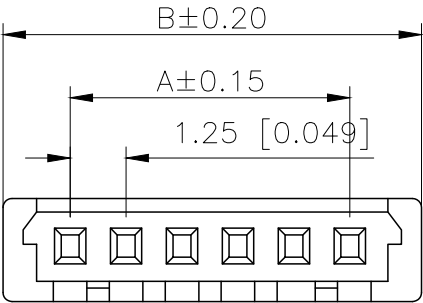



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.03	阿树



03P~30P



02P

■SPECIFICATIONS


- Voltage rating:150V AC/DC
- Current rating:1A AC/DC
- Withstanding Voltage:500V AC/minute
- Temperature range:−40°C~+125°C
- Insulation resistance:≥500MΩ
- Contact resistance:≤30mΩ

PART NO.:


X9862 H-XX-N0
① ② ③ ④

- ①Series No
②Category:H-HSG
③Row No.Pin No:XX-02~30Pin
④Material:N0-PA66 94V0

Poles	DIM		
	A	B	C
02	1.25	4.35	/
03	2.50	5.60	1.25
04	3.75	6.85	2.50
05	5.00	8.10	3.75
06	6.25	9.35	5.00
07	7.50	10.60	6.25
08	8.75	11.85	7.50
09	10.00	13.10	8.75
10	11.25	14.35	10.00
11	12.50	15.60	11.25
12	13.75	16.85	12.50
13	15.00	18.10	13.75
14	16.25	19.35	15.00
15	17.50	20.60	16.25
20	23.75	26.85	22.50
25	30.00	33.10	28.75
30	36.25	39.35	35.00

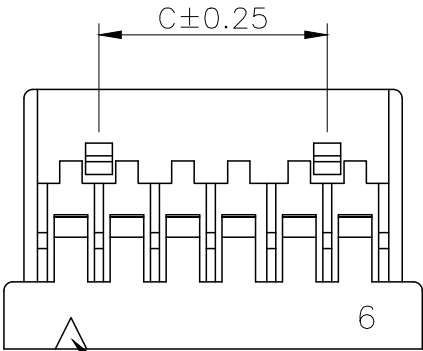

Circuit 1

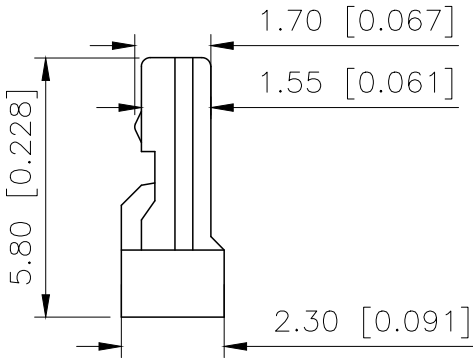

X9862H-XX-N0	Nylon 66	X9862W	X9862T
PART NO	Material	Suitable XKB Wafer	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuces	



DESIGN
CHECKED
APPROVED

阿树

VIEW:
UNIT: mm/in
SIZE: A4

MODEL TYPE:
1.25mm Crimp Style Connectors
PART NO.:
X9862H-XX-N0
DWG NO.:

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1