


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.13	阿树

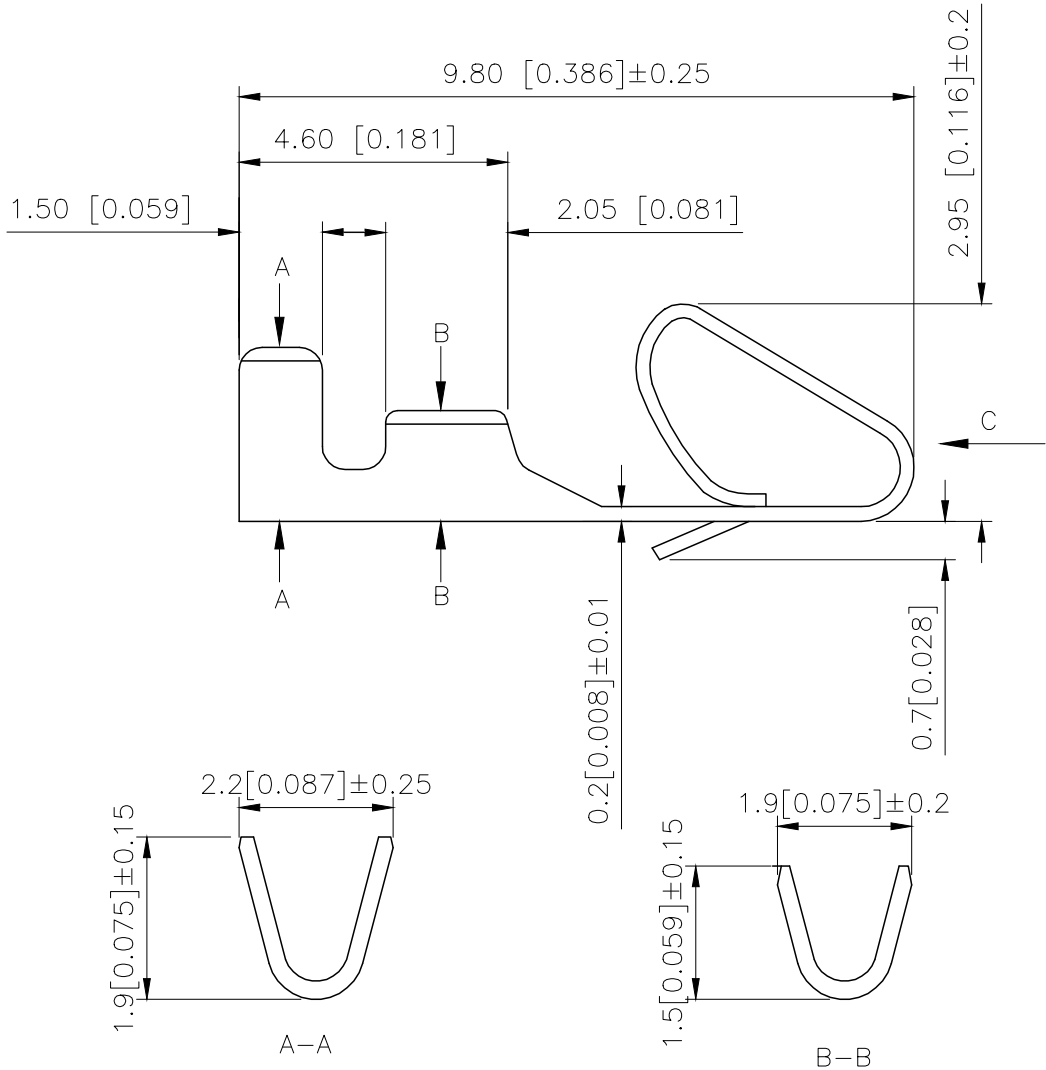

- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:3A AC/DC
 - Withstanding Voltage:1000V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤10mΩ
 - After environmental testing:≤20mΩ

PART NO.:

X2510 T-P SN
① ② ③ ④

- ①Series Number.
②Category: T-terminal
③Material: P-Phosphor bronze
④Planting style:SN-Bright tin plating

X2510T-PSN	Brass	AWG#22-28	1.57mm(Max)	Stamping Before Plating:30u" Ni;70u"Sn	X2510H
PART NO	Material	Wire Range	Insulation O.D.	Finish	Mates With XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 2.54mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X2510T-PSN
APPROVED		SIZE: A4	DWG NO.: