
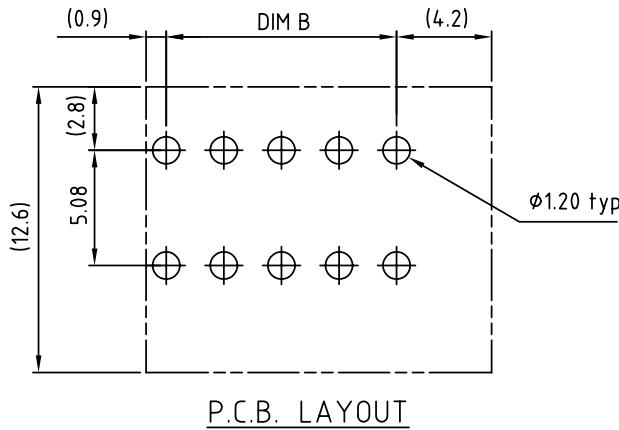
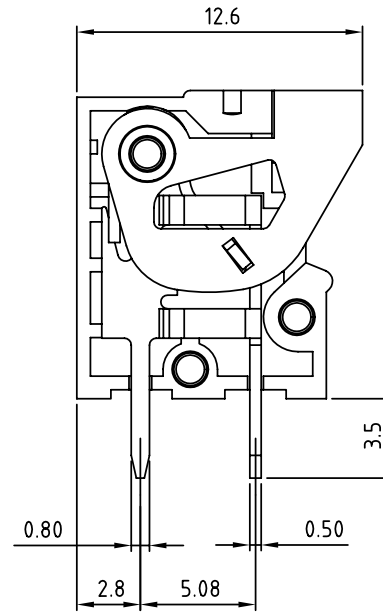
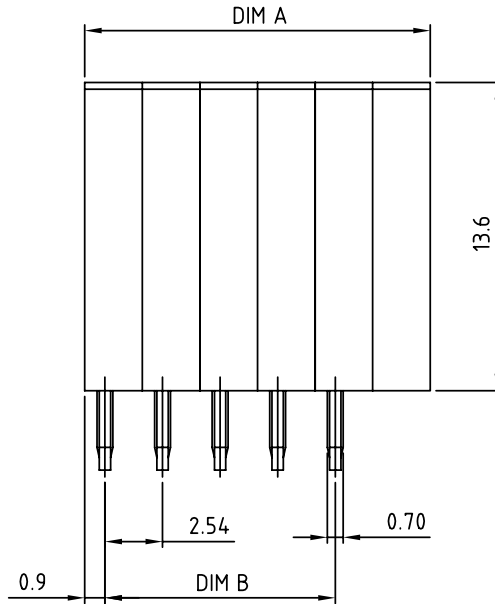


SIGN	DATE	DESCRIPTION	APPROVER
	01/20'07	The Soldering temperature from 245° to 250°	Aaron
	10/29'08	ADD Tolerance	Seamus
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

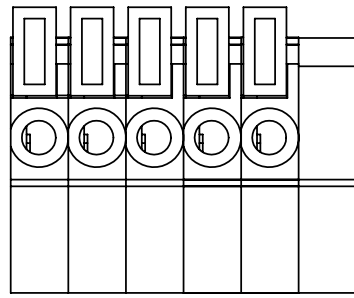

Dimension

DIM A	(N+1)×2.54
DIM B	(N-1)×2.54

N=Number of poles

POLES	DIM A	DIM B
2p-8p	±0.15	±0.15
9p-12p	±0.25	±0.25
13p-18p	±0.30	±0.30
19p-24p	±0.40	±0.40

Material

- Terminal body (Contact pin): Brass
- Wire guard: Stainless steel
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus

- Voltage rating: 150VAC
- Current rating: 2A
- Wire range:
- Solid wire(AWG): 20-26
- Stranded wire(AWG): 20-26
- Pull force:
- Screw:
- Wire strip length: 9-10mm
- Withstanding Voltage: 1.3KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:

HA xx 50 x 0 xxxx G

- 02 2 CONTACTS 2 Red 0000 Standard @ Logo
- 03 3 CONTACTS 3 Orange 000A Standard ANY Logo
- ... 5 Green(RAL6018/T) Any special item by
- 24 24 CONTACTS 8 Grey(RAL7004/P) customer request,
- please contact sales
- department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		HA-2.54mm 90° Series			
PART NO.		HAxx50x0xxxxG		DWG NO.	8HA0501
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
	Seamus 2008.10.29	Seamus 2008.10.29	Aaron 2007.01.20		X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°
SHEET: 01/01		REV: E			

E
D
C
B
A

1
2
3
4
5
6
7

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

<u>HA0250500000G</u>	<u>HA0350500000G</u>	<u>HA0450500000G</u>	<u>HA0550500000G</u>	<u>HA0650500000G</u>	<u>HA0750500000G</u>
<u>HA0850500000G</u>	<u>HA0950500000G</u>	<u>HA1050500000G</u>	<u>HA1150500000G</u>	<u>HA1250500000G</u>	<u>HA1350500000G</u>
<u>HA1450500000G</u>	<u>HA1550500000G</u>	<u>HA1650500000G</u>	<u>HA1750500000G</u>	<u>HA1850500000G</u>	<u>HA1950500000G</u>
<u>HA2050500000G</u>	<u>HA2150500000G</u>	<u>HA2250500000G</u>	<u>HA2350500000G</u>	<u>HA2450500000G</u>	<u>HA0250800000G</u>