



# Jauch Battery Solutions

- Reliable energy for your application
- Standard cells and customized packs
- ESD protection
- Battery Certification Experts



RoHS compliant



Pb free



REACH compliant




Conflict Mineral free

## Technical Data Sheet for CR2354

### SPECIFICATIONS

Nominal Voltage	▪ 3V
Nominal Capacity	▪ 530 mAh
Standard Load	▪ 7.5 kΩ
Standard Current	▪ 0.2 mA
Max. Continuous Current	▪ 1 mA
Max. Pulse Current	▪ 15 mA
Operating Temperature	▪ -20°C to +60°C*
Weight	▪ Approx. 5.9 gr.
Chemistry	▪ Li/ MnO <sub>2</sub>
UL1642	▪ MH62838


### DIMENSIONS




\*In applications where the battery is exposed to temperatures >60°C, please contact Jauch.

**Available Terminals and Wire Connectors:** please contact Jauch for diagram of batteries with terminals (batterytechnology@jauch.com).


### DISCHARGE CHARACTERISTICS

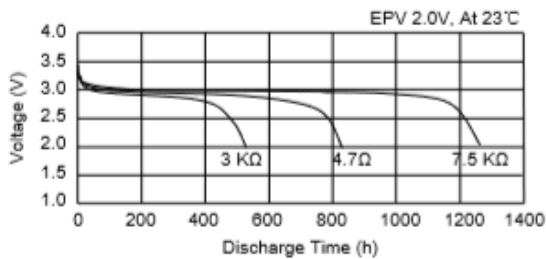

### TEMPERATURE CHARACTERISTICS

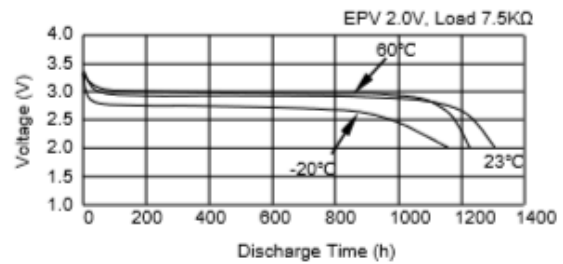

### PULSE DISCHARGE CHARACTERISTICS

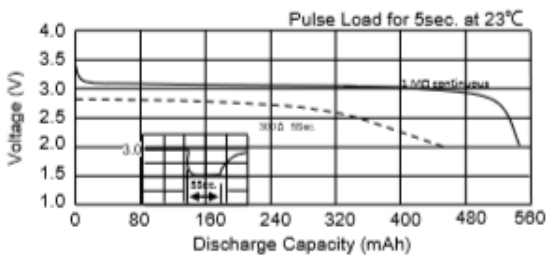

### LOAD VS: CAPACITY

