


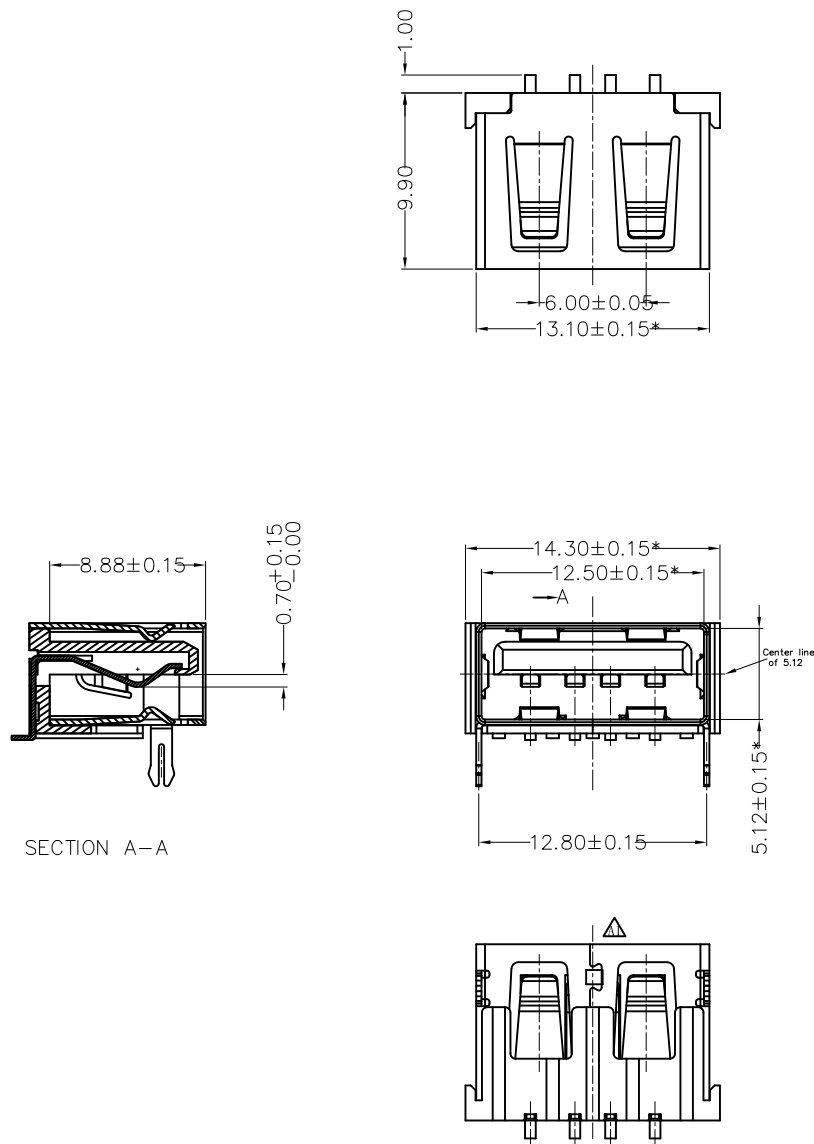

- NOTES:
- HOUSING: SEE NOTES.
 - TERMINAL: SEE NOTES.
 - SHELL: SEE NOTES.
- SPECIFICATION:
- ELECTRICAL CHARACTERISTIC:
 - CONTACT RESISTANCE: 30MΩ MAX
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
 - INSULATION RESISTANCE: 1000MΩ MIN
 - MECHANICAL CHARACTERISTIC:
 - INSERTION FORCE: 35N(3.57KGF) MAX
 - EXTRACTION FORCE: 10~35N(1.02~3.57KGF) MIN
 - DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N 3000 CYCLES MIN
 - 5000 CYCLES EXTRACTION FORCE:3~35N
 - ENVIRONMENTAL:
 - OPERATING TEMPERATURE: -55℃+85℃
 - Contact finish:
 - 01:Selective Gold Flash
 - 02:Selective Gold 3U"
 - 03:Selective Gold 5U"
 - 04:Selective Gold 15U"
 - 05:Selective Gold 30U"

产品图				深圳市精拓金电子有限公司					
PRODUCT CHART DWG									
公差一览表									
TOLERANCE UNLESS OTHERWISE				单位	MM	制图	Z-Y-B	制图料号	910-161A2022S10100
X.	±0.25	X.	±5.°	UNITS		CHKD		PRODUCT PART NO.	
.X	±0.20	.X	±2.°	比例	1:1	审核		产品名称	AF10.0C款前两脚无边铁壳
.XX	±0.15	.XX	±1.°	SCALE		核准		PRODUCT NO.	LCP黑胶6.5SMT
.XXX	±0.10	.XXX	±0.5°	日期	2012.06.15	核淮		角法	
				DATE		APPD		版本	A0
								VIEW	