



FEMALE PLUG M12 90° ANGLED

NOTES:
RATED VOLTAGE: 3, 4 contacts 250V
5 contacts 60V
8 contacts 30V
RATED CURRENT: 3, 4, 5 contacts 4A
8 contacts 2A
TEMPERATURE: SEE CABLE INFORMATION
INSULATION RESISTANCE: 10⁸ Ω MIN.
MATING CYCLES: MIN. 100
ENVIRONMENTAL:PROTECTION: IP67 IN MATED AND LOCKED POSITION

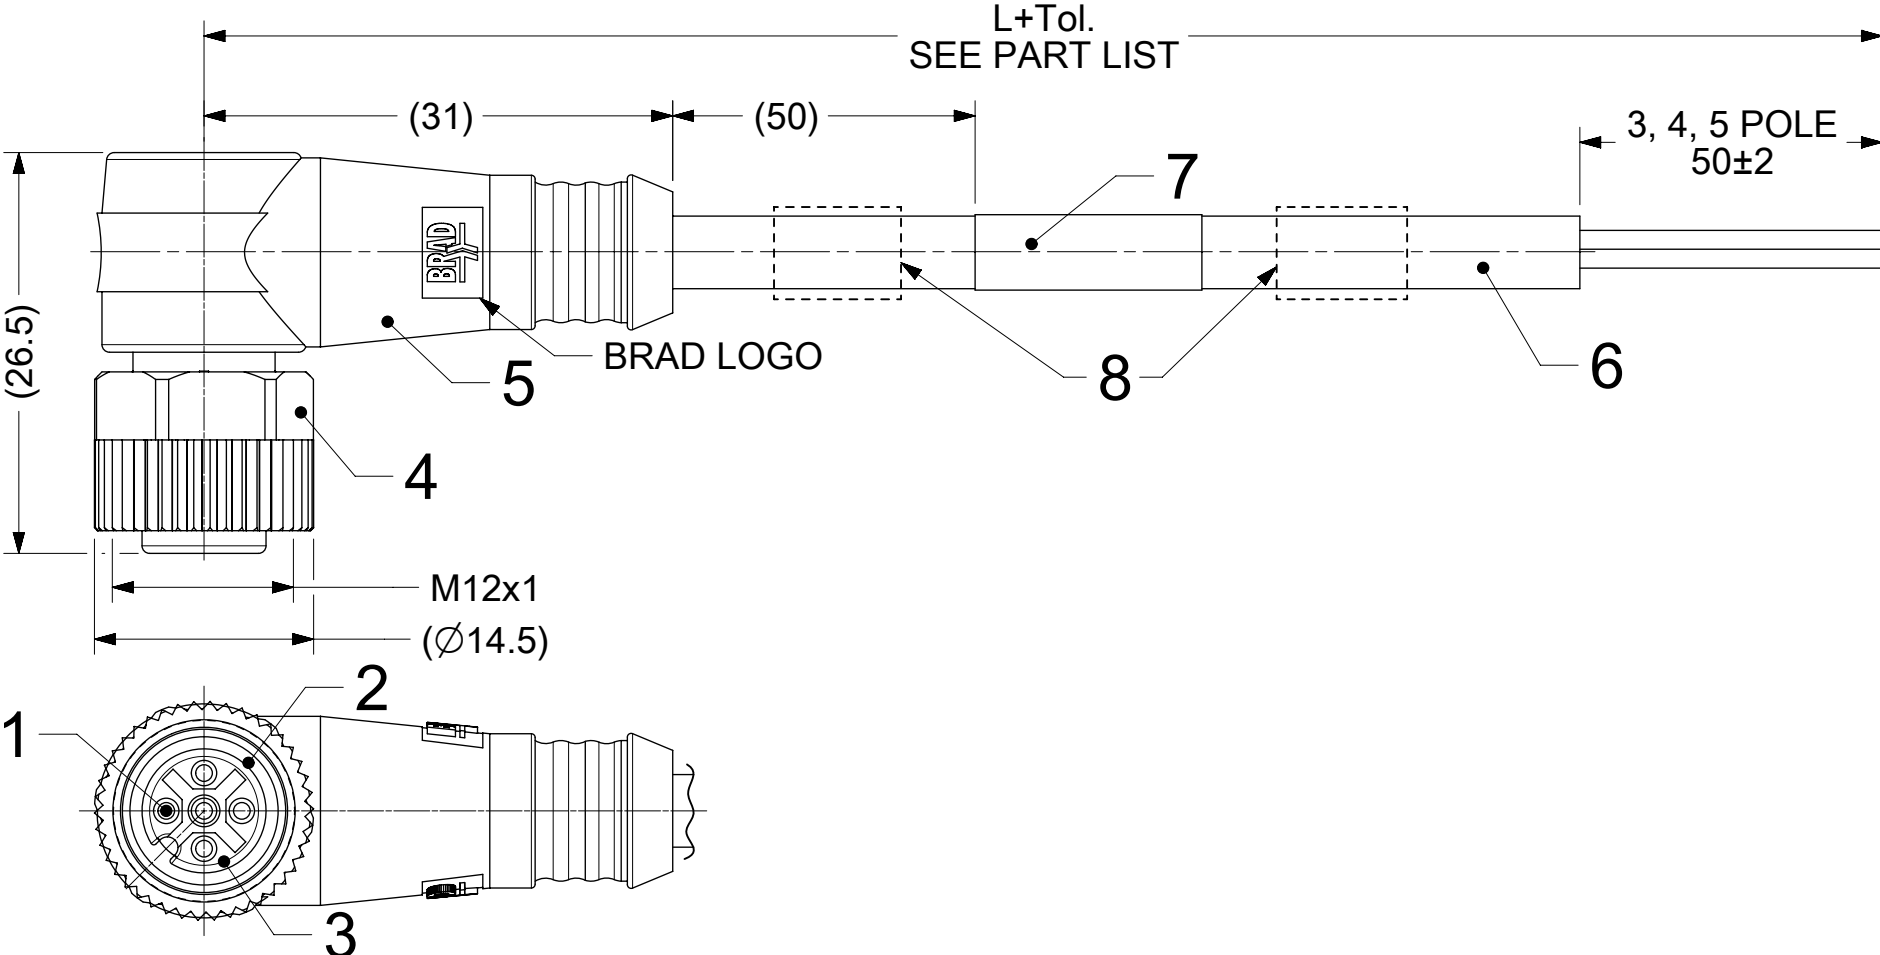

Thicker Overmold for Cables with bigger Outer Diameter (Ø>6)

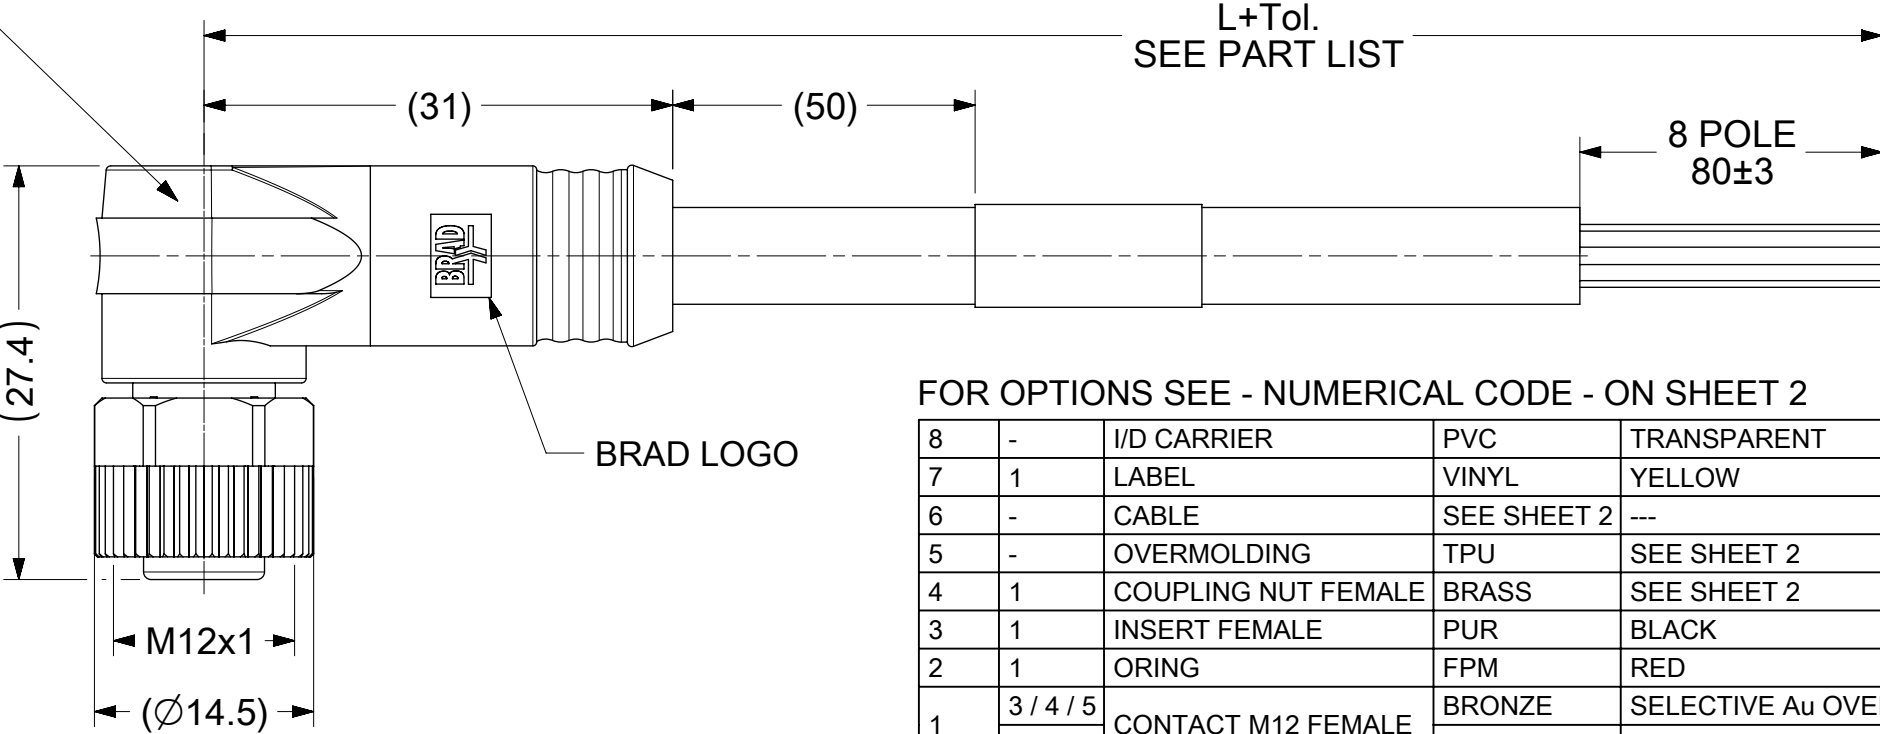

CONTACTS POSITION FRONT VIEW:


3 CONTACTS		4 CONTACTS		5 CONTACTS		8 CONTACTS	
PIN	WIRE	PIN	WIRE	PIN	WIRE	PIN	WIRE
1	BROWN	1	BROWN	1	BROWN	1	WHITE
2	---	2	WHITE	2	WHITE	2	BROWN
3	BLUE	3	BLUE	3	BLUE	3	GREEN
4	BLACK	4	BLACK	4	BLACK	4	YELLOW
5	---	5	---	5	GREY OR GREEN/YELLOW	5	GREY
						6	PINK
						7	BLUE
						8	RED

CODING REQUIRED TO IEC 61076-2-101

DOCUMENT STATUS	P1	RELEASE DATE	2024/07/02	09:17:37
-----------------	----	--------------	------------	----------


FOR OPTIONS SEE - NUMERICAL CODE - ON SHEET 2

8	-	I/D CARRIER	PVC	TRANSPARENT
7	1	LABEL	VINYL	YELLOW
6	-	CABLE	SEE SHEET 2	---
5	-	OVERMOLDING	TPU	SEE SHEET 2
4	1	COUPLING NUT FEMALE	BRASS	SEE SHEET 2
3	1	INSERT FEMALE	PUR	BLACK
2	1	ORING	FPM	RED
1	3 / 4 / 5	CONTACT M12 FEMALE	BRONZE	SELECTIVE Au OVER Ni
	8		BRASS	SELECTIVE Au OVER Ni
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH / COLOR


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
FUNCTIONAL SYMBOLS	DIMENSION UNITS		SCALE		CURRENT REV DESC: CHANGED DIMENSIONINGSTYLE OF OVERALL LENGTH TO END TO END. UPDATED NOTES AND SORTED PART LIST USING CABLE TYPES ON SHEET 3					molex			
	mm		2:1										
	GENERAL TOLERANCES (UNLESS SPECIFIED)												
	ANGULAR TOL ± 1.0 °												
DIVISIONAL SYMBOLS	E A = 0	4 PLACES		±	EC NO: 789428 DRWN: AKABADI 2023/02/27 CHK'D: RSILLER 2024/07/02 APPR: RSILLER 2024/07/02								
	E F = 0	3 PLACES		±									
	E F = 0	2 PLACES		± 0.05									
	1 PLACE		± 0.3										
	0 PLACES		± 0.5	INITIAL REVISION: DRWN: SSM 2021/12/13 APPR: RSILLER 2022/02/28									
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS												
THIRD ANGLE PROJECTION				DRAWING		SERIES		DOCUMENT NUMBER		DOC TYPE DOC PART REVISION			
				A3-SIZE		120065		1200656607		PSD	000	B	
								MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
								SEE SHEET 3		GENERAL MARKET		1 OF 3	

FEMALE PLUG M12 90° ANGLED

NOTES:
RATED VOLTAGE: 3, 4 contacts 250V
5 contacts 60V
8 contacts 30V
RATED CURRENT: 3, 4, 5 contacts 4A
8 contacts 2A
PROTECTION CLASS: IP 67
TEMPERATURE: -25°C / +80°C

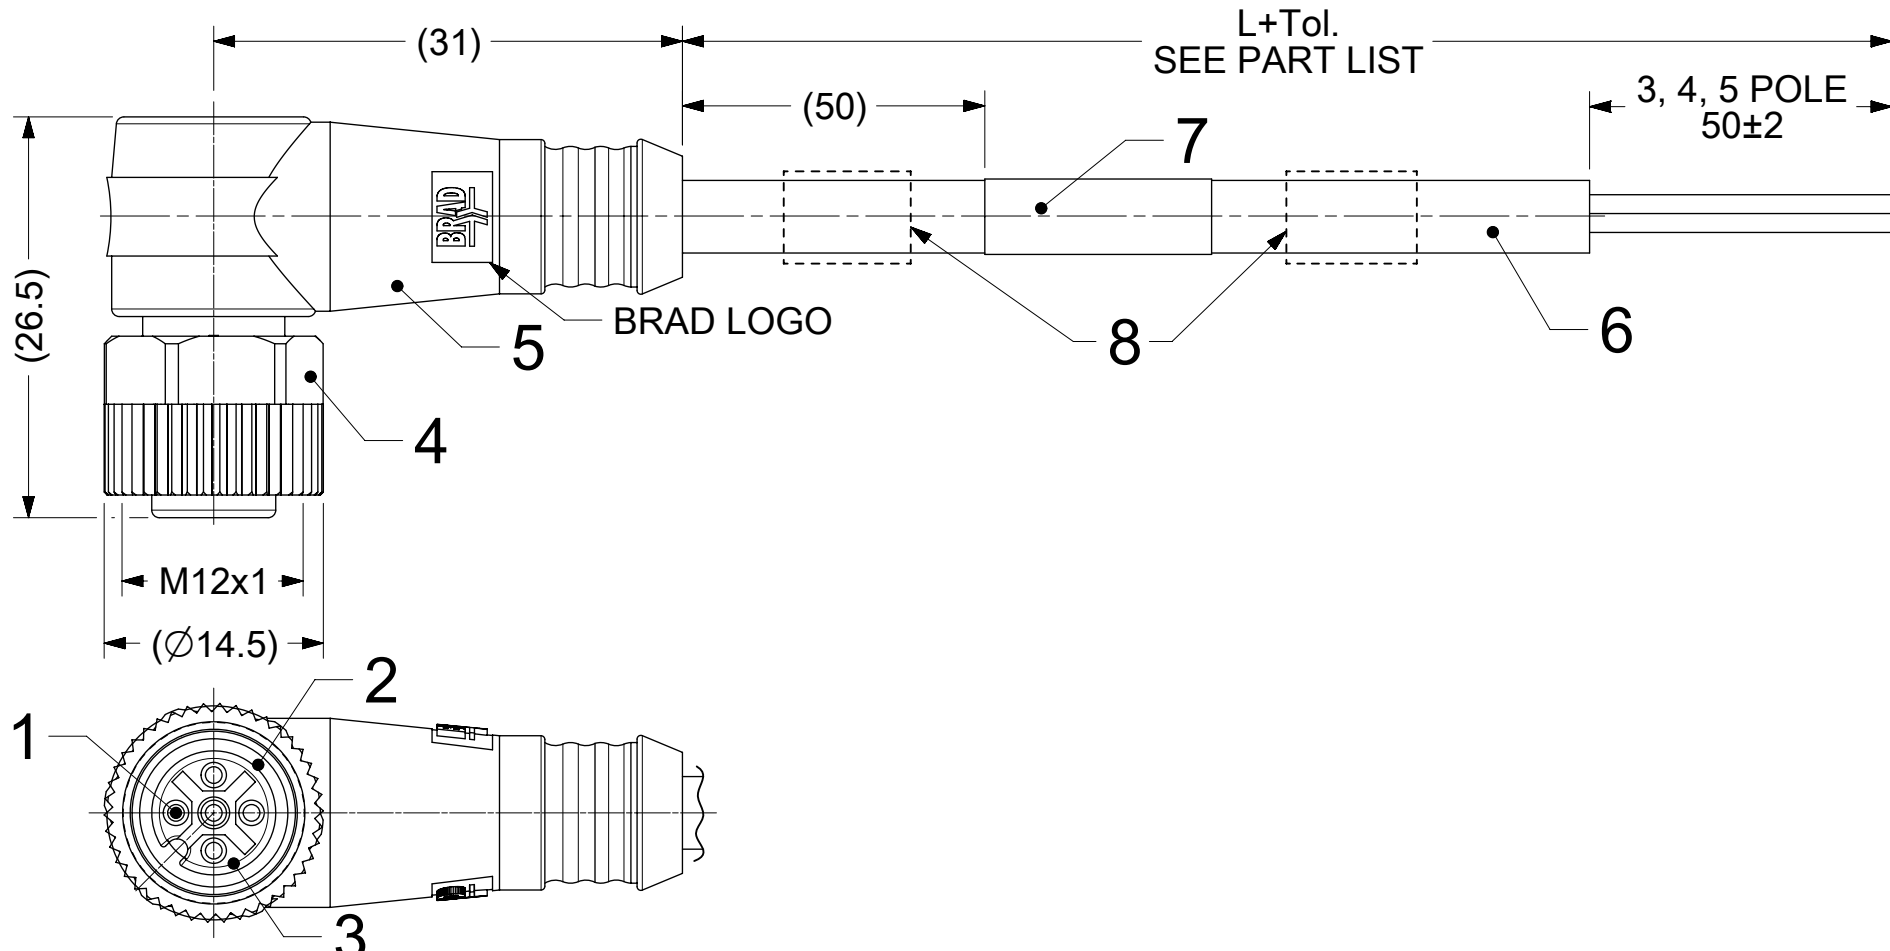

Thicker Overmold for Cables
with bigger Outer Diameter (Ø>6)

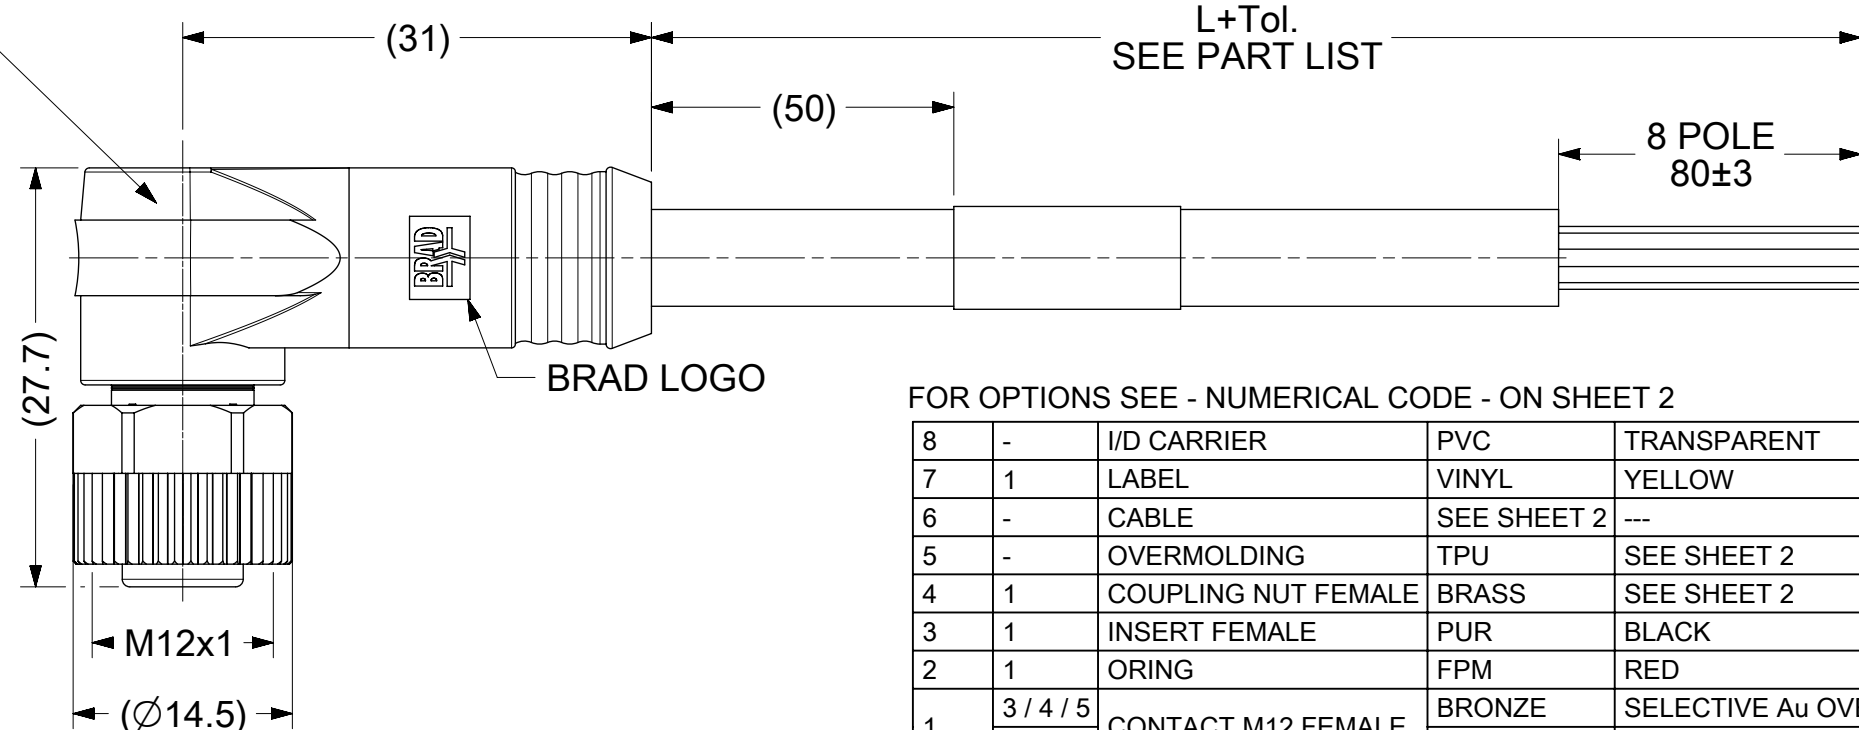

CONTACTS POSITION FRONT VIEW:

3 CONTACTS		4 CONTACTS		5 CONTACTS		8 CONTACTS	
PIN	WIRE	PIN	WIRE	PIN	WIRE	PIN	WIRE
1	BROWN	1	BROWN	1	BROWN	1	WHITE
2	---	2	WHITE	2	WHITE	2	BROWN
3	BLUE	3	BLUE	3	BLUE	3	GREEN
4	BLACK	4	BLACK	4	BLACK	4	YELLOW
5	---	5	---	5	GREY OR GREEN/YELLOW	5	GREY
						6	PINK
						7	BLUE
						8	RED

CODING REQUIRED TO IEC 61076-2-101

DOCUMENT STATUS	P1	RELEASE DATE	2021/06/22	13:20:30
-----------------	----	--------------	------------	----------

FOR OPTIONS SEE - NUMERICAL CODE - ON SHEET 2

8	-	I/D CARRIER	PVC	TRANSPARENT
7	1	LABEL	VINYL	YELLOW
6	-	CABLE	SEE SHEET 2	---
5	-	OVERMOLDING	TPU	SEE SHEET 2
4	1	COUPLING NUT FEMALE	BRASS	SEE SHEET 2
3	1	INSERT FEMALE	PUR	BLACK
2	1	ORING	FPM	RED
1	3 / 4 / 5	CONTACT M12 FEMALE	BRONZE	SELECTIVE Au OVER Ni
	8		BRASS	SELECTIVE Au OVER Ni
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH / COLOR

FUNCTIONAL SYMBOLS

$\sqrt{A}=0$

$\sqrt{E}=0$

$\sqrt{F}=0$

DIVISIONAL SYMBOLS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS

mm

SCALE

2:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL

± 1.0 °

4 PLACES

±

3 PLACES

±

2 PLACES

± 0.05

1 PLACE

± 0.3

0 PLACES

± 0.5

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: P/N'S ADDED

EC NO: 667684

DRWN: RSCHIEBER

CHK'D: RSILLER

APPR: RSILLER

2021/06/21

2021/06/22

2021/06/22

INITIAL REVISION:

DRWN: FSCHAFHAUSER

APPR: CBURGER

2014/02/10

2014/05/07

THIRD ANGLE PROJECTION

DRAWING

A3-SIZE

SERIES

120065

MATERIAL NUMBER

SEE SHEET 3

CUSTOMER

GENERAL MARKET

SHEET NUMBER

1 OF 3

molex

CSE M12 XP AC FE RA XM SE UNSH

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER

SD-120065-076

DOC TYPE

PSD

DOC PART

001

REVISION

A5

ENGINEERING NO. - NUMERICAL CODE (Available parts see PART LIST table. Others on request).

8

0

X

0

0

1

X

X

X

X

X

X

X

X

80=M12x1
Single ended

Contacts:
3=3 Contacts
4=4 Contacts
5=5 Contacts
8=8 Contacts

Heads style:
001=Plug Female
90° Angled

Cable type: See Table


Units:
M=Meter

Length
Examples:
005=0.5 unit
010=1 unit
100=10 units

OVERMOLD COLOR:
BLANK (STANDARD)= BLACK
Y= YELLOW, A= GREY,
G= BLACK, R= RED

COUPLING NUT:
BLANK (STANDARD)= KNURLED
/HEX BRASS, Ni PLATED
7 = KNURLED BRASS, Ni PLATED,
TEFLON COATED
5 = KNURLED DERLIN

H = 2 pcs. of I/D Carrier
PVC Transparent
(Cables B36 always with
2 pcs. I/D Carrier)

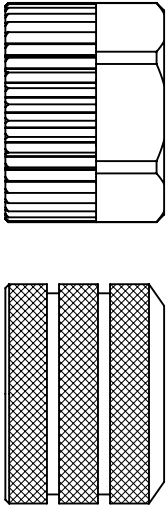

CABLE INFORMATION (for more information see Cable Data Sheet).

CABLE TYPE	NO. OF WIRES	CROSS SECTION	CABLE JACKET	UL	CSA	STATIC: TEMP. / BENDING RADIUS	DYNAMIC: TEMP. / BENDING RADIUS	DRAG CHAIN TESTED	OTHER	CABLE SPEC. DRAWING
B30	3 / 4 / 5	0.34mm²	TPU BLACK	STYLE 21215	YES	-40°C to +90°C, 5xO.D.	-25°C to +80°C, 7.5xO.D.	5 MIO CYCLES	WELD SLAG RESISTANCE	SD-120209-001
B42	5									SD-120209-001
B41	8	0.25mm²	TPU ORANGE							SD-120209-006
B36	4	0.34mm²								SD-120209-001
B33	4 / 5	0.34mm²								SD-120209-001
B55	4 / 5	0.34mm²								1552200001 PS

FUNCTIONAL SYMBOLS

FA

=

0

FE

=

0

FE

=

0

DIVISIONAL SYMBOLS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS

mm

SCALE

1:1

CURRENT REV DESC: P/N'S ADDED

EC NO: 667684

DRWN: RSCHIEBER

CHK'D: RSILLER

APPR: RSILLER

2021/06/21

2021/06/22

2021/06/22

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL ± 1.0 °

4 PLACES ±

3 PLACES ±

2 PLACES ± 0.05

1 PLACE ± 0.3

0 PLACES ± 0.5

INITIAL REVISION:

DRWN: FSCHAFHAUSER

APPR: CBURGER

2014/02/10

2014/05/07

DOCUMENT NUMBER

SD-120065-076

DOC TYPE

PSD

DOC PART

001

REVISION

A5

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

THIRD ANGLE PROJECTION

DRAWING

A3-SIZE

SERIES

120065

MATERIAL NUMBER

SEE SHEET 3

CUSTOMER

GENERAL MARKET

SHEET NUMBER

2 OF 3

moLEX

CSE M12 XP AC FE RA XM SE UNSH

PRODUCT CUSTOMER DRAWING

DOCUMENT STATUS

P1

RELEASE DATE

2021/06/22

13:20:30

10987654321

PART LIST


Lp.	MOLEX PN	ENGINEERING No	L+Tol. [mm]
1	1200652259	803001B30M010	1000 +40
2	1200652260	803001B30M020	2000 +60
3	1200652261	803001B30M050	5000 +60
4	1200652262	803001B30M100	10000 +80
5	1200652263	804001B30M010	1000 +40
6	1200652264	804001B30M020	2000 +60
7	1200652265	804001B30M050	5000 +60
8	1200652266	804001B30M100	10000 +80
9	1200659401	804001B30M150	15000 +160
10	1200659470	804001B30M030	3000 +60
11	1200659471	804001B30M200	20000 +160
12	1200659472	804001B30M250	25000 +160
13	1200659473	804001B30M300	30000 +300
14	1200659522	805001B30M010	1000 +40
15	1200659523	805001B30M020	2000 +60
16	1200659524	805001B30M050	5000 +60
17	1200659525	805001B30M100	10000 +80
18	1200659748	805001B30M150	15000 +160
19	1200659807	804001B30M083	8300 +80
20	1200652310	808001B41M010	1000 +40
21	1200652311	808001B41M020	2000 +60
22	1200652312	808001B41M050	5000 +60
23	1200652313	808001B41M100	10000 +80
24	1200656022	808001B41M150	15000 +160
25	1200659789	808001B41M083	8300 +80
26	1200652267	805001B42M010	1000 +40
27	1200652268	805001B42M020	2000 +60
28	1200652269	805001B42M050	5000 +60
29	1200652270	805001B42M100	10000 +80
30	1200659542	805001B42M200	20000 +160
31	1200656391	804001B36M0207H	2000 +60
32	1200656392	804001B36M0507H	5000 +60
33	1200656393	804001B36M1007H	10000 +80
34	1200656484	805001B30M200	20000 +160
35	1200656486	808001B41M200	20000 +160
36	*1200659432	804001B36M0207Y	2000 +60
37	*1200659433	804001B36M0507Y	5000 +60
38	*1200659434	804001B36M1007Y	10000 +80
39	1200656607	804001B33M010A	1000 +40
40	1200656608	804001B33M020A	2000 +60

NOTE:

* (STAR) - INDICATES THESE PNS ONLY HAVE ID CARRIER IN BOM.

DOCUMENT STATUS	P1	RELEASE DATE	2021/06/22	13:20:30
-----------------	----	--------------	------------	----------

[illegible]

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																					
$\frac{F}{A} = 0$ $\frac{F}{E} = 0$ $\frac{F}{D} = 0$ DIVISIONAL SYMBOLS		DIMENSION UNITS		SCALE		CURRENT REV DESC: P/N'S ADDED						molex											
		mm		1:1																			
		GENERAL TOLERANCES (UNLESS SPECIFIED)						EC NO: 667684 DRWN: RSCHIEBER2021/06/21 CHK'D: RSILLER2021/06/22 APPR: RSILLER2021/06/22						CSE M12 XP AC FE RA XM SE UNSH									
		ANGULAR TOL ± 1.0 °																					
		4 PLACES		±																			
3 PLACES		±				INITIAL REVISION: DRWN: FSCHAFFHAUSER2014/02/10 APPR: CBURGER2014/05/07						DOCUMENT NUMBER				DOC TYPE		DOC PART		REVISION			
2 PLACES		± 0.05										SD-120065-076				PSD		001		A5			
1 PLACE		± 0.3																					
0 PLACES		± 0.5																					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION				DRAWING		SERIES		MATERIAL NUMBER				CUSTOMER				SHEET NUMBER					
						A3-SIZE		120065		SEE SHEET 3				GENERAL MARKET				3 OF 3					