

SACCBP-FS-12CON-M16/10,0-PVCSCO - Device connector rear mounting



1423002

<https://www.phoenixcontact.com/us/products/1423002>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, Universal, 12-position, PVC/PVC, black RAL 9005, shielded, Socket, straight, M12-SPEEDCON, coding: A, on free cable end, Rear mounting, M16 x 1.5, Individual wires, cable length: 10 m, 0.14 mm², PVC black, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239400

Your advantages

- Preassembled with cables in various standard lengths for immediate use
- Customer-specific assemblies and cable lengths can be supplied
- Sealed on the cable side for optimum tightness of seal
- For high transmission safety: shield connection to the housing with optional EMC nut

Commercial data

Item number	1423002
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB25
Product key	ABQDGG
GTIN	4055626323626
Weight per piece (including packing)	706 g
Weight per piece (excluding packing)	706 g
Customs tariff number	85444290
Country of origin	DE

SACCBP-FS-12CON-M16/10,0-PVCSCO - Device connector rear mounting



1423002

<https://www.phoenixcontact.com/us/products/1423002>

Technical data

Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
Order information:	Lock nut is included in the scope of delivery

Mounting

Mounting type	Rear mounting M16 x 1.5 Thread with flat nut
Assembly note	Thread with flat nut

Product properties

Product type	Circular connectors (device side)
Sensor type	Universal
Number of positions	12
No. of cable outlets	1
Shielded	yes
Coding	A
Thread type	M12

Data management status

Article revision	06
------------------	----

Insulation characteristics

Overvoltage category	II
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	V0
Seal material	FKM
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 6.6
Material for screw connection	Zinc die-cast, nickel-plated
Outer sheath, material	PVC
Conductor material	Tin-plated Cu litz wires

Electrical properties

Rated surge voltage	0.8 kV
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ

SACCBP-FS-12CON-M16/10,0-PVCSCO - Device connector rear mounting



1423002

<https://www.phoenixcontact.com/us/products/1423002>

Nominal voltage U_N	30 V
Nominal current I_N	1.5 A
Max. conductor resistance	142 Ω /km

Connection data

Conductor connection

Connection method	Individual wires
Contact connection type	Socket
Conductor cross section	0.14 mm ²
Tightening torque	3 Nm ... 4 Nm (Installation-side)

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 100
Max. bending cycles	2000000

Connector

Connection 1

Head design	Socket
Head cable outlet	straight
Head thread type	M12
Head locking type	SPEEDCON
Coding	A

Connection 2

Head design	free cable end
-------------	----------------

Cable/line

Cable length	10 m
Cable type	PVC black
Short symbol	PVC
Signal type/category	Universal
External cable diameter	8.50 mm
Outer sheath, material	PVC
External sheath, color	black RAL 9005
Wire diameter incl. insulation	1.1 mm \pm 0.05 mm
Single wire, color	white-brown, green-yellow, gray-pink, blue-red, black-violet, gray/pink-red/blue
Cable cross section	0.14 mm ²
Material, inner sheath	PVC
Conductor material	Tin-plated Cu litz wires
Conductor structure signal line	7x 0.16 mm

SACCBP-FS-12CON-M16/10,0-PVCSCO - Device connector rear mounting



1423002

<https://www.phoenixcontact.com/us/products/1423002>

AWG signal line	26
Material wire insulation	PVC
Thickness, insulation	0.21 mm
Overall twist	Six pairs around the filler to the core
Shielding	Tinned copper braided shield
Optical shield covering	85 %
Nominal voltage, cable	300 V
Test voltage, cable	2000 V AC
Cable resistance	142 Ω /km
Number of bending cycles	2000000
Bending radius	85 mm
Traversing path	10 m
Traversing rate	3 m/s
Acceleration	10 m/s ²
Resistance to oil	DIN VDE 0472 Part 803, test type B
Flame resistance	DIN VDE 0472 part 804, test type B
Other resistance	Hydrolysis and microbe resistant as per VDE 0282 section 10
Ambient temperature (operation)	-40 °C ... 85 °C (cable, fixed installation)
	-25 °C ... 85 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67 (When plugged in)
	IP65 (When plugged in)
	IP65/IP67
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)
	-40 °C ... 85 °C (without mechanical actuation)
	-25 °C ... 85 °C (Cable, flexible installation)
	-40 °C ... 85 °C (cable, fixed installation)
Resistance to oil	DIN VDE 0472 Part 803, test type B

Standards and regulations

Flame resistance	DIN VDE 0472 part 804, test type B
Resistance to oil	DIN VDE 0472 Part 803, test type B
Other resistance	Hydrolysis and microbe resistant as per VDE 0282 section 10
Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101


SACCBP-FS-12CON-M16/10,0-PVCSCO - Device
connector rear mounting



1423002
<https://www.phoenixcontact.com/us/products/1423002>

Drawings

Schematic diagram

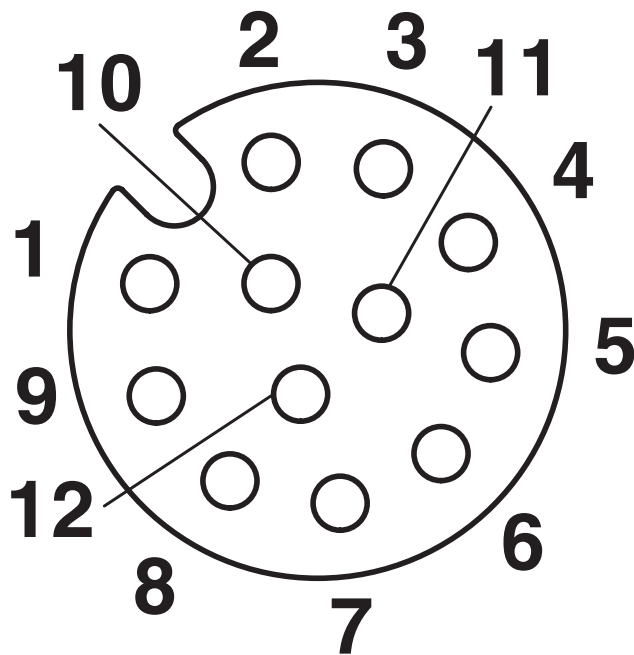

Pin assignment M12 socket, 12-pos., A-coded, view female side

Circuit diagram



SACCBP-FS-12CON-M16/10,0-PVCSCO - Device connector rear mounting



1423002
<https://www.phoenixcontact.com/us/products/1423002>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1423002>

	cUL Recognized Approval ID: E221474-20220907			
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
	30 V	1.5 A	-	-

	UL Recognized Approval ID: E221474-20220907			
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
	30 V	1.5 A	-	-

cULus Recognized				
-------------------------	--	--	--	--

SACCBP-FS-12CON-M16/10,0-PVCSCO - Device connector rear mounting



1423002
<https://www.phoenixcontact.com/us/products/1423002>

Classifications

ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

ETIM

ETIM 9.0	EC002635
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

SACCBP-FS-12CON-M16/10,0-PVCSCO - Device connector rear mounting



1423002
<https://www.phoenixcontact.com/us/products/1423002>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	fcb17c88-eba0-43b4-95c4-382e87c73540

SACCBP-FS-12CON-M16/10,0-PVCSCO - Device connector rear mounting



1423002

<https://www.phoenixcontact.com/us/products/1423002>

Accessories

SACC-M16-SEALING PLUG SET - Screw plug

1453368

<https://www.phoenixcontact.com/us/products/1453368>



Screw plug, Rear mounting, M16 x 1.5, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239800

PROT-M12 - Screw plug

1680539

<https://www.phoenixcontact.com/us/products/1680539>



An M12 screw plug for the unoccupied M12 sockets of the sensor/actuator cable, boxes and flush-type connectors

SACCBP-FS-12CON-M16/10,0-PVCSCO - Device connector rear mounting



1423002

<https://www.phoenixcontact.com/us/products/1423002>

PROT-M12 SH - Screw plug

1503302

<https://www.phoenixcontact.com/us/products/1503302>



An M12 screw plug for the unoccupied M12 sockets of the shielded sensor/actuator cable, boxes and flush-type connectors

PROT-M12 FB - Screw plug

1555538

<https://www.phoenixcontact.com/us/products/1555538>



M12 high-grade steel screw plug, for unoccupied M12 sockets of the sensor/actuator cables, boxes and flush-type connectors for the food industry

SACCBP-FS-12CON-M16/10,0-PVCSCO - Device connector rear mounting



1423002

<https://www.phoenixcontact.com/us/products/1423002>

SACC-M16-SEAL CLM - Flat gasket

1430394

<https://www.phoenixcontact.com/us/products/1430394>

M16 flat gasket for M12 flush-type connectors with M16 fastening thread



Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com