


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.03	阿树

- SPECIFICATIONS
- Voltage rating: 250V AC/DC
  - Current rating: 3A AC/DC
  - Withstanding Voltage: 1000V AC/minute
  - Temperature range: -40°C ~ +125°C
  - Insulation resistance: ≥ 1000MΩ
  - Contact resistance: ≤ 20mΩ

PART NO.:

X9862 I-P SN-A  
① ② ③ ④ ⑤

- ① Series No
- ② Category: T-Terminal
- ③ Material: P-Phosphor bronze
- ④ Plating style: SN-Bright tin plating
- ⑤ Special NO: A-Type A

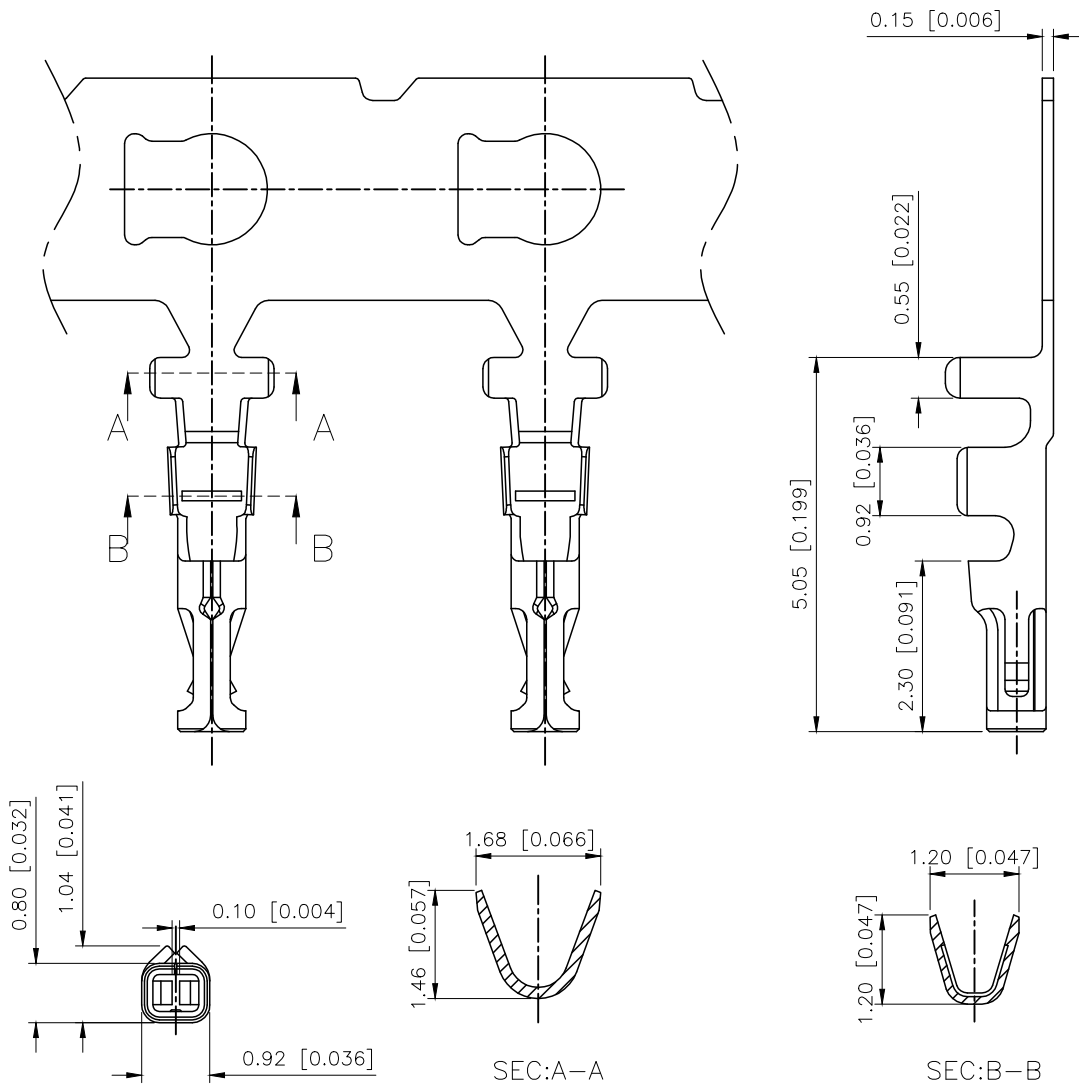

X9862T-PSN-A	Phosphor Bronze	Tin Plated	AWG#28-32	0.9mm	X9862H-A
PART NO	Material	Plating	Wire Range	Insulation O.D	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	1.25mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X9862T-PSN-A
APPROVED		SIZE:	A4	DWG NO.:	