





REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		图面升级整理图面	2024.08.31	阿树

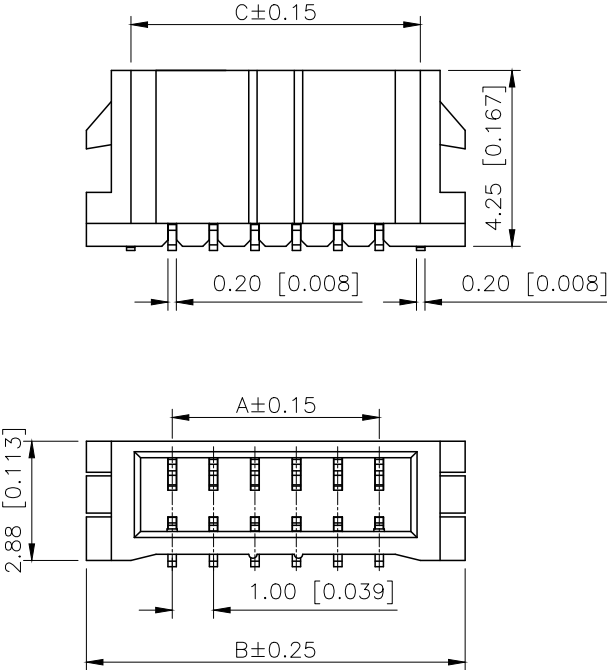

■SPECIFICATIONS

- Voltage rating:125V AC/DC
- Current rating:1A AC/DC
- Withstanding Voltage:500V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥100MΩ
- Contact resistance:≤20mΩ
- After environmental testing:≤40mΩ

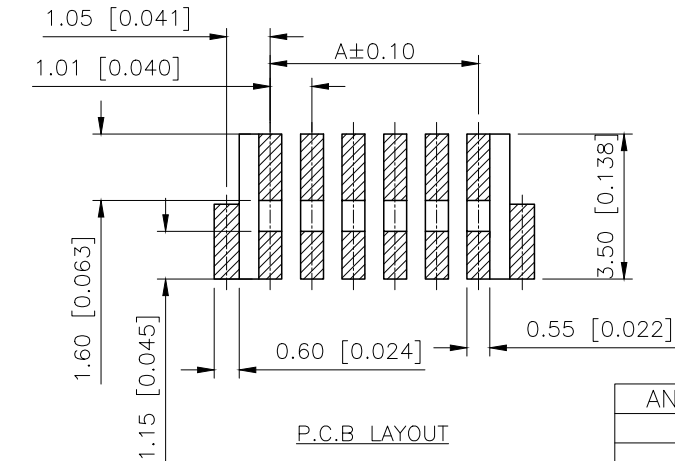

PART NO.:

X1002 W V S-XX C-6T SN
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ①Series No
- ②Category:W-Wafer
- ③Welding Board Angle:V-Stright 180°
- ④Welding Way:S-SMT
- ⑤Row No.Pin No:XX-02~20Pin
- ⑥Plug the Pin & Special No:C-Free Point on both sides
- ⑦Material:6T-PA6T 94V-0
- ⑧Planting Category: SN-Tin Plated

Poles	Dimensions(mm)		
	A	B	C
02	1.00	5.20	3.00
03	2.00	6.20	4.00
04	3.00	7.20	5.00
05	4.00	8.20	6.00
06	5.00	9.20	7.00
07	6.00	10.20	8.00
08	7.00	11.20	9.00
09	8.00	12.20	10.00
10	9.00	13.20	11.00
11	10.00	14.20	12.00
12	11.00	15.20	13.00
20	19.00	23.20	21.00

X1002WVS-XXC-6TSN	PA6T	Phosphor Bronze	X1002H-C
PART NO	Material	Material(Pin)	Suitable XKB Housing

ANGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 1.0mm Crimp Style Connector
CHECKED		UNIT: mm/in	PART NO.: X1002WVS-XXC-6TSN
APPROVED		SIZE: A4	DWG NO.: