
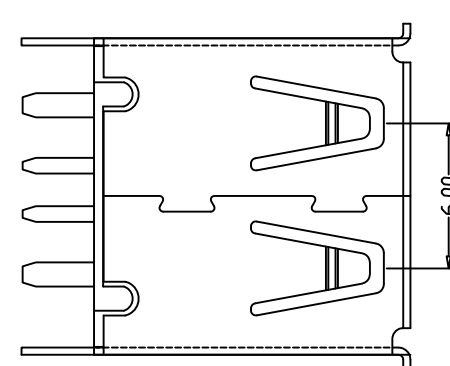
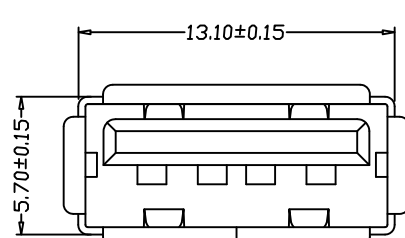
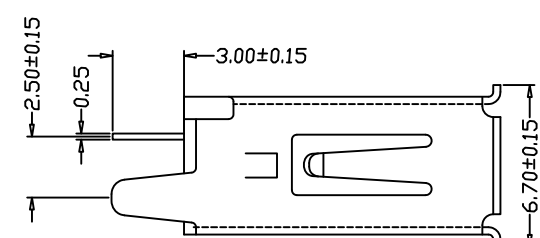


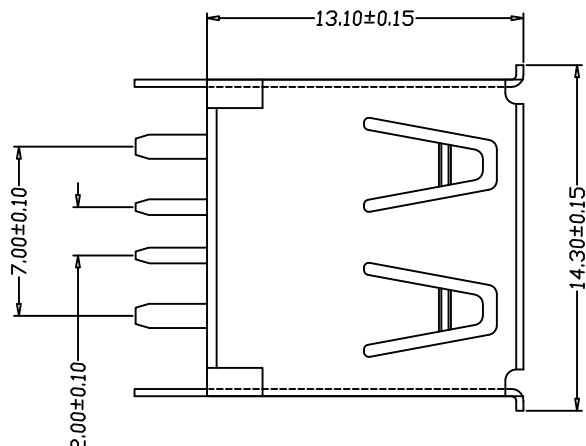


NOTES:
1. HOUSING: SEE NOTES, UL94V-0 .
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

SPECIFICATION:
1. ELECTRICAL CHARACTERISTIC:
Current rating:5.0A Max
CONTACT RESISTANCE: 30MΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN
2. MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN
5000 CYCLES EXTRACTION FORCE:3~35N

3. ENVIRONMENTAL:
OPERATING TEMPERATURE: -55℃+85℃

4. Contact finish:
01:Selective Gold Flash
02:Selective Gold 3U"
03:Selective Gold 5U"
04:Selective Gold 15U"
05:Selective Gold 30U"

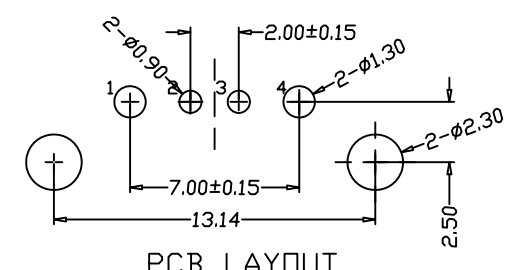

产品图				深圳市精拓金电子有限公司					
PRODUCT CHART DWG									
公差一览表									
TOLERANCE UNLESS OTHERWISE				单位	MM	制图	Z-Y-B	制图料号	916-252A1112Y10210
X.	±0.25	X.	±5.°	UNITS		DRAWING		PRODUCT PART NO.	
.X	±0.20	.X	±2.°	比例	1:1	审核		产品名称	AF大电流13.1直脚180度有边铜壳PBT橙色/5A
.XX	±0.15	.XX	±1.°	日期	2014.07.24	核准		PRODUCT NO.	
.XXX	±0.10	.XXX	±0.5°	DATE		APPD		角法	
								版本	AD
								VER	