


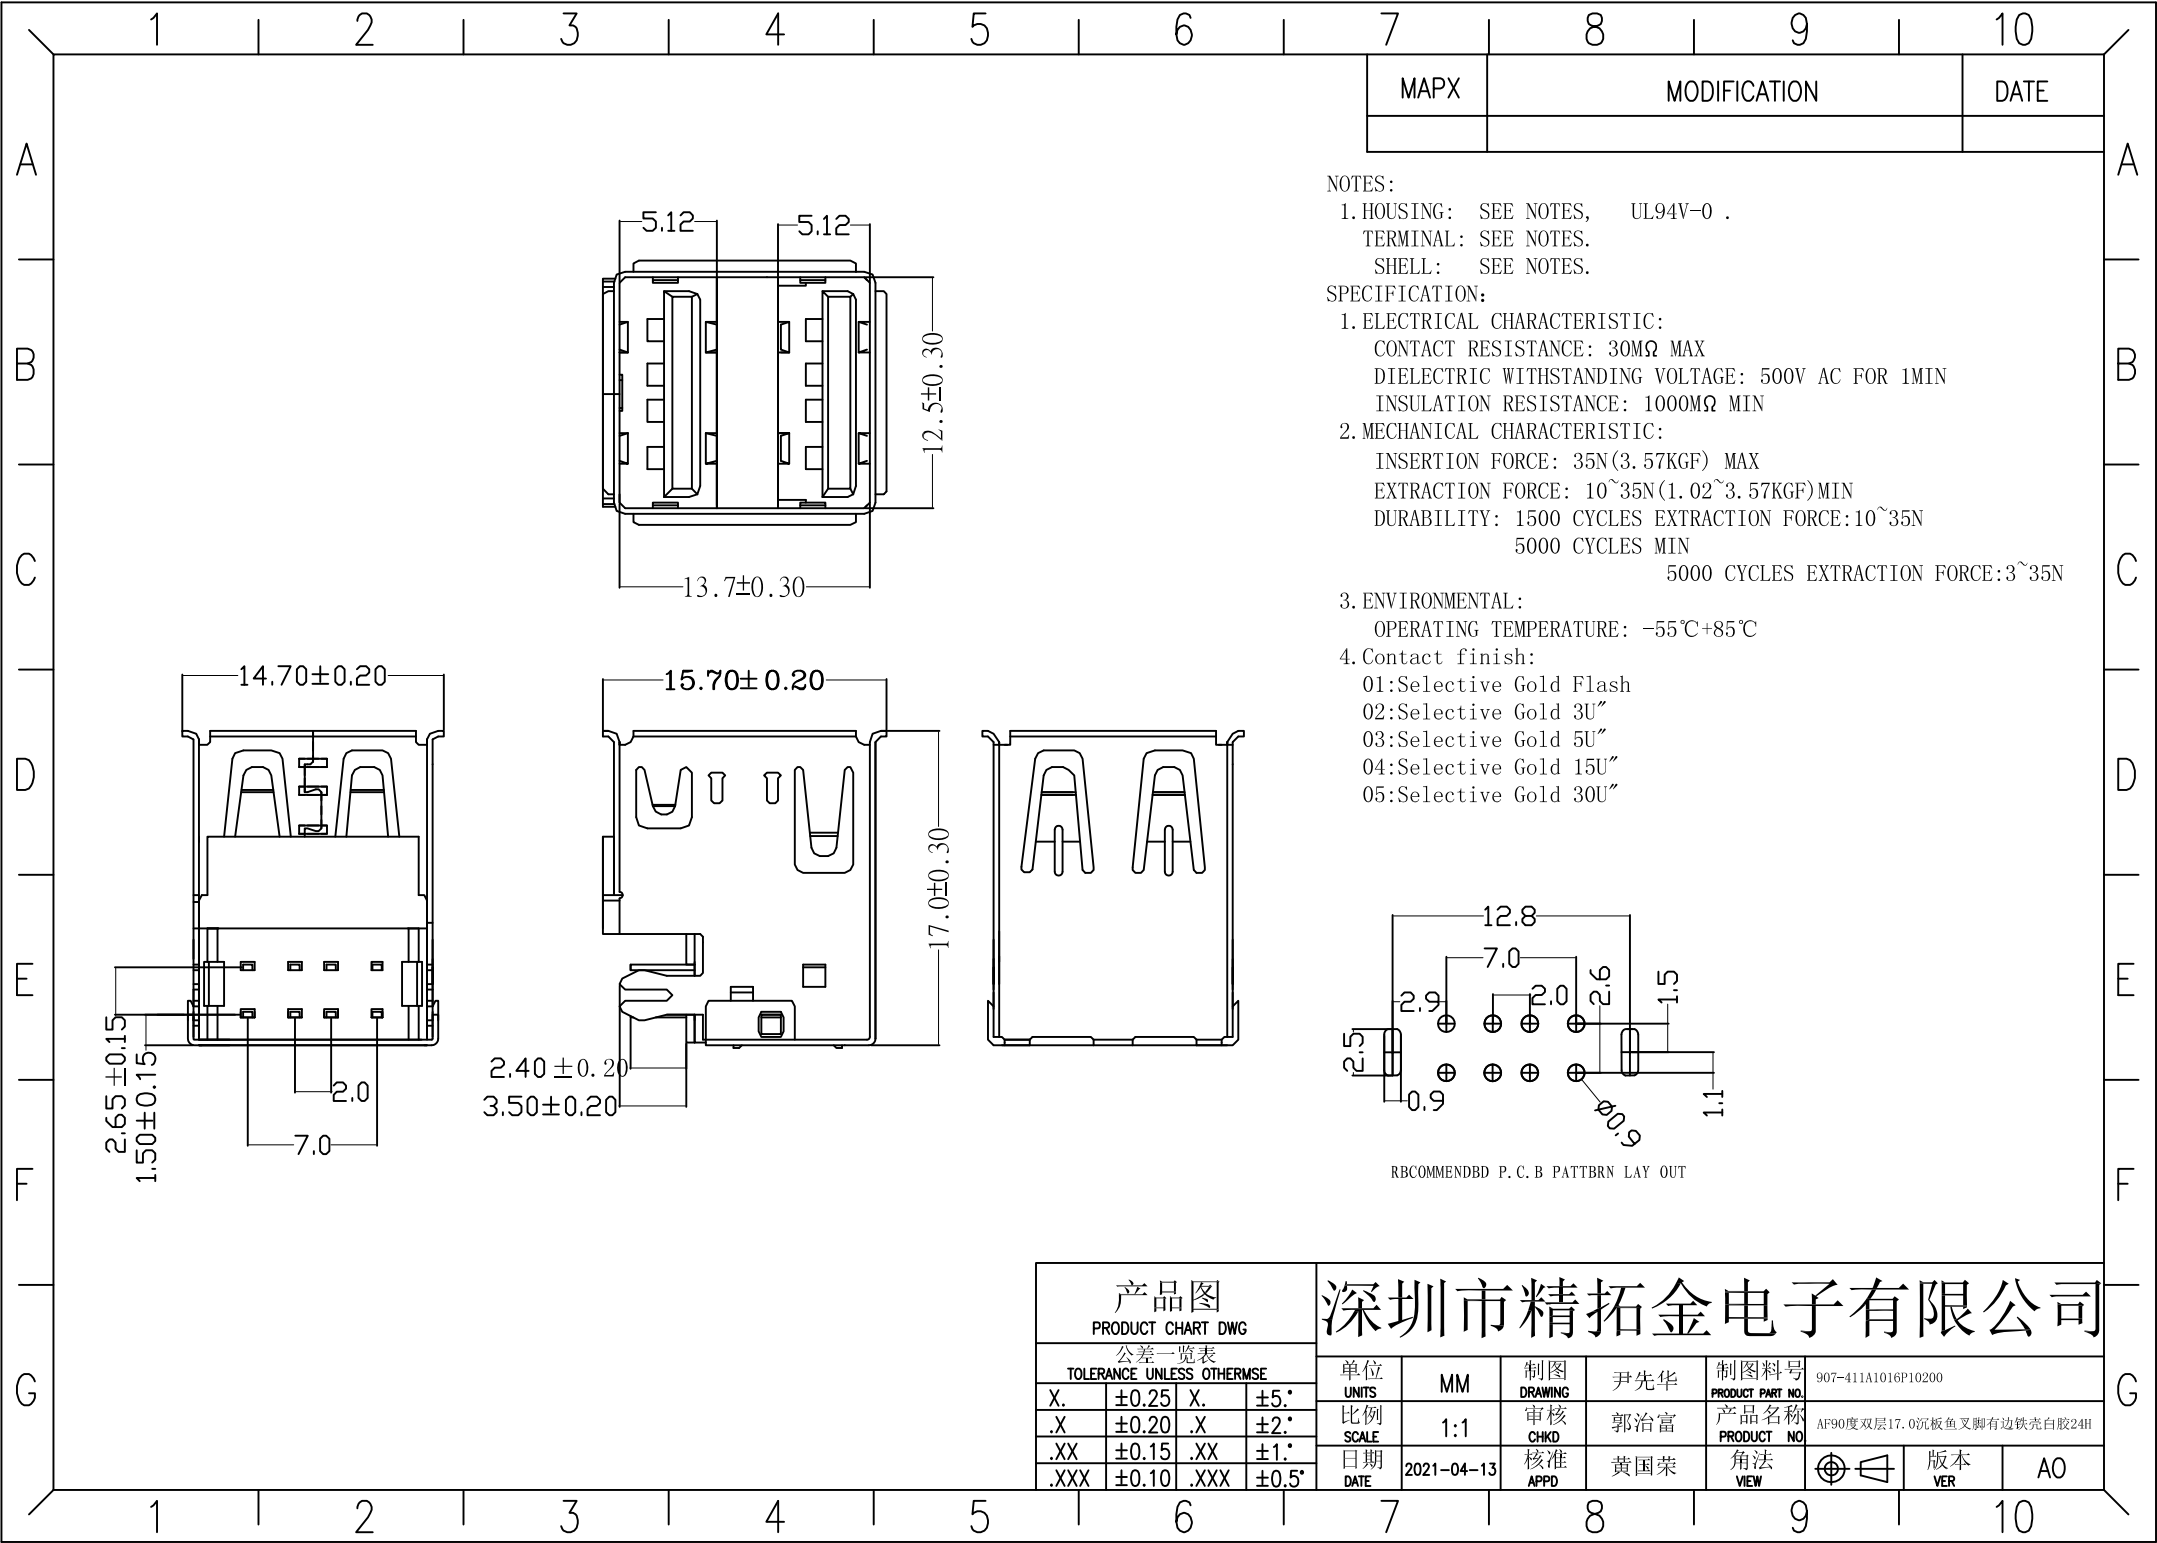

MAPX	MODIFICATION	DATE

NOTES:

1. HOUSING: SEE NOTES, UL94V-0 .

TERMINAL: SEE NOTES.

SHELL: SEE NOTES.

SPECIFICATION:

1. ELECTRICAL CHARACTERISTIC:

CONTACT RESISTANCE: 30MΩ MAX

DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN

INSULATION RESISTANCE: 1000MΩ MIN

2. MECHANICAL CHARACTERISTIC:

INSERTION FORCE: 35N(3.57KGF) MAX

EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN

DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N

5000 CYCLES MIN

5000 CYCLES EXTRACTION FORCE:3~35N

3. ENVIRONMENTAL:

OPERATING TEMPERATURE: -55℃+85℃

4. Contact finish:


01:Selective Gold Flash

02:Selective Gold 3U"

03:Selective Gold 5U"



04:Selective Gold 15U"

05:Selective Gold 30U"

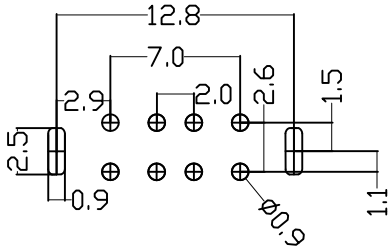

RBCOMMENDBD P. C. B PATTBRN LAY OUT

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司						
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	907-411A1016P10200	
X.	±0.25	X.	±5.°	比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	AF90度双层17.0沉板鱼叉脚有边铁壳白胶24H	
.XX	±0.15	.XX	±1.°	日期 DATE	2021-04-13	核准 APPD	黄国荣	角法 VIEW		版本 VER
.XXX	±0.10	.XXX	±0.5°							A0

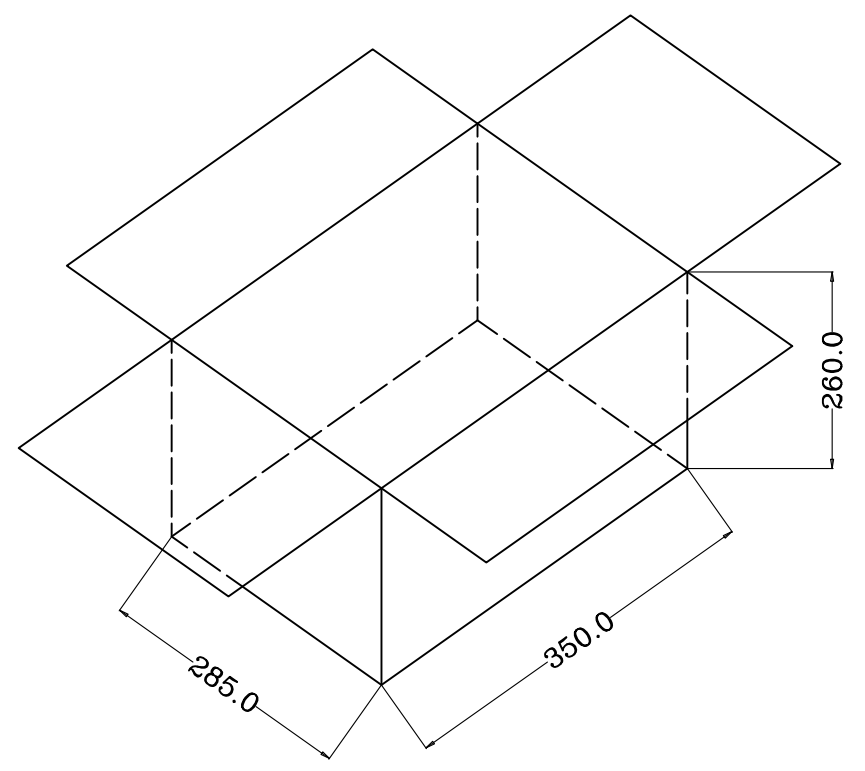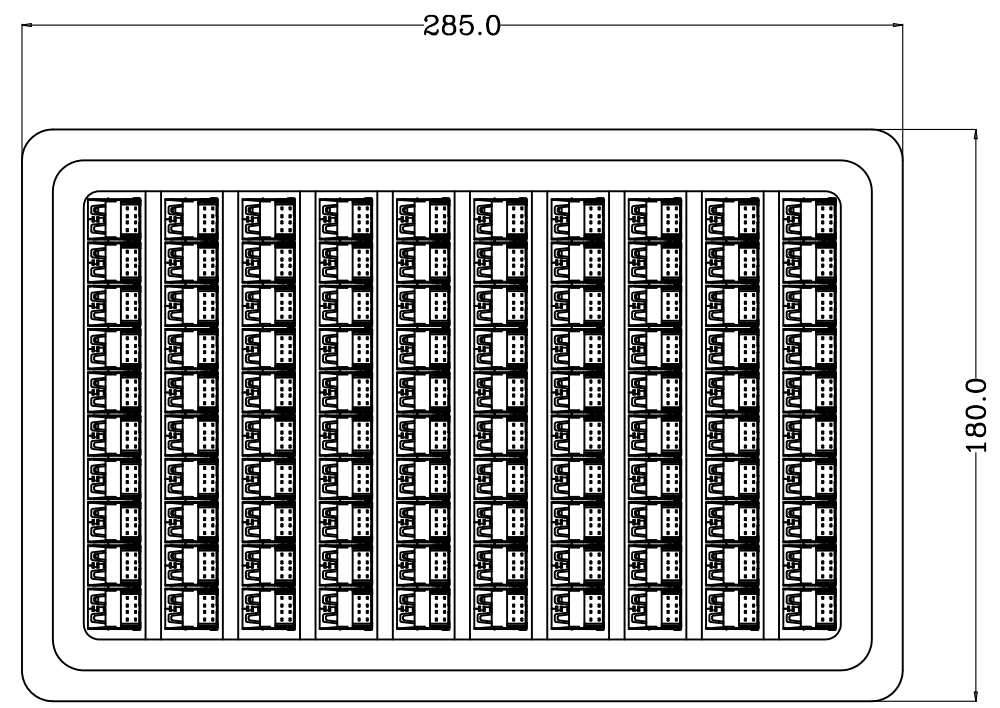

- 1, 包装盒为PVC透明吸塑盒
- 2, 每盒包装数量为100PCS
- 3, 每箱包装数量为3000PCS
- 4, 纸箱规格为350*285*260MM
- 5, 100PCS*10盘*2捆
- 6, 100PCS*5盘*2捆

产品图 PRODUCT CHART DWG				深圳市精拓金电子有限公司					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	尹先华	制图料号 PRODUCT PART NO.	907-411A1016P10200
X.	±1.00	X.	±5.°	比例 SCALE	1:1	审核 CHKD	郭治富	产品名称 PRODUCT NO.	AF90度双层17.0沉板鱼叉脚有边 铁壳白胶24H
.X	±0.80	.X	±2.°	日期 DATE	2021-04-13	核准 APPD	黄国荣	角法 VIEW	⊙ 45°
.XX	±0.50	.XX	±1.°					版本 VER	A0
.XXX	±0.30	.XXX	±0.5°						