

■ Features


- The world's lowest power programmable oscillator with 3.0 mA typical active current
- 1-110 MHz frequency range. Contact SiTime for frequencies between 80 MHz - 110 MHz
- High frequency stability of ± 25 PPM, ± 30 PPM, ± 50 PPM, ± 100 PPM
- Extremely fast start-up time of 3 ms
- Typical RMS period jitter of <6 ps
- Programmable standby or output enable modes
- Available in four industry standard packages: 2.5 x 2.0, 3.2 x 2.5, 5.0 x 3.2, 7.0 x 5.0 mm
- Outstanding mechanical robustness for portable applications
- All-silicon device with outstanding reliability of 2 FIT (10x improvement over quartz-based devices), enhancing system mean-time-to-failure (MTBF)
- Ultra short lead time
- Ideal for portable applications: portable media players, digital cameras, digital camcorders, portable navigation device, handheld gaming, cell phone and other handheld applications.
- Ideal for high-speed serial protocols such as: USB 1.1, USB 2.0, SATA, SAS, Fiber Channel, Firewire, Ethernet, PCI Express, etc

■ Specifications

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Output Frequency Range	f	1	–	110	MHz	Contact SiTime for frequencies between 80 MHz - 110 MHz
Frequency Tolerance	F_tol	-25	–	+25	PPM	Inclusive of: Initial tolerance, operating temperature, rated power, supply voltage change, load change, aging (1st yr @ 25°C), shock and vibration. Contact SiTime for ± 25 PPM support in 1.8 V.
		-30	–	+30	PPM	
		-50	–	+50	PPM	
		-100	–	+100	PPM	
Aging	Ag	-1.0	–	1.0	PPM	1st year at 25°C
Storage Temperature Range		-55	–	+125	°C	
Operating Temperature Range	T_use	-20	–	+70	°C	Extended Commercial
		-40	–	+85	°C	Industrial
Supply Voltage	Vdd	1.71	1.8	1.89	V	
		2.25	2.5	2.75	V	
		2.52	2.8	3.08	V	
		2.97	3.3	3.63	V	
Current Consumption	Idd		3.0	3.5	mA	No load condition, f = 20 MHz, Vdd = 1.8 V
			3.5	4.0	mA	No load condition, f = 20 MHz, Vdd = 2.5 V, 2.8 V or 3.3 V
Standby Current	I_std	–	3	10	μA	Output is Weakly Pulled Down, $\overline{ST}$ = GND, Vdd = 1.8 V
		–	7	10	μA	Output is Weakly Pulled Down, $\overline{ST}$ = GND, Vdd = 2.5 V, 2.8 V or 3.3 V
Duty Cycle	DC	45	50	55	%	All Vdds. f ≤ 70 MHz
		40	50	60	%	All Vdds. f > 70 MHz
Rise/Fall Time	Tr, Tf	–	1	2	ns	10% - 90% Vdd level, 15pF load
Output Voltage High	VOH	90%	–	–	Vdd	IOH = -4 mA (Vdd = 3.3 V) IOH = -3 mA (Vdd = 2.8 V and Vdd = 2.5 V) IOH = -2 mA (Vdd = 1.8 V)
Output Voltage Low	VOL	–	–	10%	Vdd	IOL = 4 mA (Vdd = 3.3 V) IOL = 3 mA (Vdd = 2.8 V and Vdd = 2.5 V) IOL = 2 mA (Vdd = 1.8 V)
Output Load	Ld	–	–	15	pF	Maximum frequency and supply voltage. Contact SiTime for higher output load strength option
Input Voltage High	VIH	70%	–	–	Vdd	Pin 1, OE or $\overline{ST}$
Input Voltage Low	VIL	–	–	30%	Vdd	Pin 1, OE or $\overline{ST}$
Input Current	I_in	–	–	10	μA	
Startup Time	T_osc	–	–	3	ms	Measured from the time Vdd reaches its rated minimum value
RMS Period Jitter	T_jitt	–	–	6	ps	f = 48 MHz, Vdd = 1.8 V
		–	–	4	ps	f = 48 MHz, Vdd = 2.5 V, 2.8 V or 3.3 V
RMS Phase Jitter (random)	T_phj	–	1.60	–	ps	f = 62.5 MHz, Integration bandwidth = 1.875 MHz to 20 MHz
		–	1.00	–	ps	f = 75 MHz, Integration bandwidth = 900 kHz to 7.5 MHz

■ Dimensions, Pin Description and Land Pattern


Dimensions (Unit: mm)^[1] 2.5 x 2.0 x 0.75 mm

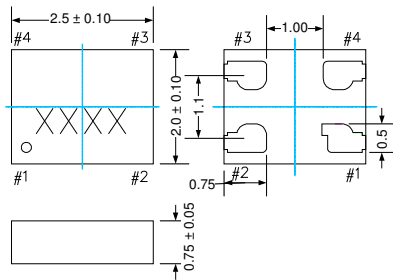


Pin #1 Functionality	
OE	
H or Open; specified frequency output	
L: output is high impedance	
$\overline{ST}$	
H or Open; specified frequency output	
L: output is low level (weak pull down)	

Pin Map	
Pin	Connection
1	OE/ $\overline{ST}$
2	GND
3	CLK
4	VDD

Recommended Land Pattern (Unit: mm)^[2]




Dimensions (Unit: mm)^[1] 3.2 x 2.5 x 0.75 mm

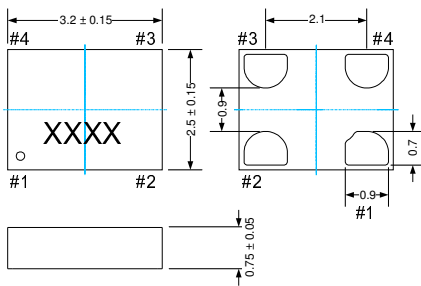


Pin #1 Functionality	
OE	
H or Open; specified frequency output	
L: output is high impedance	
$\overline{ST}$	
H or Open; specified frequency output	
L: output is low level (weak pull down)	

Pin Map	
Pin	Connection
1	OE/ $\overline{ST}$
2	GND
3	CLK
4	VDD

Recommended Land Pattern (Unit: mm)^[2]




Dimensions (Unit: mm)^[1] 5.0 x 3.2 x 0.75 mm

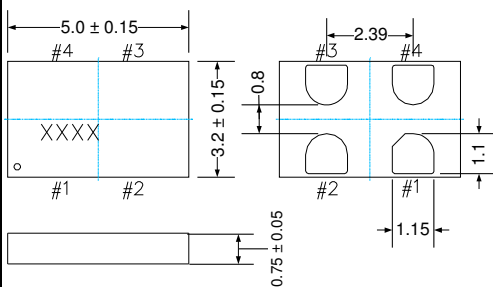


Pin #1 Functionality	
OE	
H or Open; specified frequency output	
L: output is high impedance	
$\overline{ST}$	
H or Open; specified frequency output	
L: output is low level (weak pull down)	

Pin Map	
Pin	Connection
1	OE/ $\overline{ST}$
2	GND
3	CLK
4	VDD

Recommended Land Pattern (Unit: mm)^[2]




Dimensions (Unit: mm)^[1] 7.0 x 5.0 x 0.90 mm

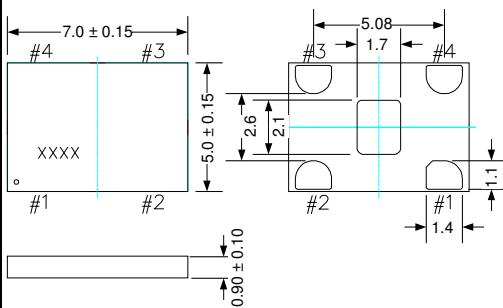

Pin #1 Functionality	
OE	
H or Open; specified frequency output	
L: output is high impedance	
$\overline{ST}$	
H or Open; specified frequency output	
L: output is low level (weak pull down)	


Pin Map	
Pin	Connection
1	OE/ $\overline{ST}$
2	GND
3	CLK
4	VDD

Recommended Land Pattern (Unit: mm)^[2]



Notes:

- XXXX top marking denotes manufacturing lot number.
- A capacitor of value 0.1 μ F between Vdd and GND is recommended.

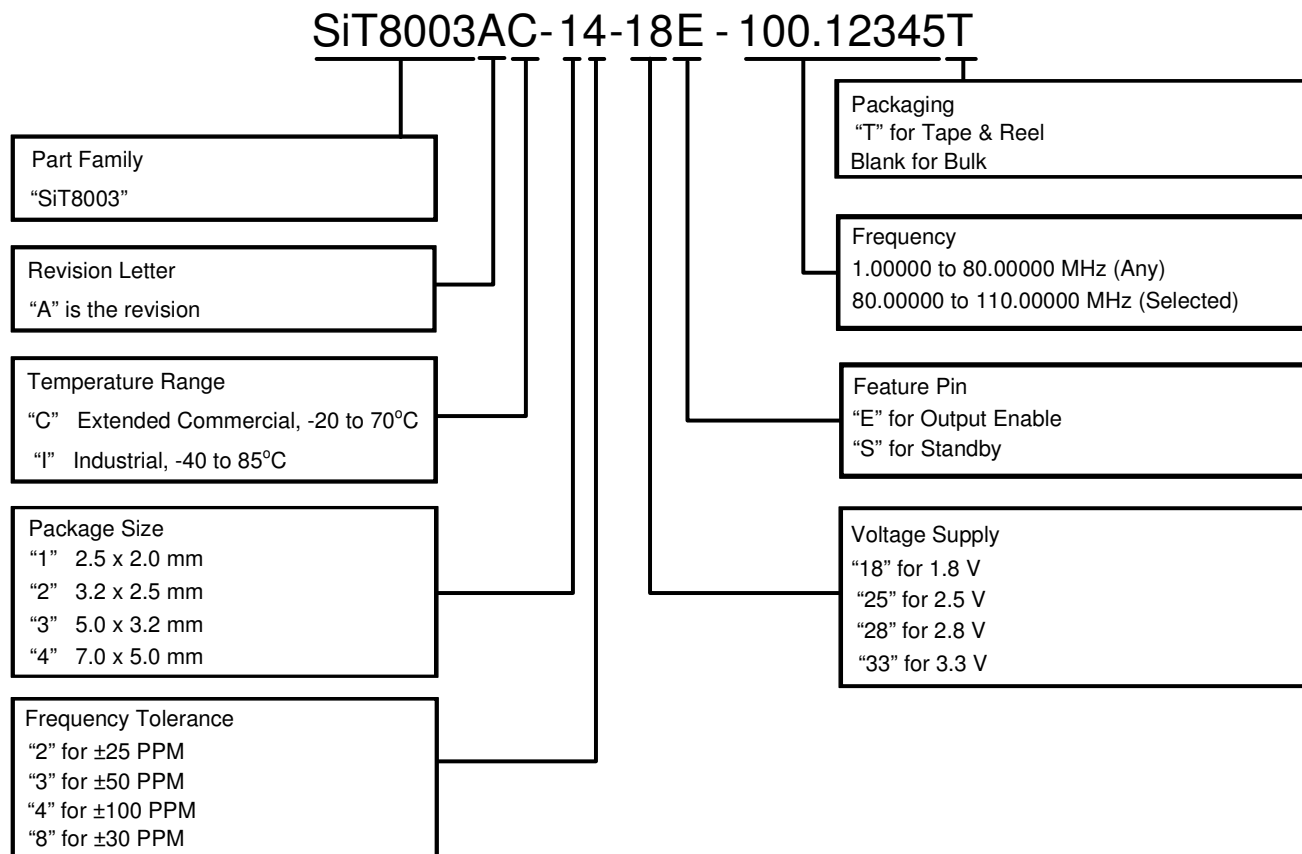

© SiTime Corporation 2009. The information contained herein is subject to change at any time without notice. SiTime assumes no responsibility or liability for any loss, damage or defect of a Product which is caused in whole or in part by (i) use of any circuitry other than circuitry embodied in a SiTime product, (ii) misuse or abuse including static discharge, neglect or accident, (iii) unauthorized modification or repairs which have been soldered or altered during assembly and are not capable of being tested by SiTime under its normal test conditions, or (iv) improper installation, storage, handling, warehousing or transportation, or (v) being subjected to unusual physical, thermal, or electrical stress.

Disclaimer: SiTime makes no warranty of any kind, express or implied, with regard to this material, and specifically disclaims any and all express or implied warranties, either in fact or by operation of law, statutory or otherwise, including the implied warranties of merchantability and fitness for use or a particular purpose, and any implied warranty arising from course of dealing or usage of trade, as well as any common-law duties relating to accuracy or lack of negligence, with respect to this material, any sitime product and any product documentation. products sold by sitime are not suitable or intended to be used in a life support application or component, to operate nuclear facilities, or in other mission critical applications where human life may be involved or at stake. all sales are made conditioned upon compliance with the critical uses policy set forth below.

CRITICAL USE EXCLUSION POLICY

BUYER AGREES NOT TO USE SITIME'S PRODUCTS FOR ANY APPLICATION OR IN ANY COMPONENTS USED IN LIFE SUPPORT DEVICES OR TO OPERATE NUCLEAR FACILITIES OR FOR USE IN OTHER MISSION-CRITICAL APPLICATIONS OR COMPONENTS WHERE HUMAN LIFE OR PROPERTY MAY BE AT STAKE.

SiTime owns all rights, title and interest to the intellectual property related to SiTime's products, including any software, firmware, copyright, patent, or trademark. The sale of SiTime products does not convey or imply any license under patent or other rights. SiTime retains the copyright and trademark rights in all documents, catalogs and plans supplied pursuant to or ancillary to the sale of products or services by SiTime. Unless otherwise agreed to in writing by SiTime, any reproduction, modification, translation, compilation, or representation of this material shall be strictly prohibited.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

SiTime:

[SiT8003AC-14-25E-10.00000](#) [SiT8003AC-14-25E-10.00000T](#) [SiT8003AC-14-25E-10.00000Y](#) [SiT8003AC-14-25E-12.00000](#) [SiT8003AC-14-25E-12.00000T](#) [SiT8003AC-14-25E-12.00000Y](#) [SiT8003AC-14-25E-16.00000](#) [SiT8003AC-14-25E-16.00000T](#) [SiT8003AC-14-25E-16.00000Y](#) [SiT8003AC-14-25E-20.00000](#) [SiT8003AC-14-25E-20.00000T](#) [SiT8003AC-14-25E-20.00000Y](#) [SiT8003AC-14-25E-24.00000](#) [SiT8003AC-14-25E-24.00000T](#) [SiT8003AC-14-25E-24.00000Y](#) [SiT8003AC-14-25E-25.00000](#) [SiT8003AC-14-25E-25.00000T](#) [SiT8003AC-14-25E-25.00000Y](#) [SiT8003AC-14-25E-27.00000](#) [SiT8003AC-14-25E-27.00000T](#) [SiT8003AC-14-25E-27.00000Y](#) [SiT8003AC-14-25E-4.00000](#) [SiT8003AC-14-25E-4.00000T](#) [SiT8003AC-14-25E-4.00000Y](#) [SiT8003AC-14-25E-40.00000](#) [SiT8003AC-14-25E-40.00000T](#) [SiT8003AC-14-25E-40.00000Y](#) [SiT8003AC-14-25E-50.00000](#) [SiT8003AC-14-25E-50.00000T](#) [SiT8003AC-14-25E-50.00000Y](#) [SiT8003AC-14-25E-8.00000](#) [SiT8003AC-14-25E-8.00000T](#) [SiT8003AC-14-25E-8.00000Y](#) [SiT8003AC-14-33E-10.00000](#) [SiT8003AC-14-33E-10.00000T](#) [SiT8003AC-14-33E-10.00000Y](#) [SiT8003AC-14-33E-12.00000](#) [SiT8003AC-14-33E-12.00000T](#) [SiT8003AC-14-33E-12.00000Y](#) [SiT8003AC-14-33E-16.00000](#) [SiT8003AC-14-33E-16.00000T](#) [SiT8003AC-14-33E-16.00000Y](#) [SiT8003AC-14-33E-20.00000](#) [SiT8003AC-14-33E-20.00000T](#) [SiT8003AC-14-33E-20.00000Y](#) [SiT8003AC-14-33E-24.00000](#) [SiT8003AC-14-33E-24.00000T](#) [SiT8003AC-14-33E-24.00000Y](#) [SiT8003AC-14-33E-25.00000](#) [SiT8003AC-14-33E-25.00000T](#) [SiT8003AC-14-33E-25.00000Y](#) [SiT8003AC-14-33E-27.00000](#) [SiT8003AC-14-33E-27.00000T](#) [SiT8003AC-14-33E-27.00000Y](#) [SiT8003AC-14-33E-4.00000](#) [SiT8003AC-14-33E-4.00000T](#) [SiT8003AC-14-33E-4.00000Y](#) [SiT8003AC-14-33E-40.00000](#) [SiT8003AC-14-33E-40.00000T](#) [SiT8003AC-14-33E-40.00000Y](#) [SiT8003AC-14-33E-50.00000](#) [SiT8003AC-14-33E-50.00000T](#) [SiT8003AC-14-33E-50.00000Y](#) [SiT8003AC-14-33E-8.00000](#) [SiT8003AC-14-33E-8.00000T](#) [SiT8003AC-14-33E-8.00000Y](#) [SiT8003AC-24-25E-10.00000](#) [SiT8003AC-24-25E-10.00000T](#) [SiT8003AC-24-25E-10.00000Y](#) [SiT8003AC-24-25E-12.00000](#) [SiT8003AC-24-25E-12.00000T](#) [SiT8003AC-24-25E-12.00000Y](#) [SiT8003AC-24-25E-16.00000](#) [SiT8003AC-24-25E-16.00000T](#) [SiT8003AC-24-25E-16.00000Y](#) [SiT8003AC-24-25E-20.00000](#) [SiT8003AC-24-25E-20.00000T](#) [SiT8003AC-24-25E-20.00000Y](#) [SiT8003AC-24-25E-24.00000](#) [SiT8003AC-24-25E-24.00000T](#) [SiT8003AC-24-25E-24.00000Y](#) [SiT8003AC-24-25E-25.00000](#) [SiT8003AC-24-25E-25.00000T](#) [SiT8003AC-24-25E-25.00000Y](#) [SiT8003AC-24-25E-27.00000](#) [SiT8003AC-24-25E-27.00000T](#) [SiT8003AC-24-25E-27.00000Y](#) [SiT8003AC-24-25E-4.00000](#) [SiT8003AC-24-25E-4.00000T](#) [SiT8003AC-24-25E-4.00000Y](#) [SiT8003AC-24-25E-40.00000](#) [SiT8003AC-24-25E-40.00000T](#) [SiT8003AC-24-25E-40.00000Y](#) [SiT8003AC-24-25E-50.00000](#) [SiT8003AC-24-25E-50.00000T](#) [SiT8003AC-24-25E-50.00000Y](#) [SiT8003AC-24-25E-8.00000](#) [SiT8003AC-24-25E-8.00000T](#) [SiT8003AC-24-25E-8.00000Y](#) [SiT8003AC-24-33E-10.00000](#)