

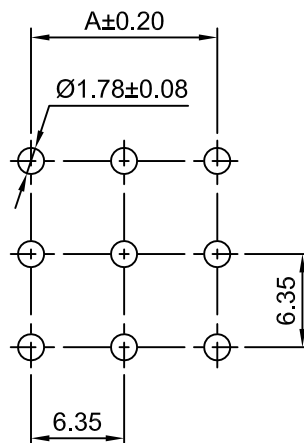
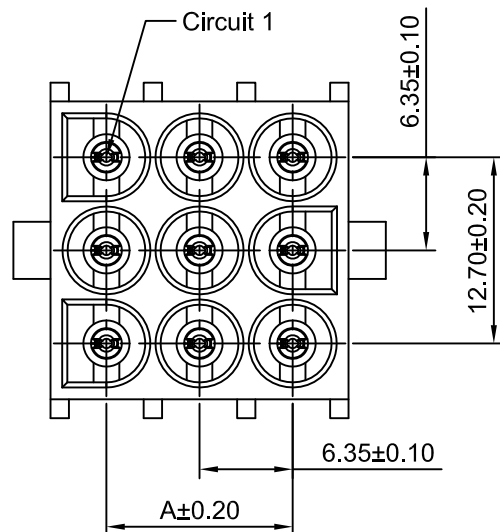


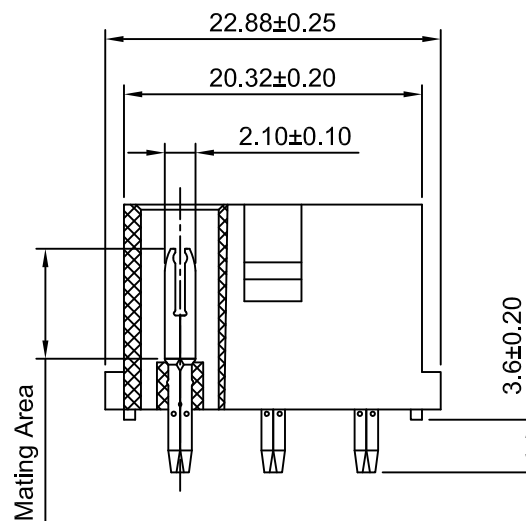

P.C.B LAYOUT
TOLERANCE:±0.05

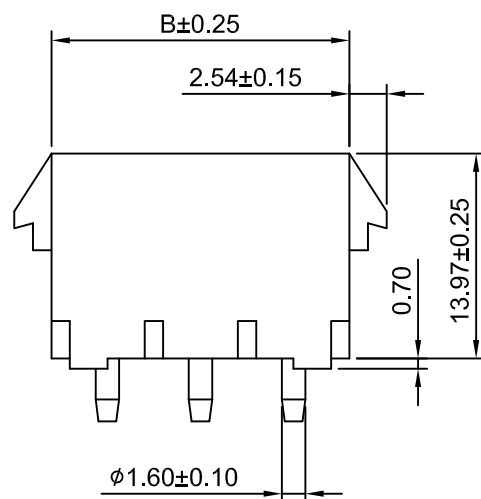

Ordering Information:

C6351WV-3xXP-M - ** - ***
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-2(Natural)

V0: Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Finish:

(Blank): Tin over Nickel


G: Gold-flash

G15: 15µin (0.38µm) MIN.Select Gold(Mating Area)

100µin (2.54µm) MIN.Select Tin

G30: 30µin (0.76µm) MIN.Select Gold(Mating Area)

100µin (2.54µm) MIN.Select Tin



SPECIFICATIONS:

Current Rating: 13.5A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 3.5mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 5000V AC/minute

Pin Material: Phosphor Bronze

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C6351WV-3x2P-M	6.35	13.97
C6351WV-3x3P-M	12.70	20.32
C6351WV-3x4P-M	19.05	26.67
C6351WV-3x5P-M	25.40	33.02

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	6.35mm PITCH VERTICAL TRIPLE ROW WAFER -MALE TYPE	
DRWN	CHKD	APPR	DRAWING NO.	
Chengbiao Ye	Diankui Wan	Jack Yin	C6351WV-3xXP-M	
General Tolerances			THIRD ANGLE PROJECTION	
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			REV A3	

A2	CHANGE THE DRAWING	2023.02.25
A2	CHANGE THE DRAWING	2022.02.10
A1	CHANGE THE DRAWING	2021.03.17
A0	NEW RELEASE	2019.01.19
REV	DESCRIPTION	DATE