
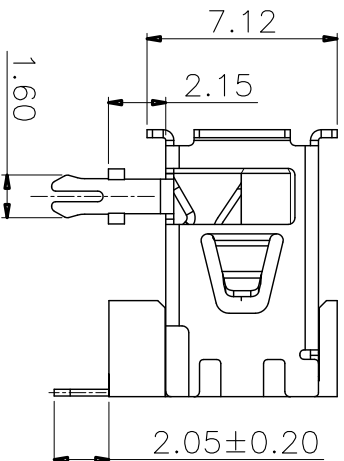
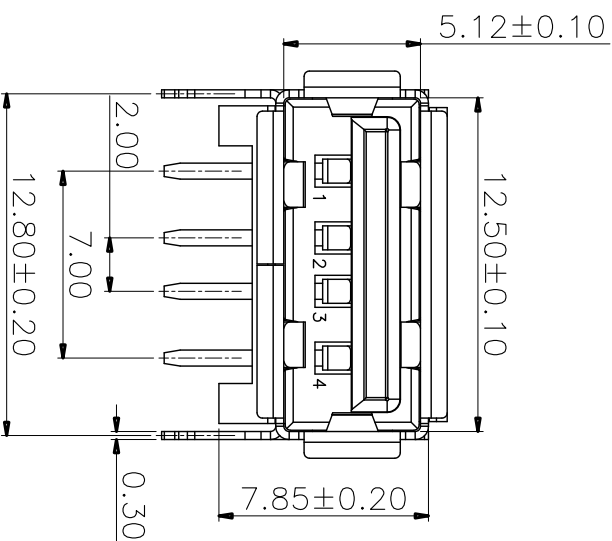
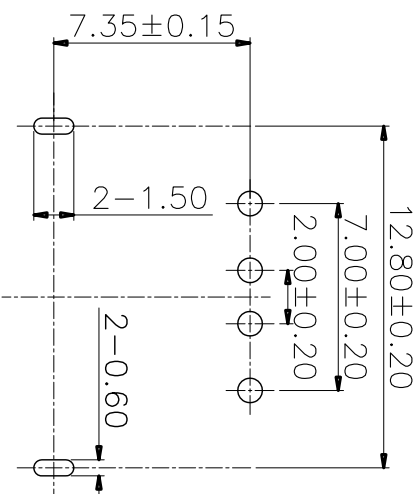


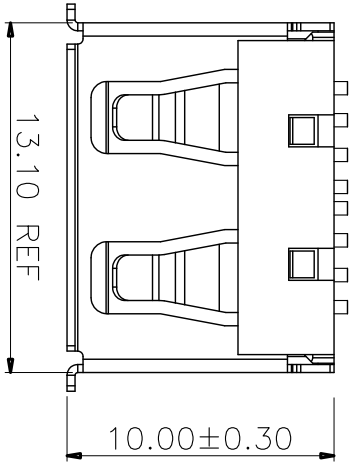

PCB HOLES(THE PATTERN SIDE) t=1.6mm
NOTE: GENERAL TOLERANCE: ±0.1mm

- NOTES:
- 1. HOUSING: SEE NOTES,
 - TERMINAL: SEE NOTES,
 - SHELL: SEE NOTES.
- SPECIFICATION:
- 1. ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: 30MΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN
 - 2. MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF) MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN
5000 CYCLES EXTRACTION FORCE:3~35N
 - 3. ENVIRONMENTAL:
OPERATING TEMPERATURE: -55℃+85℃
 - 4. Contact finish:
01:Selective Gold Flash
02:Selective Gold 3U"
03:Selective Gold 5U"
04:Selective Gold 15U"
05:Selective Gold 30U"

深圳市精拓金电子有限公司

品名 PRODUCT NAME				深圳市精拓金电子有限公司			
公差 TOLERANCE UNLESS OTHERWISE SPECIFIED				UNIT	MM	1/16"	Z-Y-B
X	±0.25	X	±5.°	UNIT	1:1	1/16"	AF10.0B 款前两侧有边铁壳LCP 黑胶
X	±0.20	X	±2.°	SCALE			
.XX	±0.15	.XX	±1.°	BILL	2016.02.04	1/32"	AF10.0B 款前两侧有边铁壳LCP 黑胶
.XXX	±0.10	.XXX	±0.5°	DATE		1/16"	