




**Part Number :** [1727040150](#)  
**Product Description :** FCT High Power Contact, Female, Straight, Crimp, 0.80µm Gold Mating Plating, 0.20µm Gold Termination Plating, Split Tine, 10.0A, 20-16 AWG  
**Series Number :** 172704  
**Status :** Active  
**Product Category :** D-Sub Contacts  
**Engineering Number :** FMP002S103

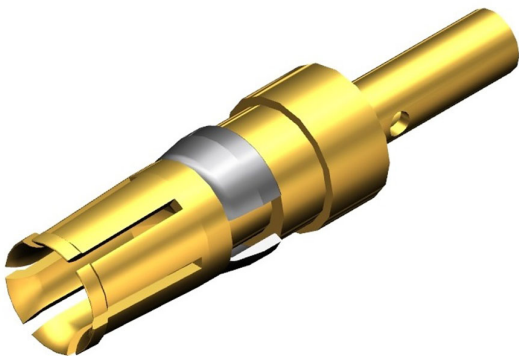

---

## Documents & Resources

### Drawings

[Drawing 1727040150\\_sd.pdf](#)

### 3D Models and Design Files

[3D Model 1727040150\\_stp.zip](#)

### Specifications

[Application Specification 2195600660-000.pdf](#)  
[Packaging Specification 1731120008-PK-000.pdf](#)  
[Product Specification 2195600660-000.pdf](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Compliant with Exemption 44; 3; 34; 33
China RoHS	Not Relevant
EU ELV	Not Relevant
Low-Halogen Status	Not Relevant
REACH SVHC	Contains Lead per D(2024)4144-DC (27 June 2024)
EU RoHS	Compliant with Exemption 6(c) per EU 2015/863

### Multiple Part Product Compliance Statements

- Eu RoHS

- REACH SVHC

- Low-Halogen

#### Multiple Part Industry Compliance Documents

- IPC 1752A Class C

- IPC 1752A Class D

- Molex Product Compliance Declaration

- IEC-62474

- chemSHERPA (xml)

#### EU RoHS Certificate of Compliance

---

## Part Details

### General

Status	Active
Category	D-Sub Contacts
Series	172704
Description	FCT High Power Contact, Female, Straight, Crimp, 0.80µm Gold Mating Plating, 0.20µm Gold Termination Plating, Split Tine, 10.0A, 20-16 AWG
Contact Type	High Power
Magnetic	Yes
Product Family	FCT D-Sub Connectors
Product Name	FCT Products
Type	Mixed Layout
UPC	889056020619

### Electrical

Current - Maximum per Contact	10.0A
-------------------------------	-------

### Physical

Durability (mating cycles max)	500
Gender	Female
Material - Contact	Copper Alloy
Material - Plating Mating	Gold over Nickel
Material - Plating Termination	Gold over Nickel
Material - Retaining Clip	Copper Alloy

Net Weight	1.800/g
Orientation	Straight
Packaging Type	Bag
Plating min - Mating	0.800µm
Plating min - Termination	0.200µm
Temperature Range - Operating	-55° to +155°C
Termination Style	Crimp
Wire Size (AWG)	16, 18, 20

Use with Part(s)

Description	Part Number
Use With	FCT Mixed Layout Connectors

Application Tooling

Global

Description	Part Number
FCT Hand Crimp Tool, 8-Step Adjust	<u>1731121731</u>
FCT Locator for High Power Contacts	<u>1731121734</u>
FCT Removal Tool for Size 8 Contacts	<u>1731121747</u>