

EVVOSEMI[®]

THINK CHANGE DO



ESD




TVS



MOS



LDO



Diode



Sensor



DC-DC

Product Specification

▶ Domestic	Part Number	BAW56/BAV70/BAV99
▶ Overseas	Part Number	BAW56/BAV70/BAV99
▶ Equivalent	Part Number	BAW56/BAV70/BAV99



EV is the abbreviation of name EVVO

Switching Diodes


FEATURES

- Fast Switching Speed
- For General Purpose Switching Applications
- High Conductance


SOT-23



BAW56



BAV70



BAV99

Maximum Ratings @Ta=25°C

Parameter	Symbol	Value	Unit
Reverse Voltage	V_R	70	V
Forward Current	I_F	200	mA
Non-Repetitive Peak Forward Surge Current @t=8.3ms	I_{FSM}	2.0	A
Power Dissipation	P_D	225	mW
Thermal Resistance Junction to Ambient	R_{thJA}	556	°C/W
Operation Junction and Storage Temperature Range	T_J, T_{STG}	-55 ~ +150	°C

Electrical Characteristics@Ta=25°C

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Reverse breakdown voltage	V_R	$I_R=100\mu A$	70			V
Forward voltage	V_{F1}	$I_F=1\text{ mA}$			0.715	V
	V_{F2}	$I_F=10\text{ mA}$			0.855	V
	V_{F3}	$I_F=50\text{ mA}$			1	V
	V_{F4}	$V_R=150\text{ mA}$			1.25	V
Reverse current	I_R	$V_R=70\text{ V}$			2.5	μA
Capacitance between terminals	t_{rr}	$V_R=0, f=1\text{ MHz}$			1.5	pF
Reverse recovery time	t_{rr}	$I_F=I_R=10\text{ mA}, I_{rr}=0.1 \times I_R, R_L=100\Omega$			6	ns

Fig.1 Power Derating Curve

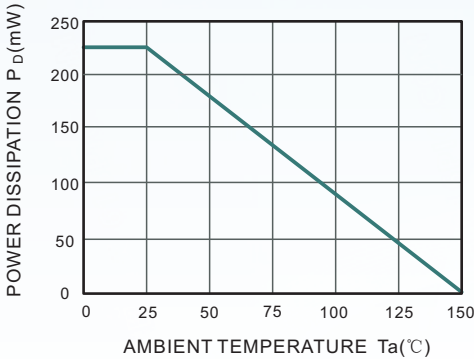


Fig.2 Reverse Characteristics

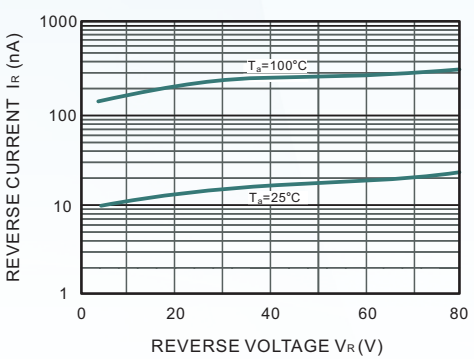


Fig.3 Forward Characteristics



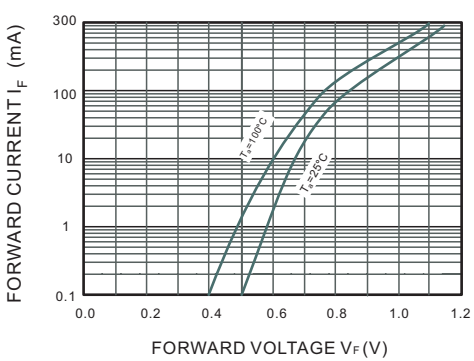



Fig.4 Capacitance Characteristics

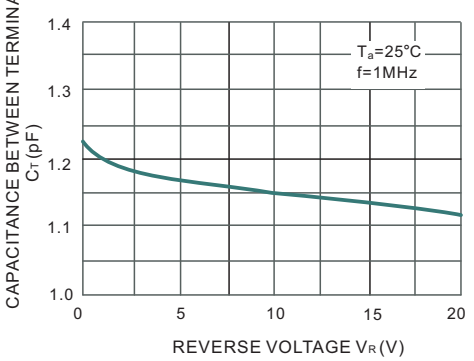

SOT-23 Package Outline Dimensions

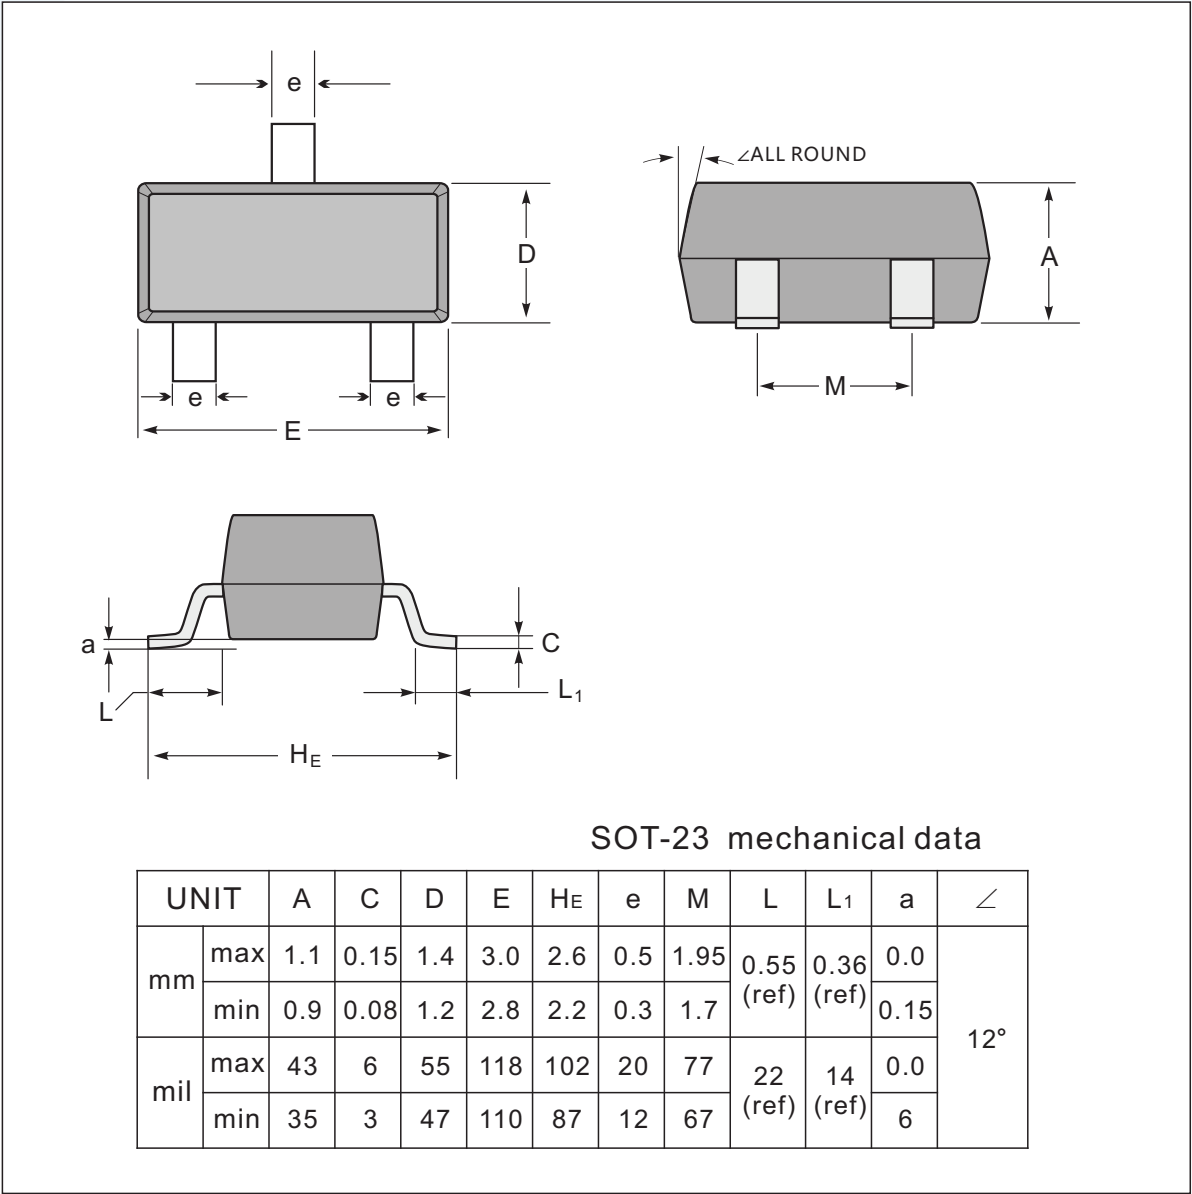

The recommended mounting pad size

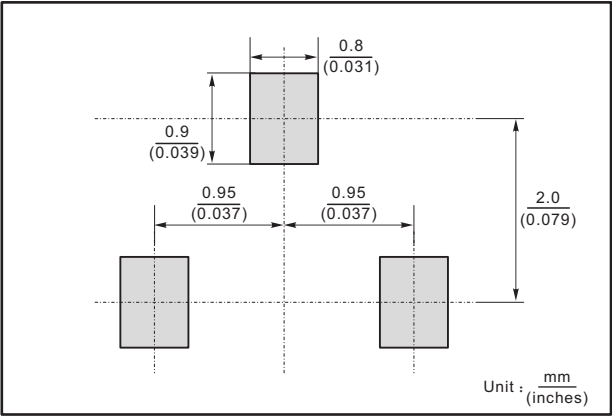


Marking


Type number	Marking code
BAW56	A1
BAV70	A4
BAV99	A7

SOT-23 Packing

1.The method of packaging and dimension are shown as below figure. (Dimension in mm)

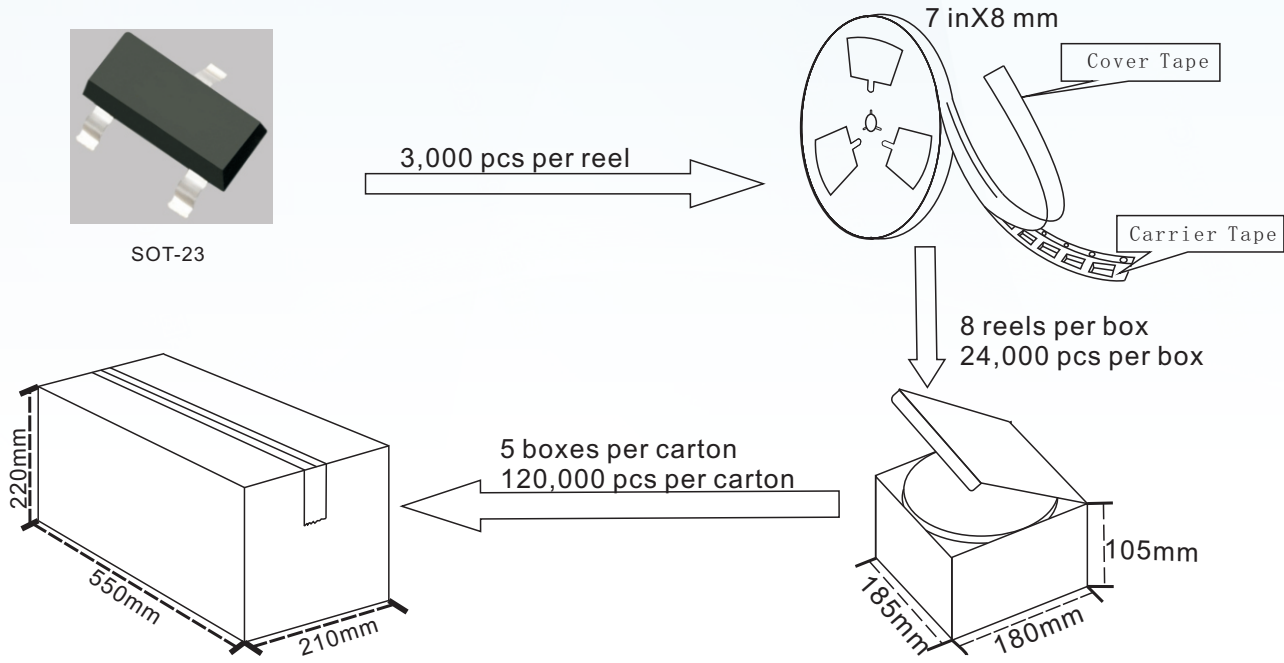


SOT-23 Embossed Carrier Tape

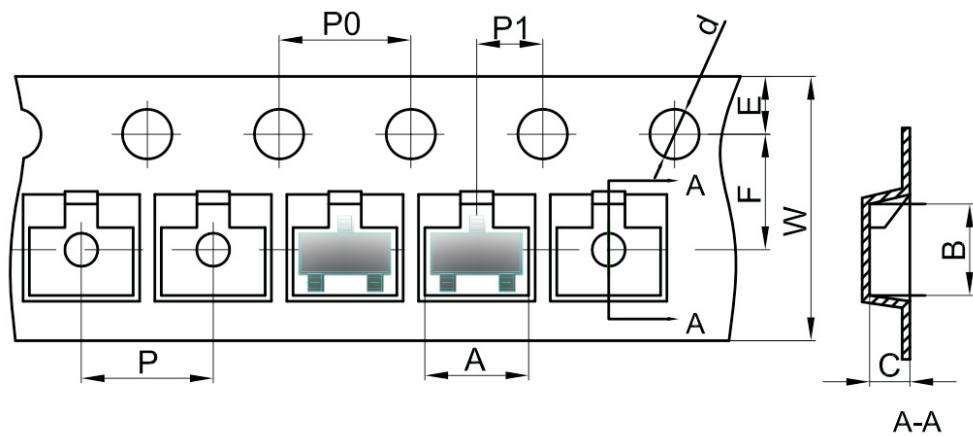

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-23	3.15	2.77	1.22	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOT-23 Tape Leader and Trailer

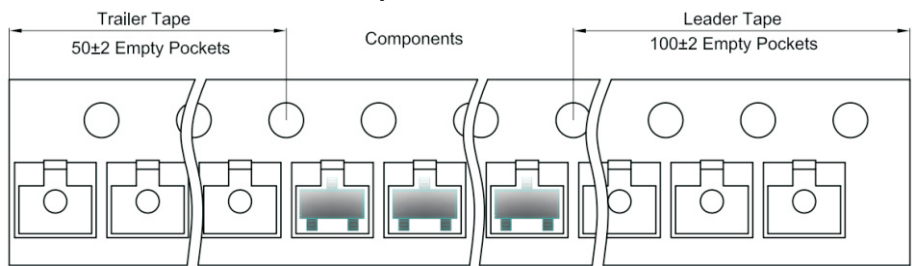

Disclaimer

EVVOSEMI ("EVVO") reserves the right to make corrections, enhancements, improvements, and other changes to its products and services at any time, and to discontinue any product or service without notice.

EVVO warrants the performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used as deemed necessary by EVVO to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

Customers should obtain and confirm the latest product information and specifications before final design, purchase, or use. EVVO makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does EVVO assume any liability for application assistance or customer product design. EVVO does not warrant or accept any liability for products that are purchased or used for any unintended or unauthorized application.

EVVO products are not authorized for use as critical components in life support devices or systems without the express written approval of EVVOSEMI.

The EVVO logo and EVVOSEMI are trademarks of EVVOSEMI or its subsidiaries in relevant jurisdictions. EVVO reserves the right to make changes without further notice to any products herein.