

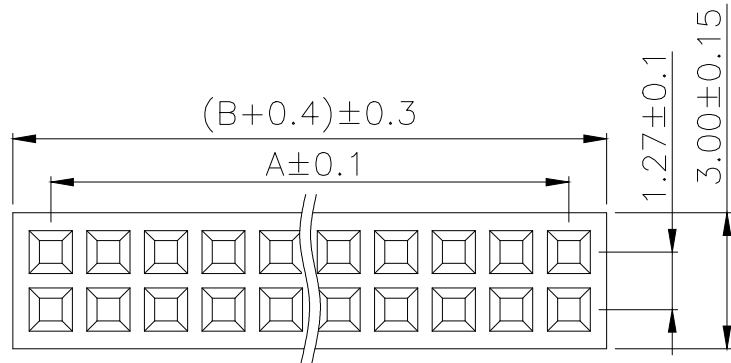
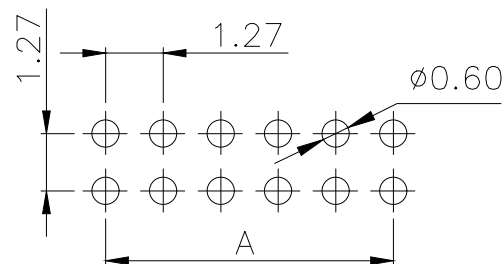


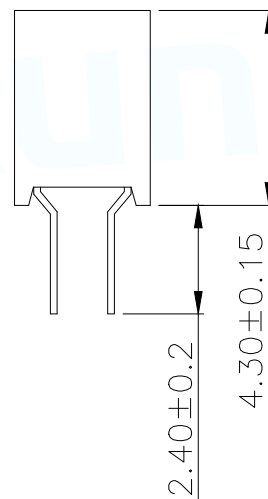

SPECIFICATIONS
Current Rating: 1.0 Amps
Withstanding Voltage: AC 500V
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Operation Temperature: -40° to +105°
Insulator Material: Polyester (UL94V-0)
Contact Material: Phosphor bronze
Standard: PA6T
Contact Plating: Gold Flash
Max. Processing Temp: 240°C for 30-60 seconds
(260°C for 5 seconds)

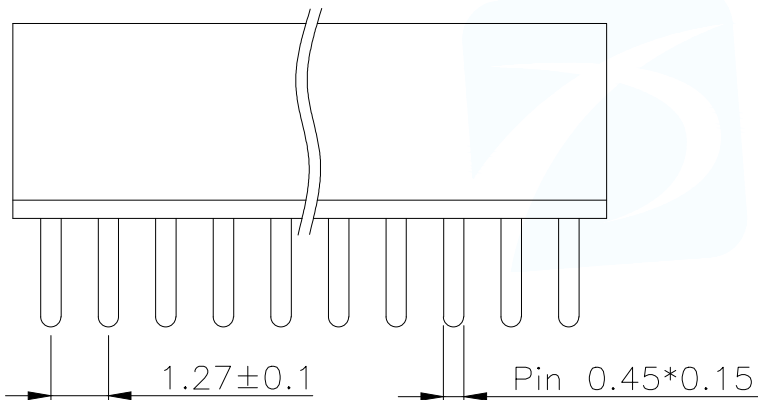

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

P/N	PIN	DIM.A	DIM.B
FH1.27-01-01PZS	2*1	0.00	1.27
FH1.27-01-02PZS	2*2	1.27	2.54
FH1.27-01-03PZS	2*3	2.54	3.81
FH1.27-01-04PZS	2*4	3.81	5.08
FH1.27-01-05PZS	2*5	5.08	6.35
FH1.27-01-06PZS	2*6	6.35	7.62
FH1.27-01-07PZS	2*7	7.62	8.89
FH1.27-01-08PZS	2*8	8.89	10.16
FH1.27-01-09PZS	2*9	10.16	11.43
.....			
FH1.27-01-50PZS	2*50	(PIN-1)x1.27	(PIN)x1.27

PART NUMBER DESCRIPTION:

FH1.27-01-NPZS

(D=单排; S=双排)
(Z=直脚; W=弯脚)
(PIN数量; 01.....50PIN)
(排针开关)

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co., Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: 1.27FH H4.3 2xnPin 180度 W3.0 U型 PC2.4 6T
			PAR FH1.27-01-NPZS
DECIMALS:	ANGLES:		DWN
X.±0.30	X°±5'		CHKD
X.X±0.20	X.X°±1'	CUSTOMER COPY	APVD
X.XX±0.10	X.XX°±0.5'		SCALE N:A UNIT:MM
		SIZE:A4	SHEET:1F1
			REV:A