


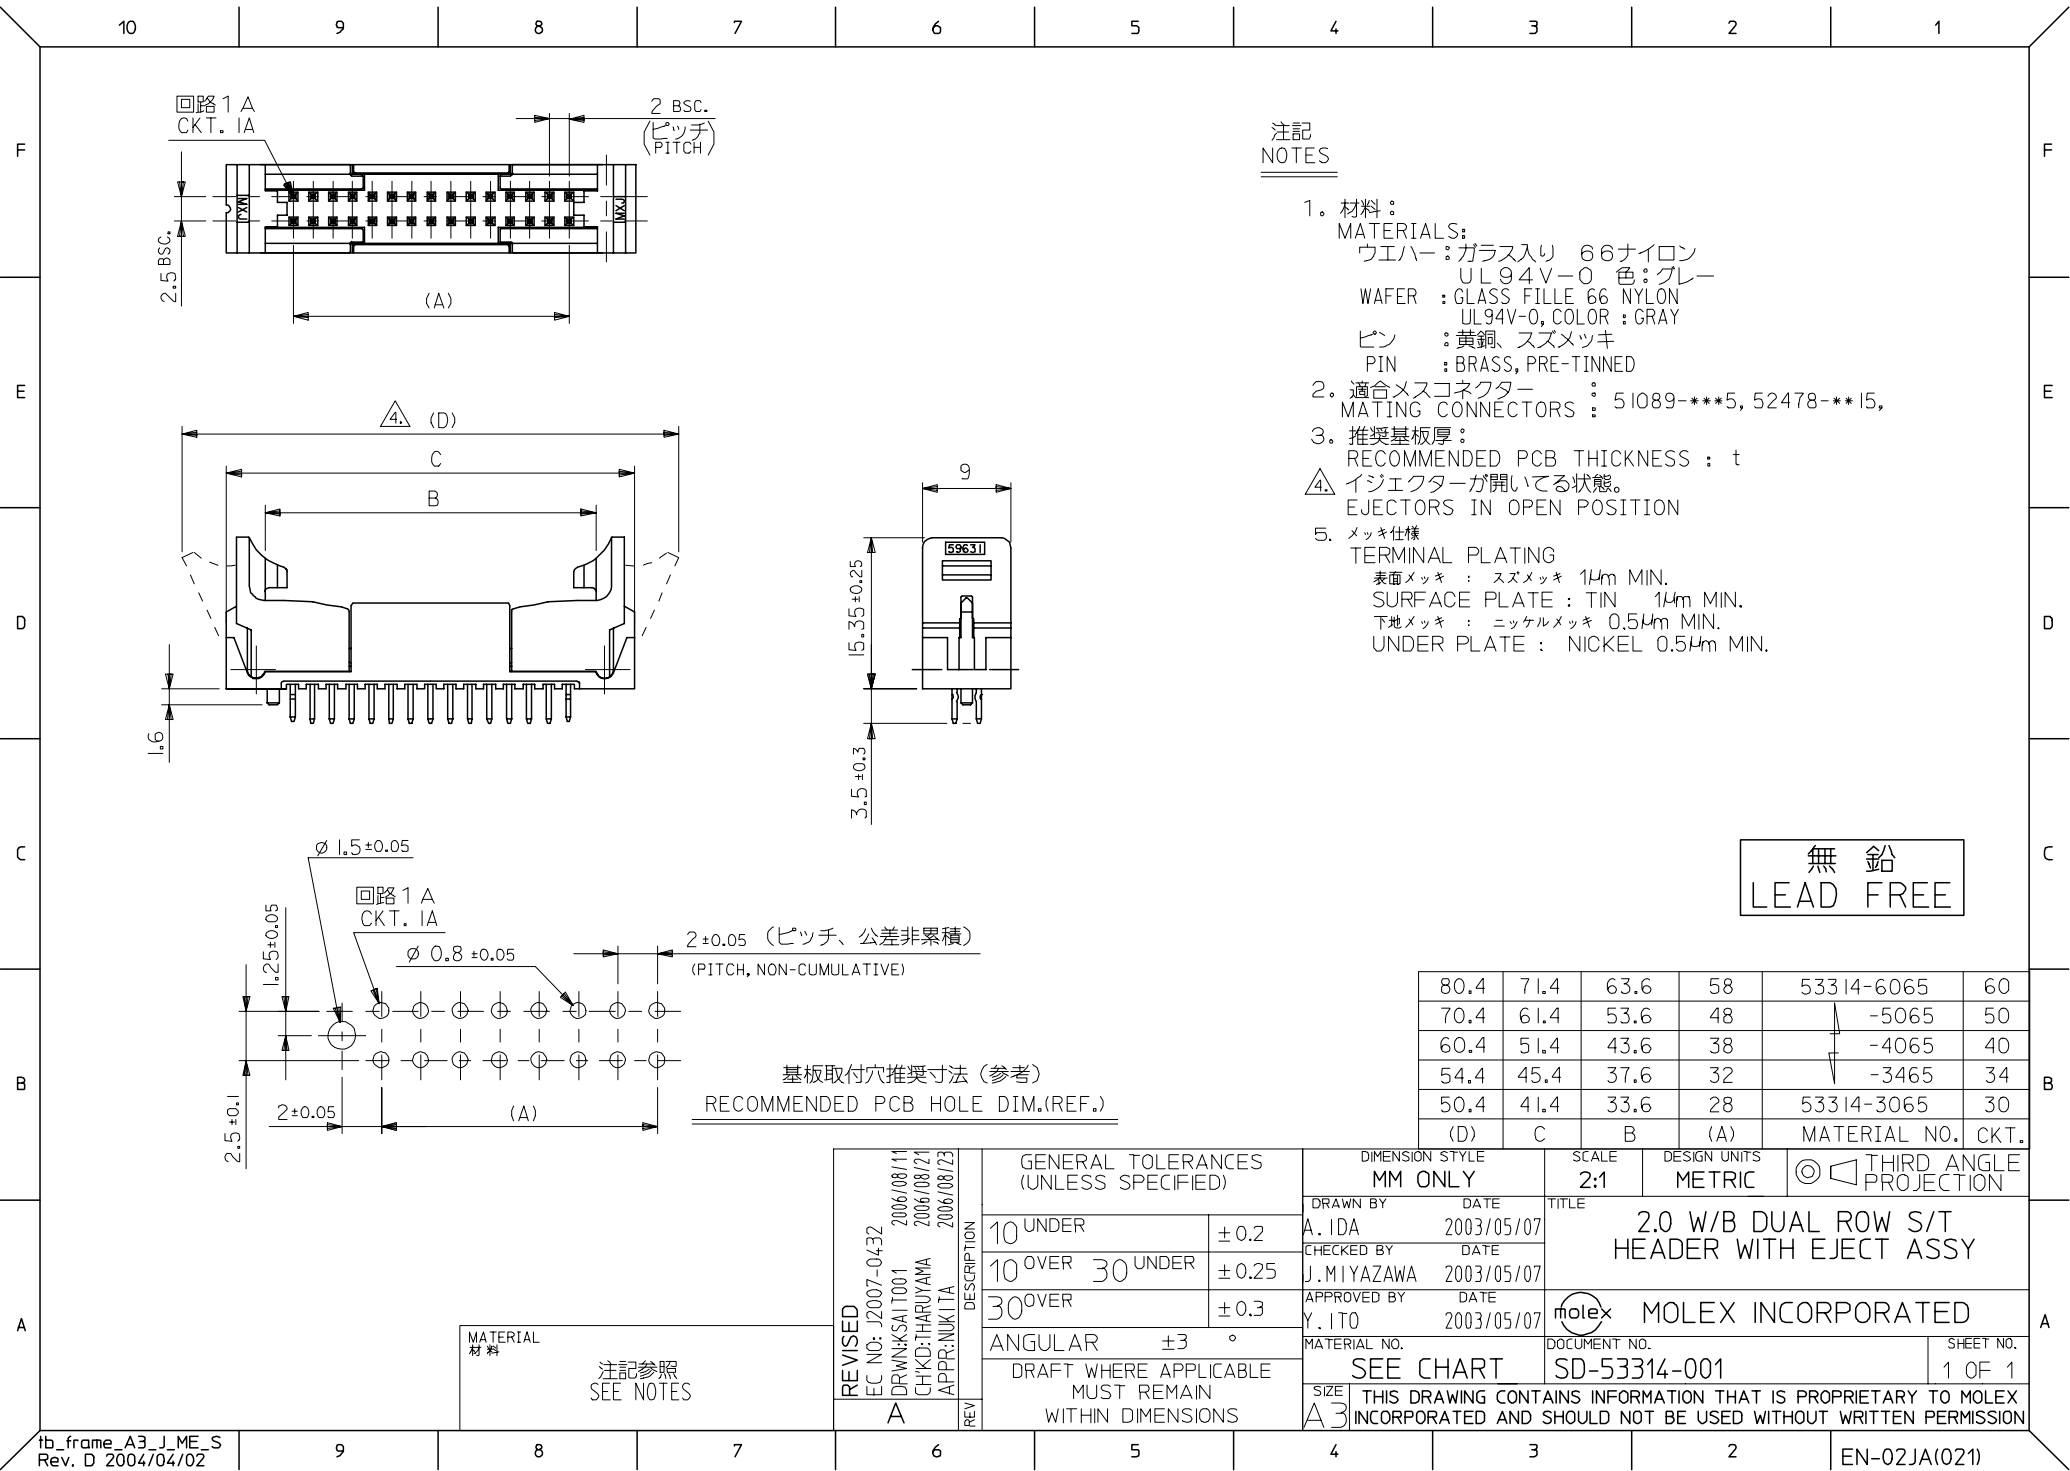

注記
NOTES

1. 材料 :
MATERIALS:
ウエハー : ガラス入り 66 ナイロン
UL94V-0 色 : グレー
WAFER : GLASS FILLE 66 NYLON
UL94V-0, COLOR : GRAY
ピン : 黄銅、スズメッキ
PIN : BRASS, PRE-TINNED
2. 適合メスコネクター : 51089-***5, 52478-***15,
MATING CONNECTORS
3. 推奨基板厚 :
RECOMMENDED PCB THICKNESS : t
4. イジェクターが開いてる状態。
EJECTORS IN OPEN POSITION
5. メッキ仕様
TERMINAL PLATING
表面メッキ : スズメッキ 14μm MIN.
SURFACE PLATE : TIN 14μm MIN.
下地メッキ : ニッケルメッキ 0.5μm MIN.
UNDER PLATE : NICKEL 0.5μm MIN.

無鉛
LEAD FREE

80.4	71.4	63.6	58	53314-6065	60
70.4	61.4	53.6	48	-5065	50
60.4	51.4	43.6	38	-4065	40
54.4	45.4	37.6	32	-3465	34
50.4	41.4	33.6	28	53314-3065	30
(D)	C	B	(A)	MATERIAL NO.	CKT.

REVISED EC NO: J2007-0432 DRWN:KSA T001 2006/08/11 CHKD:THARYAMA 2006/08/21 APPR:NUKITA 2006/08/23 A	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	±0.2	DRAWN BY A. IDA	DATE 2003/05/07	TITLE 2.0 W/B DUAL ROW S/T HEADER WITH EJECT ASSY				
		10 OVER 30 UNDER	±0.25	CHECKED BY J. MIYAZAWA	DATE 2003/05/07					
		30 OVER	±0.3	APPROVED BY Y. ITO	DATE 2003/05/07	MOLEX INCORPORATED				
		ANGULAR ±3 °		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-53314-001		SHEET NO. 1 OF 1		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
		REV		SIZE A3						