


PLUG: WRD 122 PR11 JCL
 RECEPTACLE: WRDDXA 122 S JTB
 XXXXX XX XXX XX

PLUG		RECEPTACLE		XXXXX	XX	XXX
SERIES						
WRD Plug, right angle, without mounting ears		WRDDXA Receptacle, straight, crimp removable, without mounting ears				
• WRDDXA mates with WRD and WRDV connectors. "A" means contacts are included.						
SIZE						
122 Number of contacts		122 Number of contacts				
CONTACTS						
• The use of gaskets is not recommended with crimp socket contacts.						
• WRDDXA** includes full complement of WTK2222 (S or PA) crimp removable contacts packaged with connectors. See "Contacts" in Accessories section to order separately.						
• When using crimp contacts with 20 gage barrel, barrel must be cut off prior to removing contact from connector body.						
TYPE CONTACTS/TERMINATIONS:		TYPE CONTACTS/TERMINATIONS:				
PR7 Pin, right angle, dip solder, .109" x .025" dia		S Socket, straight, crimp removable, 22 AWG				
PR9 Pin, right angle, dip solder, .140" x .025" dia		SA Same as above				
PR11 Pin, right angle, dip solder, .172" x .025" dia		P Pin, straight, crimp removable, 22 AWG				
HARDWARE						
JCL Fixed jackset, cross hole mount		SY Guide set				
SYCL Guide set, cross hole mount		SY-# Guide set, polarized				
SYCL-# Guide set, cross hole mount, polarized		JTA Turning jackset, .200"				
		JTB Hex turning jackset, .200"				
		JTL Long turning jackset, .700"				

OPTIONS	
• Option Codes: Add to the end of the part number. Example: WRDDXA122SSY-C45. Call factory for additional codes.	
-A53	Socket, straight, crimp removable, 20 AWG
-C45	Additional .075" material at termination face for strain relief of crimped wires (22 AWG only). See Detail A below.

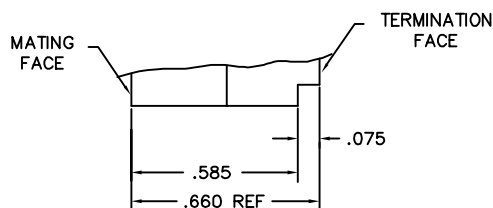

DETAIL A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[AirBorn:](#)

[WRDDXA122SJTB](#)