
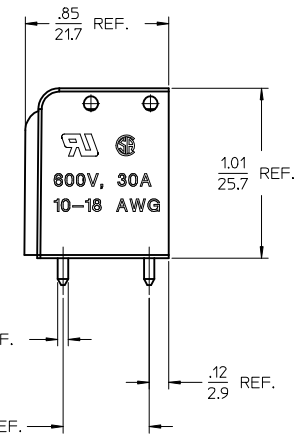
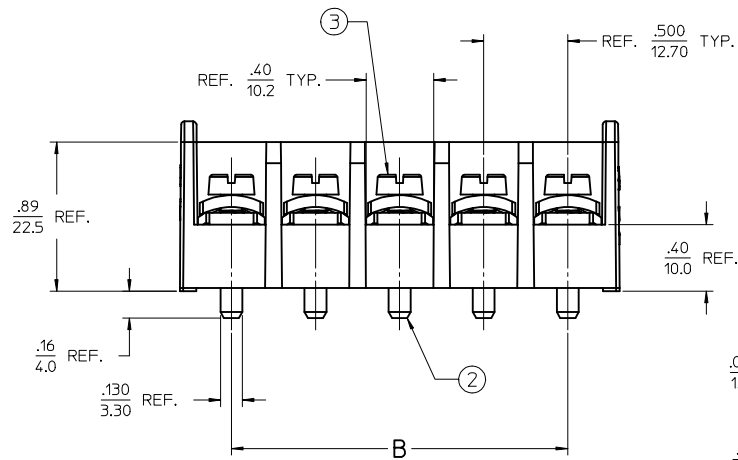

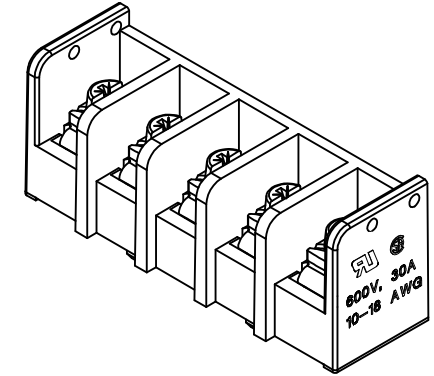
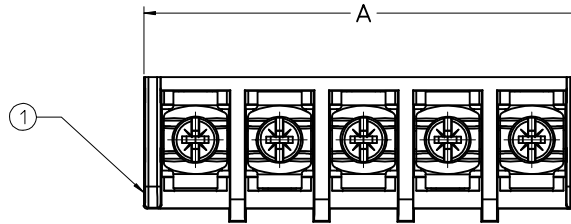


POLES	MATERIAL NO.	ENGINEERING NO.	A		B	
			IN	mm	IN	mm
5	386598001	65505-C-P-88-SPCL-	2.61	66.3	2.00	50.8
8	386598002	65508-C-P-88-SPCL-	4.11	104.4	3.50	88.9
10	386598003	65510-C-P-88-SPCL-	5.11	129.8	4.50	114.3

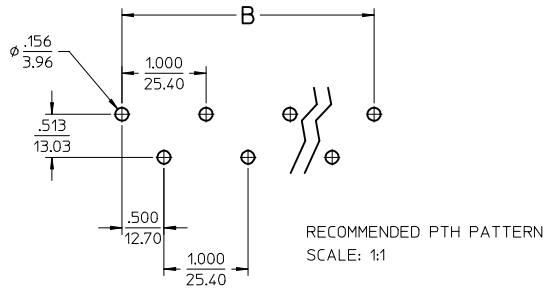

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISH: SEE TABLE
 3. WIRE RANGE: 18-10 AWG
 4. ELECTRICAL SPECS:
VOLTAGE: 600V
CURRENT: 30A
 5. TIGHTENING TORQUE: 16 IN. LBS.
 6. "XX" REFERS TO QUANTITY OF CIRCUITS
 7. PART IS RoHS COMPLIANT

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
3	XX	SCREW & WASHER, M4 X 0.7	STEEL	ZINC/CL CHROMATE
2	XX	TERMINAL, PC SHORT, 600V	BRASS	TIN PLATED
1	1	INSULATOR, SINGLE ROW, BTS	PBT	BLACK

RELEASED		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
REV		DESCRIPTION		mm		INCH		2:1		INCH		1 OF 1	
A		DESCRIPTION		4 PLACES ± .005		3 PLACES ± .005		2 PLACES ± .01		1 PLACE ± .03		0 PLACE ± .05	
A		DESCRIPTION		ANGULAR ± 1°		DRAFT WHERE APPLICABLE		MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-38659-004	
A		DESCRIPTION		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	