


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.




RoHS Compliant ✓

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 3781: CREATED TABULATED LENGTHS	1/6/09	D.FRISIELLO
F	ECN 4740: CN RELEASE	5/13/10	D. CASTRO
G	ECN6237: ADDED CONTACT PLATING NOTE. UPDATED FORMAT.	09/18/12	DFP
H	ECN 6716: CN RELEASE OF SNAP-ON COVER	3/5/13	D.FRISIELLO



PART NUMBER	LENGTH	
	INCHES	MM
ECF504-12AAS	12.0	[304.8]
ECF504-24AAS	24.0	[609.6]
ECF504-36AAS	36.0	[914.4]
ECF504-72AAS	72.0	[1828.8]
ECF504-120AAS	120.0	[3048.0]

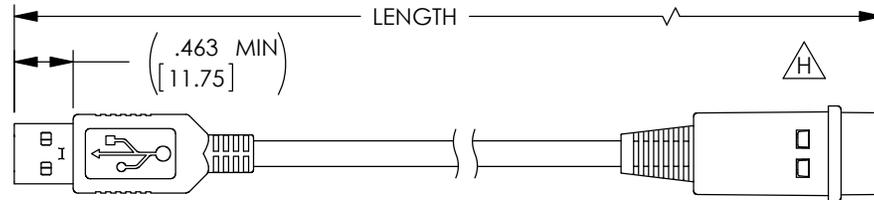


HOUSING: ABS, UL94V-0
FINISH: CHROME.

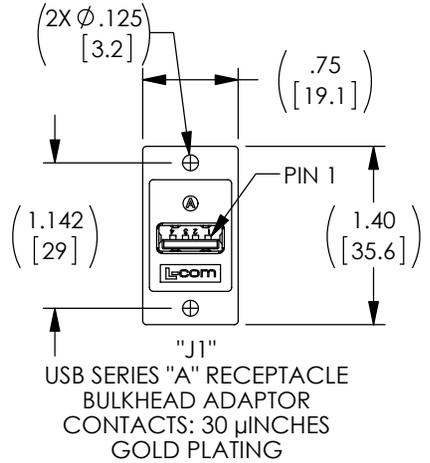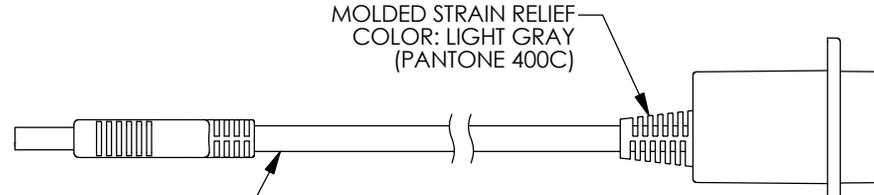

MOLDED PVC HOOD,
COLOR: LIGHT GRAY
(PANTONE 400C)

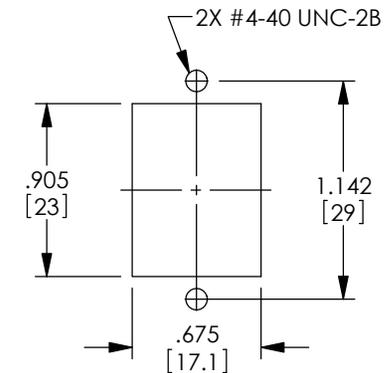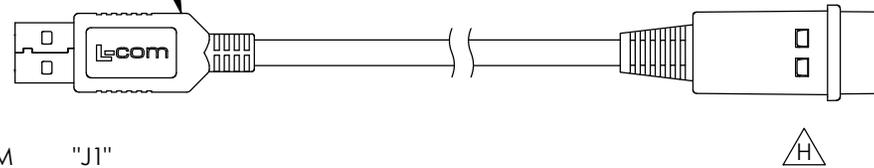

RECOMMENDED
PANEL CUT OUT

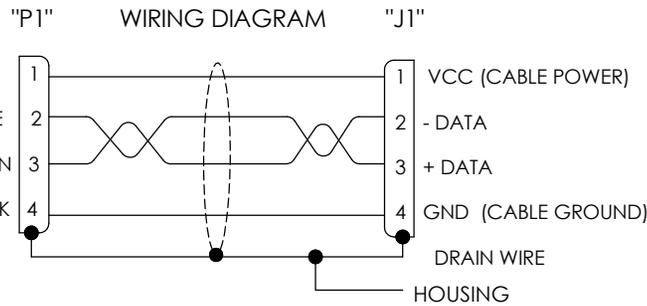

NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE
	DRAWN BY C.MCCORMICK	04/02/2003
	CHECKED BY D.PARHAM	04/02/2003
	APPROVED BY R.CARRICK	04/02/2003
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
PROJECTION 	COLOR VARIATIONS MAY OCCUR	

L-com Global Connectivity 45 BEECHWOOD DRIVE
NORTH ANDOVER, MA 01845

CATEGORY: USB

PRODUCT DESCRIPTION: USB A-F PNL MNT/A-M SHLD

SIZE: A FSCM NO.: 43321 DWG. NO.: ECF504-AAS REV.: H

SCALE: NONE CAD FILE: ECF504-AAS.SLDDRW SHEET 1 OF 1