


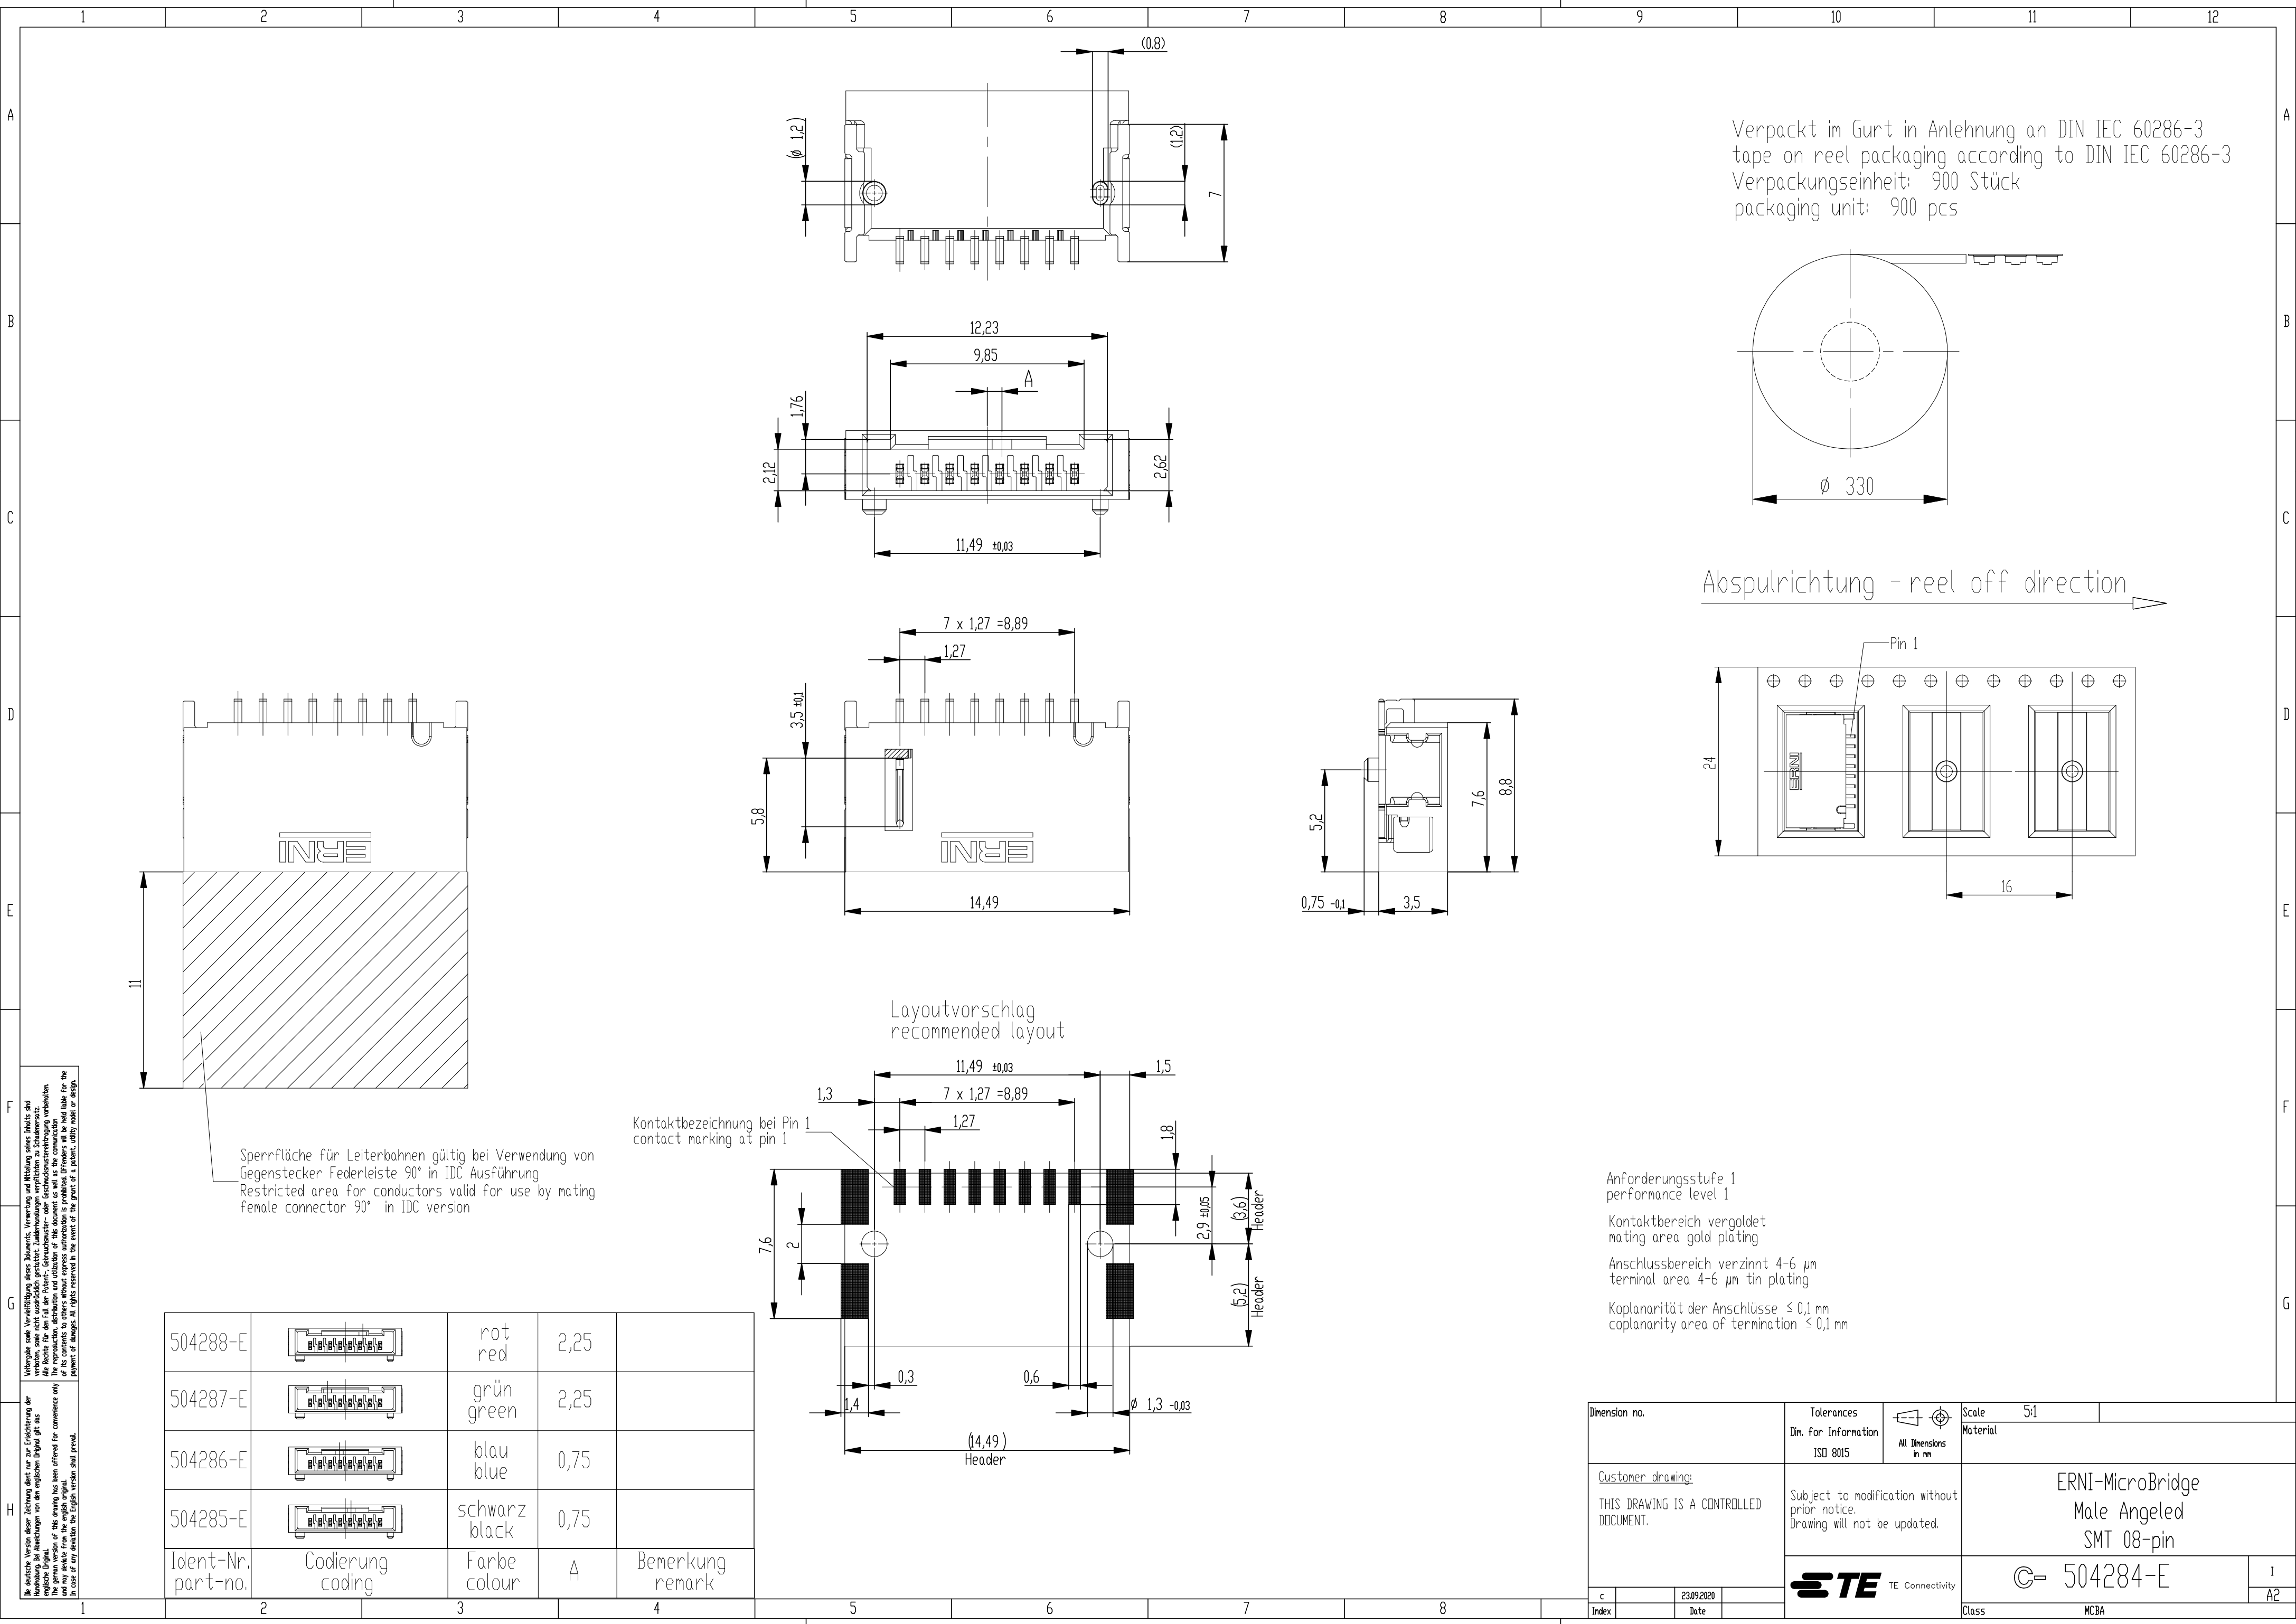
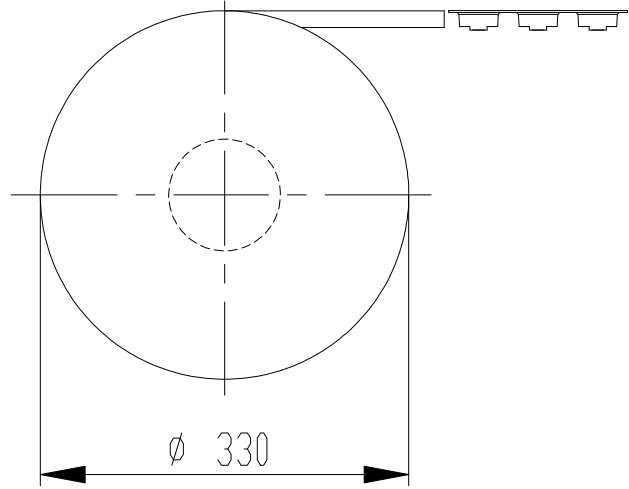
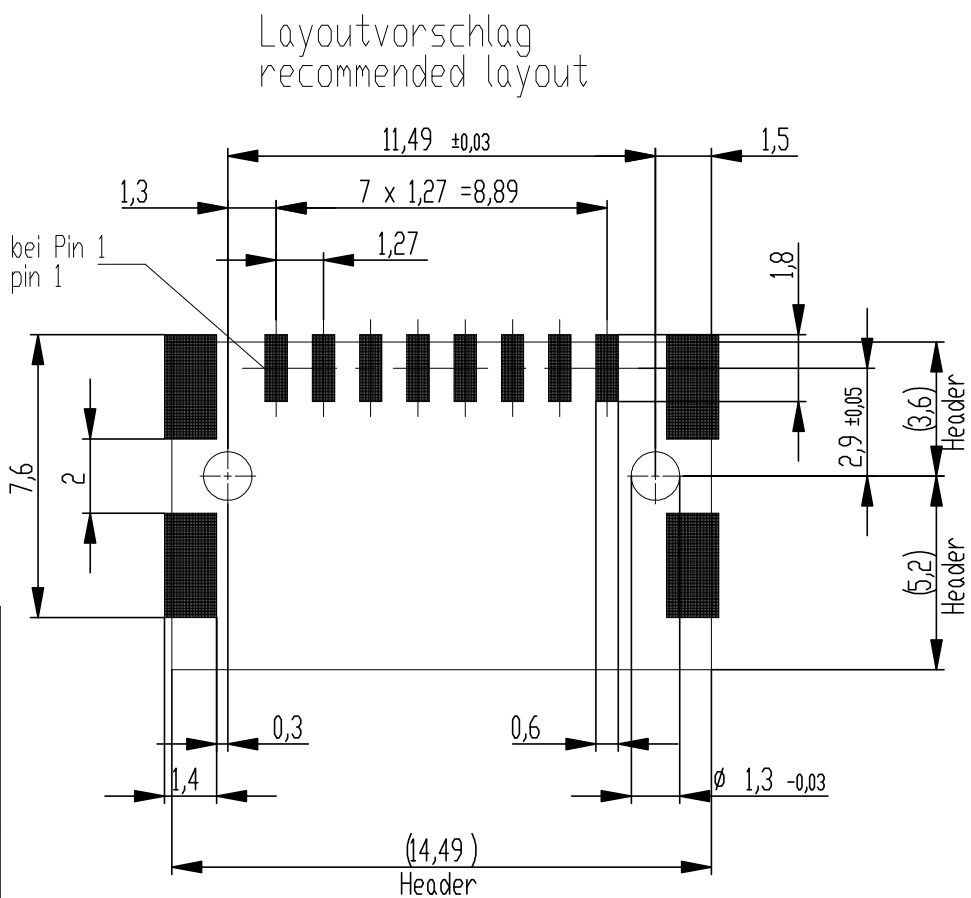
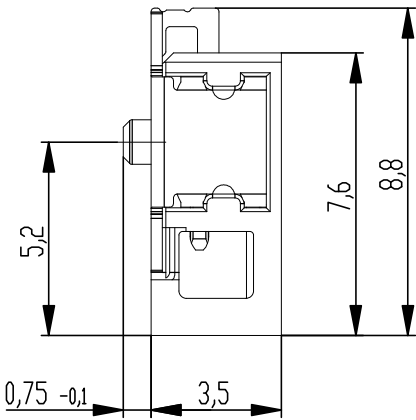
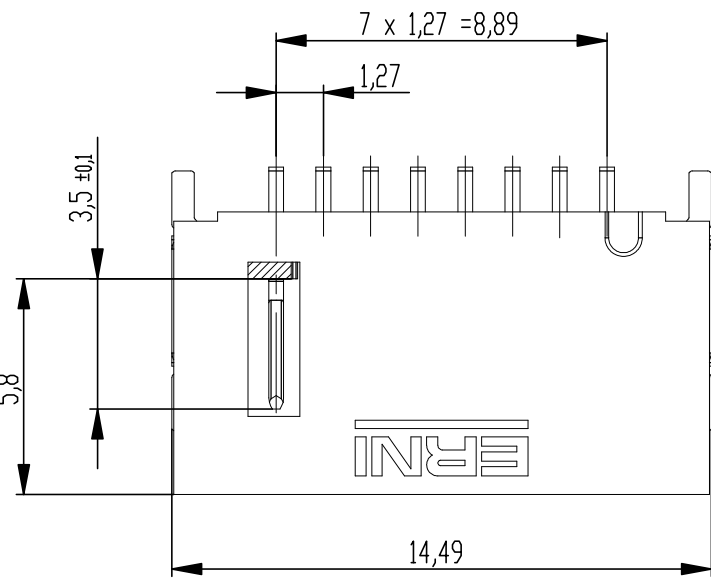


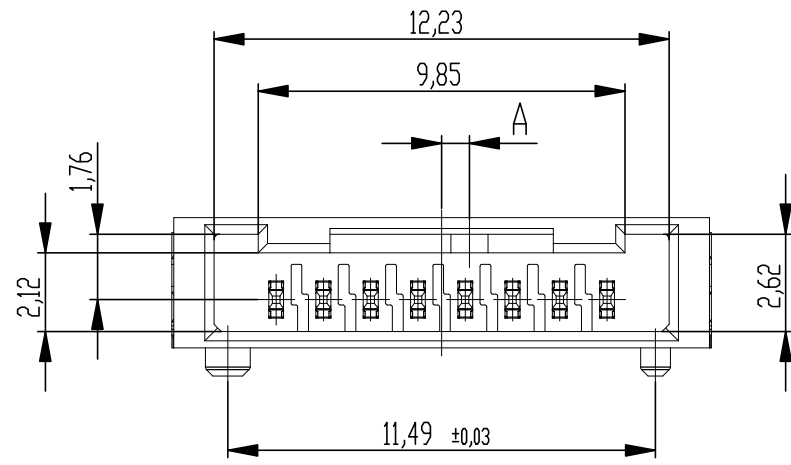

Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
tape on reel packaging according to DIN IEC 60286-3
Verpackungseinheit: 900 Stück
packaging unit: 900 pcs

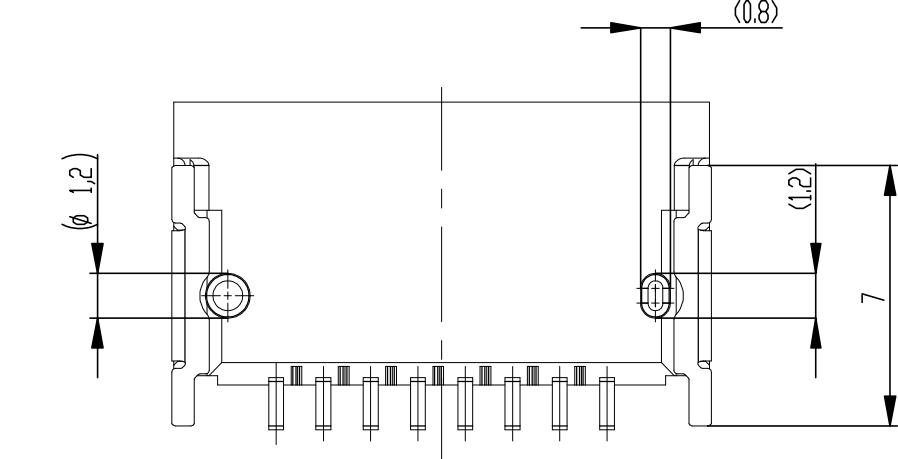

Abspulrichtung - reel off direction

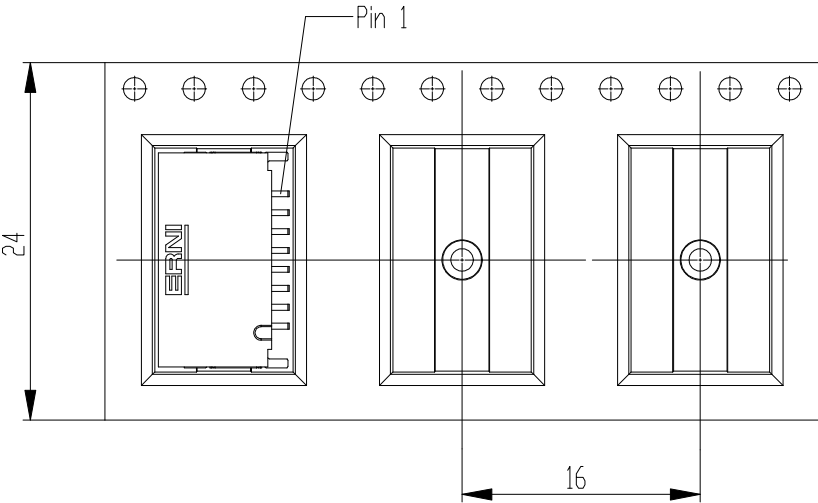

Sperrfläche für Leiterbahnen gültig bei Verwendung von
Gegenstecker Federleiste 90° in IDC Ausführung
Restricted area for conductors valid for use by mating
female connector 90° in IDC version

504288-E		rot red	2,25	
504287-E		grün green	2,25	
504286-E		blau blue	0,75	
504285-E		schwarz black	0,75	
Ident-Nr. part-no.	Codierung coding	Farbe colour	A	Bemerkung remark

Anforderungsstufe 1
performance level 1
Kontaktbereich vergoldet
mating area gold plating
Anschlussbereich verzinkt 4-6 µm
terminal area 4-6 µm tin plating
Koplanarität der Anschlüsse ≤ 0,1 mm
coplanarity area of termination ≤ 0,1 mm

Dimension no.	Tolerances Dim. for Information ISO 8015	Scale Material 5:1	
Customer drawing: THIS DRAWING IS A CONTROLLED DOCUMENT.	Subject to modification without prior notice. Drawing will not be updated.	ERNI-MicroBridge Male Angeled SMT 08-pin © 504284-E	1 A2
c Index	23.09.2020 Date	TE Connectivity	Class MCBA