


MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block

3048124
<https://www.phoenixcontact.com/us/products/3048124>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Feed-through terminal block, Terminal block is supplied without diodes and can even be fitted with components., nom. voltage: 500 V, nominal current: 24 A, 1st and 2nd level, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.2 mm² - 4 mm², mounting: NS 15, NS 35/7,5, NS 35/15, color: gray

Commercial data

Item number	3048124
Packing unit	50 pc
Minimum order quantity	50 pc
Note	Made to order (non-returnable)
Product key	BE1264
GTIN	4017918906573
Weight per piece (including packing)	11.75 g
Weight per piece (excluding packing)	11.75 g
Country of origin	PL

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124

<https://www.phoenixcontact.com/us/products/3048124>

Technical data

Notes

Order information:	Terminal block is supplied without diodes and can even be fitted with components.
--------------------	---

Product properties

Product type	Miniature terminal block
Number of connections	4
Number of rows	2
Potentials	2

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
---------------------	------

Connection data

Number of connections per level	2
Nominal cross section	2.5 mm ²

1st and 2nd level

Screw thread	M3
Tightening torque	0.5 ... 0.6 Nm
Stripping length	7 mm
Internal cylindrical gage	A3
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section rigid	0.2 mm ² ... 4 mm ²
Cross section AWG	24 ... 12 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section, flexible [AWG]	24 ... 14 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm ² ... 2.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm ² ... 2.5 mm ²
Cross-section with insertion bridge, rigid	2.5 mm ²
Cross-section with insertion bridge, flexible	2.5 mm ²
2 conductors with same cross section, solid	0.2 mm ² ... 1 mm ²
2 conductors with same cross section, flexible	0.2 mm ² ... 1.5 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.25 mm ² ... 1.5 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 1.5 mm ²
Nominal current	24 A

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124

<https://www.phoenixcontact.com/us/products/3048124>

Maximum load current	24 A (with 4 mm ² conductor cross section)
Nominal voltage	500 V (Data is based on the dielectric strength of adjacent terminal blocks or of the DINg rail.)
Nominal cross section	2.5 mm ²

Dimensions

Width	5.2 mm
End cover width	2.5 mm

Material specifications

Color	gray
Flammability rating according to UL 94	V2
Insulating material group	I
Insulating material	PA

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting

Mounting type	NS 15
	NS 35/7,5
	NS 35/15

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block




3048124


<https://www.phoenixcontact.com/us/products/3048124>

Drawings

Circuit diagram

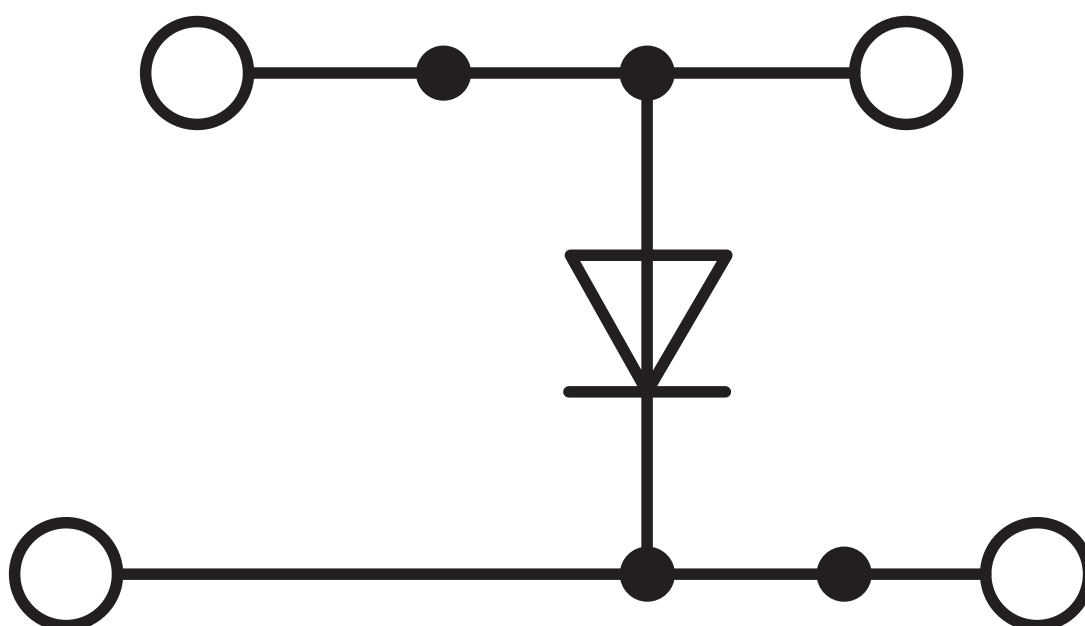

Circuit diagram

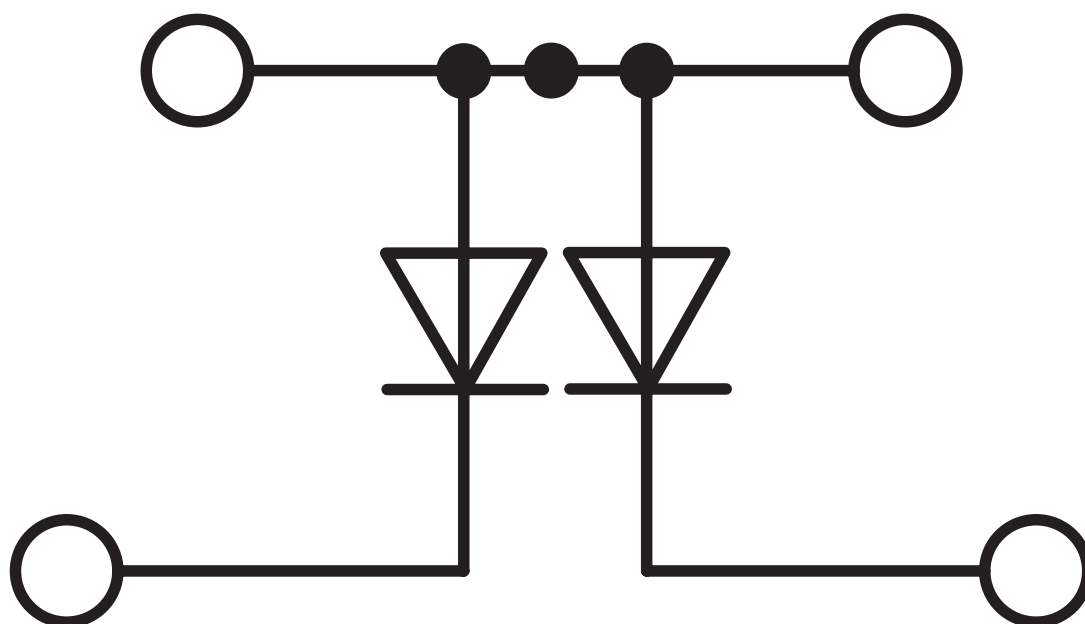


MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block

3048124

<https://www.phoenixcontact.com/us/products/3048124>

Circuit diagram

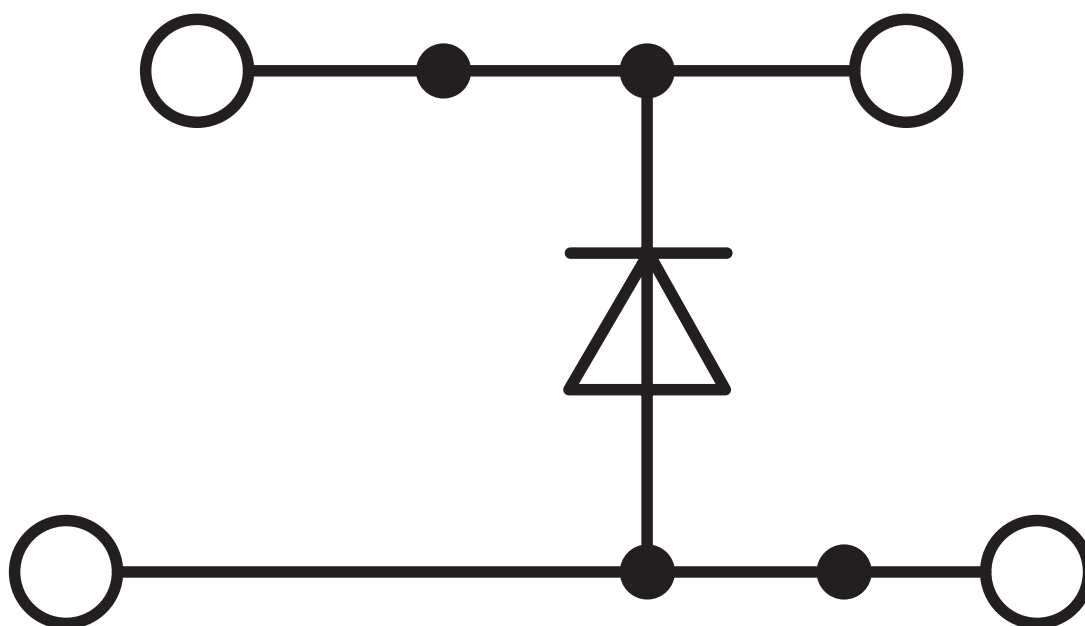

3048124
<https://www.phoenixcontact.com/us/products/3048124>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124

<https://www.phoenixcontact.com/us/products/3048124>

Accessories



Note: Applying some accessories below might limit this product.

FBRNI 2-5 N - Fixed bridge

3000175

<https://www.phoenixcontact.com/us/products/3000175>



Fixed bridge, pitch: 5 mm, number of positions: 2, color: silver




Max. current carrying capacity: 22 A

FBRNI 3-5 N - Fixed bridge

3000162

<https://www.phoenixcontact.com/us/products/3000162>



Fixed bridge, pitch: 5 mm, number of positions: 3, color: silver



Max. current carrying capacity: 22 A

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block




3048124

<https://www.phoenixcontact.com/us/products/3048124>

FBRNI 4-5 N - Fixed bridge

3000159

<https://www.phoenixcontact.com/us/products/3000159>



Fixed bridge, pitch: 5 mm, number of positions: 4, color: silver

 Max. current carrying capacity: 22 A

FBRNI 10-5 N - Fixed bridge

2770639

<https://www.phoenixcontact.com/us/products/2770639>



Fixed bridge, pitch: 5.2 mm, number of positions: 10, color: silver

 Max. current carrying capacity: 22 A

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124

<https://www.phoenixcontact.com/us/products/3048124>

DP-MBKKB 2,5 - Spacer plate

1413065

<https://www.phoenixcontact.com/us/products/1413065>



Spacer plate, width: 2.5 mm, height: 62 mm, color: gray

D-MBKKB 2,5 - End cover

1413052

<https://www.phoenixcontact.com/us/products/1413052>



End cover, depth: 40 mm, width: 5 mm, height: 62 mm, color: gray

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124

<https://www.phoenixcontact.com/us/products/3048124>

SBS 5:UNBEDRUCKT - Marker card

1007219

<https://www.phoenixcontact.com/us/products/1007219>



Marker card, Card, white, unlabeled, can be labeled with: Marker pen, perforated, mounting type: snap into tall marker groove, snap into flat marker groove, for terminal block width: 5 mm, lettering field size: 6 x 5.1 mm, Number of individual labels: 250

SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/us/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124

<https://www.phoenixcontact.com/us/products/3048124>

NS 15 UNPERF 2000MM VPE 10 - DIN rail, unperforated

1401695

<https://www.phoenixcontact.com/us/products/1401695>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 15 PERF 2000MM VPE 10 - DIN rail perforated

1401682

<https://www.phoenixcontact.com/us/products/1401682>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124

<https://www.phoenixcontact.com/us/products/3048124>

NS 15 AL PERF 2000MM VPE 10 - DIN rail perforated

1401763

<https://www.phoenixcontact.com/us/products/1401763>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 15 WH PERF 2000MM-VPE 10 - DIN rail perforated

1204096

<https://www.phoenixcontact.com/us/products/1204096>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124

<https://www.phoenixcontact.com/us/products/3048124>

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124

<https://www.phoenixcontact.com/us/products/3048124>

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124

<https://www.phoenixcontact.com/us/products/3048124>

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124

<https://www.phoenixcontact.com/us/products/3048124>

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124

<https://www.phoenixcontact.com/us/products/3048124>

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124

<https://www.phoenixcontact.com/us/products/3048124>

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124

<https://www.phoenixcontact.com/us/products/3048124>

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124

<https://www.phoenixcontact.com/us/products/3048124>

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124

<https://www.phoenixcontact.com/us/products/3048124>

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124

<https://www.phoenixcontact.com/us/products/3048124>

NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

ZB 5 :UNBEDRUCKT - Zack marker strip

1050004

<https://www.phoenixcontact.com/us/products/1050004>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.1 x 10.5 mm, Number of individual labels: 10

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124

<https://www.phoenixcontact.com/us/products/3048124>

ZB 5 CUS - Zack marker strip

0824962

<https://www.phoenixcontact.com/us/products/0824962>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

ZB 5,LGS:FORTL.ZAHLEN - Zack marker strip

1050017

<https://www.phoenixcontact.com/us/products/1050017>



Zack marker strip, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124

<https://www.phoenixcontact.com/us/products/3048124>

ZB 5,QR:FORTL.ZAHLEN - Zack marker strip

1050020

<https://www.phoenixcontact.com/us/products/1050020>



Zack marker strip, white, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm

ZB 5,LGS:GLEICHE ZAHLEN - Zack marker strip

1050033

<https://www.phoenixcontact.com/us/products/1050033>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block




3048124

<https://www.phoenixcontact.com/us/products/3048124>

ZB 5,LGS:L1-N,PE - Zack marker strip

1050415

<https://www.phoenixcontact.com/us/products/1050415>



Zack marker strip, Strip, white, labeled, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

UC-TM 5 - Marker for terminal blocks

0818108

<https://www.phoenixcontact.com/us/products/0818108>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 96

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124

<https://www.phoenixcontact.com/us/products/3048124>

UC-TM 5 CUS - Marker for terminal blocks

0824581

<https://www.phoenixcontact.com/us/products/0824581>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 10.5 x 4.6 mm, Number of individual labels: 96

UCT-TM 5 - Marker for terminal blocks

0828734

<https://www.phoenixcontact.com/us/products/0828734>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 72

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124

<https://www.phoenixcontact.com/us/products/3048124>

UCT-TM 5 CUS - Marker for terminal blocks

0829595

<https://www.phoenixcontact.com/us/products/0829595>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 72

GBS 5-25X12 - Group marker label for terminal marking

0810588

<https://www.phoenixcontact.com/us/products/0810588>



Group marker label, snaps onto terminal center for screw, spring-cage and quick connection terminal blocks, labeled with a 25 x 12 mm label or manually with the B-STIFT, in the foot part with ZB 5

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124

<https://www.phoenixcontact.com/us/products/3048124>

GBS 5-25X5 - Group marker label for terminal marking

0829126

<https://www.phoenixcontact.com/us/products/0829126>



Group marking label, can be snapped into terminal center for screw, spring-cage, push-in, and fast connection terminal blocks, can be labeled with a 24 x 4 mm label or manually using B-STIFT, in the foot part with ZB 5

STP 5-2-ZB - Marker carriers

3037643

<https://www.phoenixcontact.com/us/products/3037643>



Marker carriers, snaps into ST 2,5 spring-cage terminal blocks, can be marked with UC-TM 5, UC-TMF 5, UCT-TM 5, UCT-TMF 5, ZB 5, or ZBF 5, gray, unlabeled, mounting type: snapped

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124

<https://www.phoenixcontact.com/us/products/3048124>

CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/us/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/us/products/3022276>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124


<https://www.phoenixcontact.com/us/products/3048124>

E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/us/products/0800886>

End clamp, width: 9.5 mm, color: gray




E/MBK - End bracket

1401637

<https://www.phoenixcontact.com/us/products/1401637>

End clamp, width: 6.2 mm, color: gray



MBKKB 2,5-2 M.DIODENBOHRUNG - Feed-through terminal block



3048124


<https://www.phoenixcontact.com/us/products/3048124>

E/MK 1 - End bracket

1421659

<https://www.phoenixcontact.com/us/products/1421659>

End clamp width: 6 mm, color: gray



Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com