

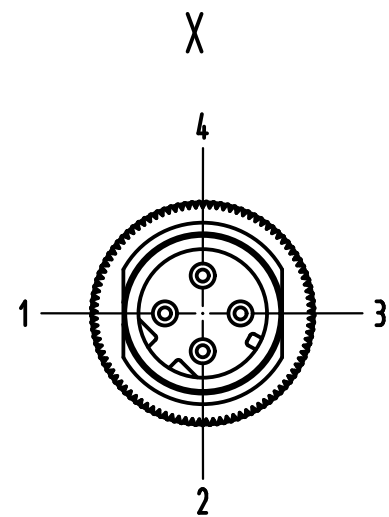
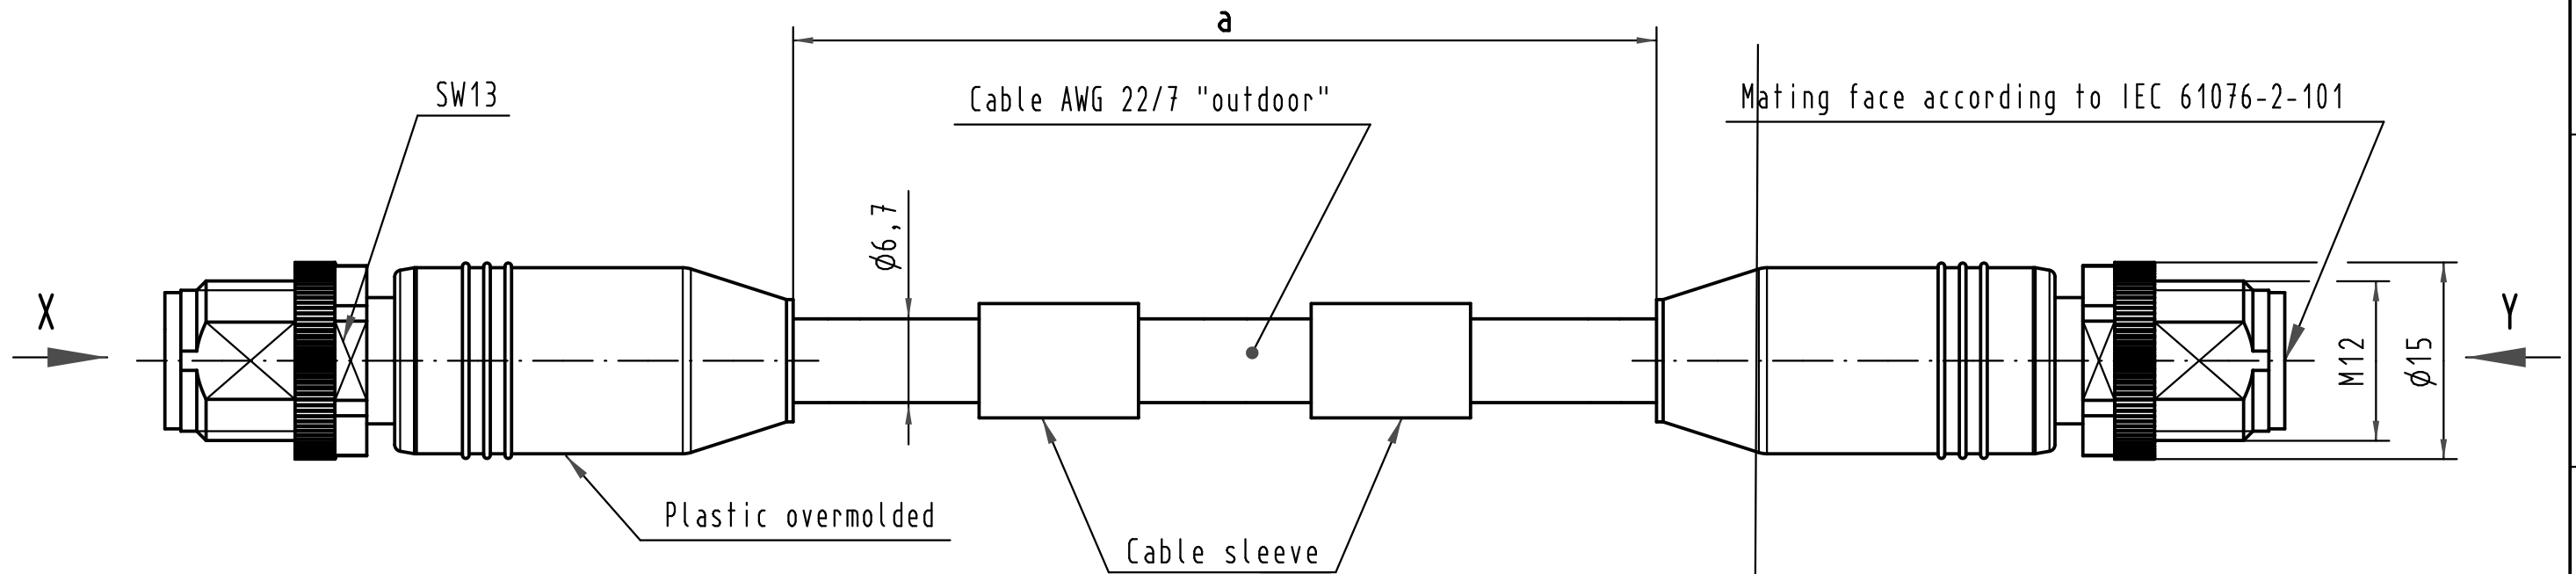
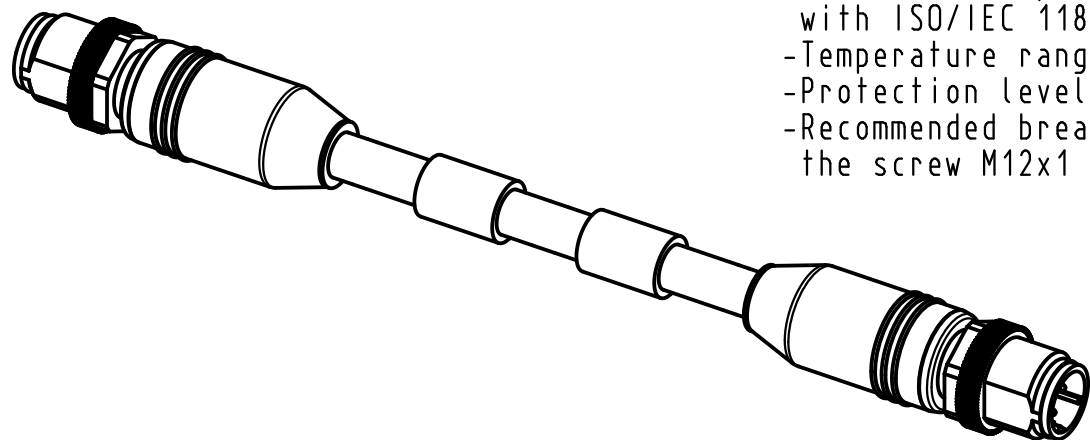


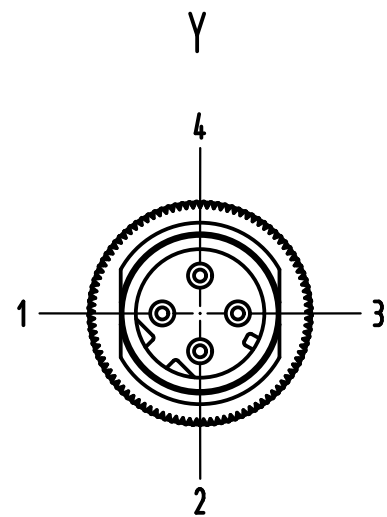

Loading-Plan:

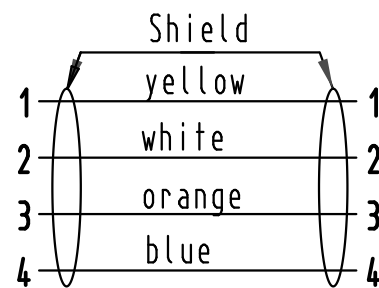

- Transmission properties in accordance with ISO/IEC 11801:2002: Class D
- Temperature range: -20°C ...+60°C
- Protection level: IP67
- Recommended breakaway torque for the screw M12x1 - 0,6Nm

09 47 22 22 023	AWG 22/7 outdoor PVC	25 m
09 47 22 22 022	AWG 22/7 outdoor PVC	7,5 m
09 47 22 22 015	AWG 22/7 outdoor PVC	40 m
09 47 22 22 013	AWG 22/7 outdoor PVC	20 m
09 47 22 22 012	AWG 22/7 outdoor PVC	15 m
09 47 22 22 011	AWG 22/7 outdoor PVC	10 m
09 47 22 22 006	AWG 22/7 outdoor PVC	5 m
09 L		

Cont. no.	Part-No.	Type of cable	Dim. a[m]
-----------	----------	---------------	-----------

			All Dimensions in mm Original Size/DIN A 3			Techn. Character.			Nicht tolerierte Maßel/Free size tolerances							
							Dat.	Name	Maßstab/Scale 2:1	M12 cord, 2xM12 overmolded, D-coded 4xAWG 22/7, CAT5						
						Detail.	06.08.08	MS								
						Insp.	06.08.08	RA								
						Stand.										
DRS 475A			03.03.09			MR			HARTING Electronics GmbH & Co. KG			TB 09 47 22 22 xxx			Blatt/ page	
35009									D-32339 ESPELKAMP							
Mod.			Dat.			Name						Sub.			Sub	