


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		产品尺寸变更，图面升级整理图面	2025.05.29	阿树



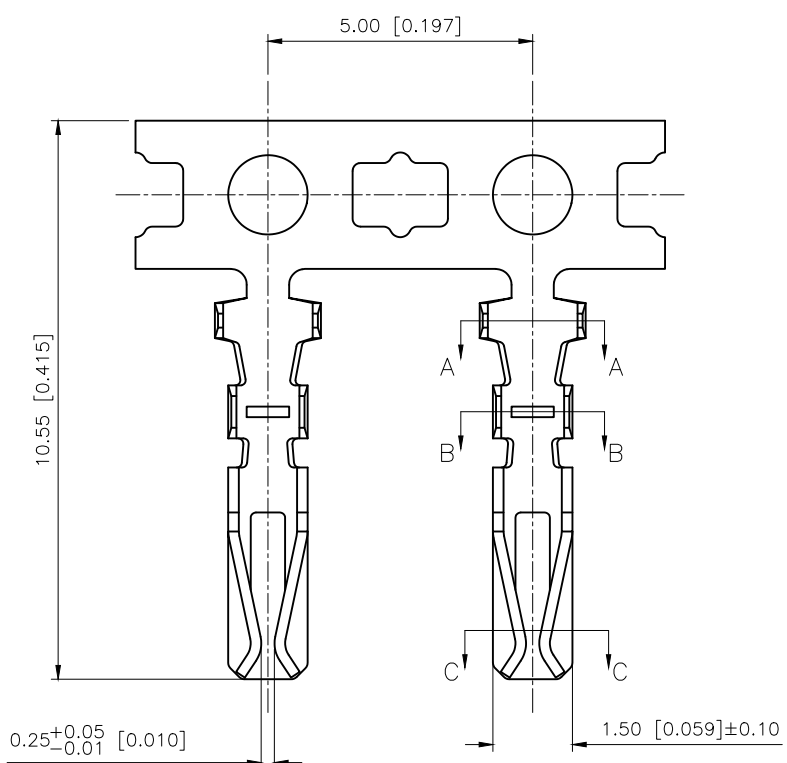


- NOTES:
1. Material: Phosphor Bronze, C5191H,T=0.20mm
 2. Finish: Nickel 20u"~60u"Over All.
T-Tin 80u"~120u"Over Nickel
 3. Applicable Wire Range: AWG#22~#28
 4. Insulation O.D.: 1.50mm(Max.)
 5. Current Rating: 3A AC,DC
 6. Voltage Rating: 250V AC,DC
 7. Temperature Rang: -25°C~+85°C
 8. Contact Resistance: 20mΩ Max
 9. Insulation Resistance: 1000MQ Min
 - 10.Withstanding Voltage: 1000V AC/minute
 - 11.Insert Force: 1.00kgf (Max.)
 - 12.Withdrawal Force: 2.00kgf(Min)

PART NO.:

X2026 I-P XX X-D
① ② ③ ④ ⑤ ⑥

- ①Series No
②Category:T-Terminal
③Material:P-Phosphorous bronze
④Finish:SN-Tin-plated ; V01-Gold 1u"
⑤Plating method:Blank-Stamping before plating
B-Plating before stamping
⑥Mold NO./Mark/Special NO:D-With Lock

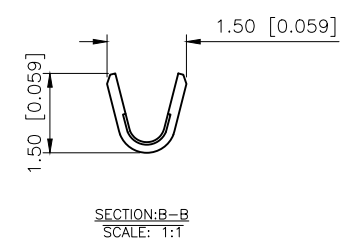

X2026T-PSN-D	Phosphor Bronze	Tin-plated	AWG28#~22#	X2026H-D
X2026T-PV01-D		Gold 1u"		
PART NO	Material	Finish	Wire Range	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 2.0mm Crimp Style Connector
CHECKED		UNIT:	mm/in	PART NO.: X2026T-PXXX-D
APPROVED		SIZE:	A4	DWG NO.: