
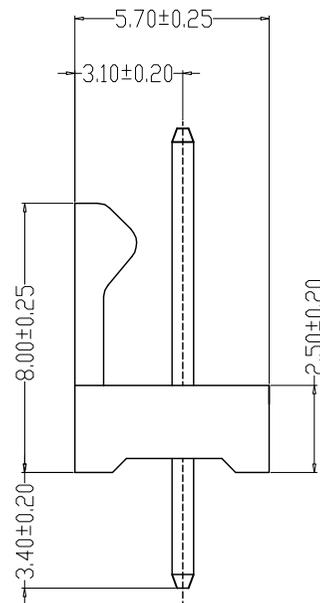




环保物料

TEL:0769-82001899

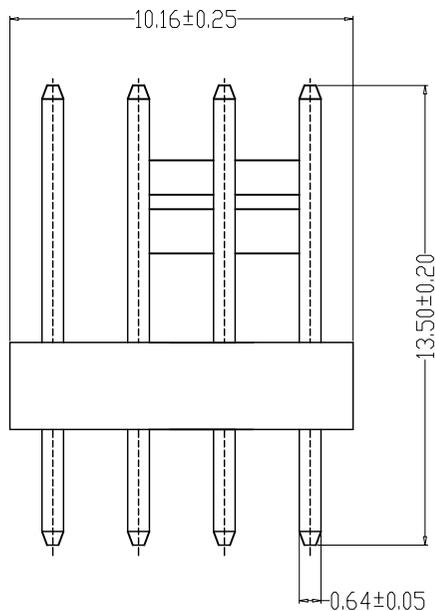

SPECIFICATIONS

- 1、Current Rating: 4A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25°C~+85°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material:Wafer PA66, UL94V-0  
PIN Brass Tin-plated

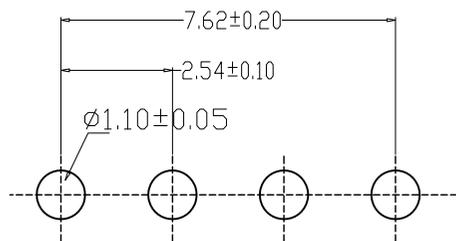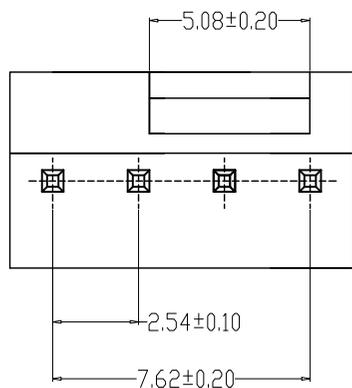

PCB LAYOUT

				TOLERANCE UNLESS OTHERWISE	DRAWN	CK tan	<b>XFCN</b> 兴飞连接器有限公司 XFCN CONNECTORS CO.,LTD.	SHEET	1/1
				X. ±0.30 X° ±5°	CHKD			DATE	2020.04.12
				.X ±0.20 .X° ±2°	APPD			UNITS	mm
				.XX ±0.08 .XX° ±1°	VIEW	⊕		SCALE	1:1
AO	MODIFICATION			DRAW	DATE	.XXX ±0.03 .XXX° ±0.5°	PRODUCT NAME	2.54mm Crimp Style Connectors	
VER							PART. NO.	M2510V-04P-N3	
1	2	3	4	5	6	7	8	9	10
								DWG. NO.	009