


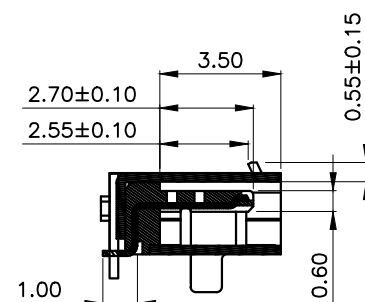
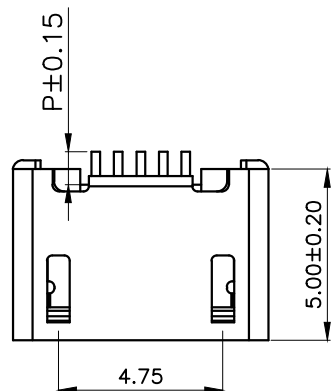


RoHS

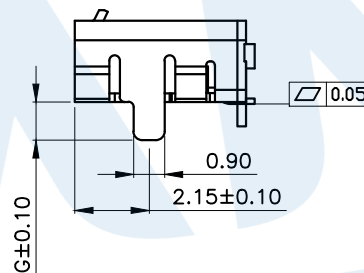

Pin length	
CODE	P
P1	0.80
P2	1.00
P3	1.25



Shell foot length	
CODE	G
G2	1.10
G5	1.80

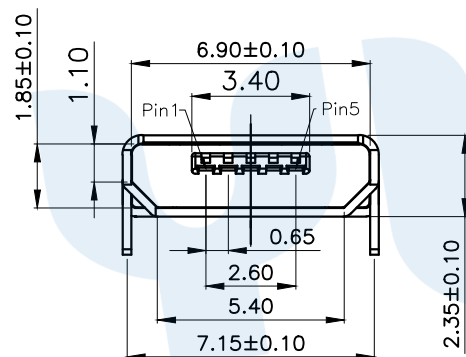

规格说明:Specifications

电气特性:Electrical

1. 额定电流:Current Rating
1.0A/contact terminal
 2. 额定电压:Voltage Rating
30V DC
 3. 接触阻抗:Contact Resistance
50 milliohms Max
 4. 耐电压:Dielectric Withstanding Voitage
AC 100V/1MINUTE.
 5. 绝缘阻抗:Insulation Resistance
100MEGA Ohms Min
- 物理性能:Mechanical
1. 插拔力:Cnnector Mate and Unmate Force
Insertion force:3.57kgf(MAX)
Extraction force:1.02kgf(Min).0.81~2.05kgf(Min).
- 端子保持力:Terminal Retention
0.5kaf(MIN)

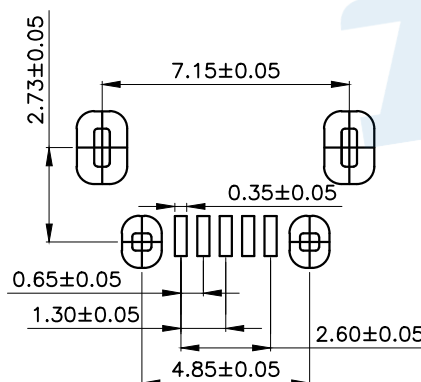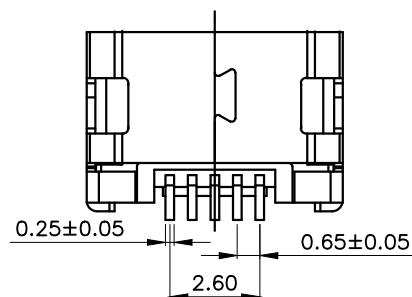

Recommended P.C.B Layout

③	Terminal		5	Brass	Au Plating
②	Shee		1	Brass	Tin Plating
①	Base		1	LCP	Black
NO.	Name	Number	Qty	Material	Remarks

YUANDI® Yuandi Electronics Co,Ltd

design	date		name	USB CONNECTOR
Review	date			
Approved	date		model	MICRO USB C to B Adapter

			~ 5	±0.10	Drawing number:					model	MICRO-10-G□P□-A212	
modify	Review	Approved	Tolerance not specified		Proportion	1:1	unit	mm	gape number		A4	