



FEATURES

- Low forward voltage drop
- High frequency operation
- 175°C Operating Junction Temperature
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS

- Typical applications are in high current switching power supplies, plating power supplies, UPS systems, converters, free-wheeling diodes, welding, and reverse battery protection.



ABSOLUTE MAXIMUM RATINGS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_R	Repetitive Peak Reverse Voltage	$I_R=100\mu A$	60	V
$I_{F(AV)}$	Average Forward Current	$T_C=140^\circ C$	200	A
I_{FSM}	Surge Forward Current	Surge applied at rated load conditions halfwave, single phase, 60 Hz	1500	A
dv/dt	Voltage Rate of Change		10000	V/us
T_J	Junction Temperature		-55~175	$^\circ C$
T_{stg}	Storage Temperature Range		-55~150	$^\circ C$


THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance, Junction to Case	0.6	$^\circ C/W$

ELECTRICAL CHARACTERISTICS (Pulse Test: Pulse Width = 300 μ s, Duty Cycle 2.0%.)

SYMBOL	PARAMETER	CONDITIONS	MAX	UNIT
V _F	Forward Voltage drop	I _F = 200A, T _J = 25°C	0.91	V
		I _F = 200A, T _J = 125°C	0.8	
I _R	Instantaneous Reverse Current	V _R =V _{RRM} , T _J = 25°C	0.5	mA
		V _R =V _{RRM} , T _J =125°C	50	

PACKAGE OUTLINE

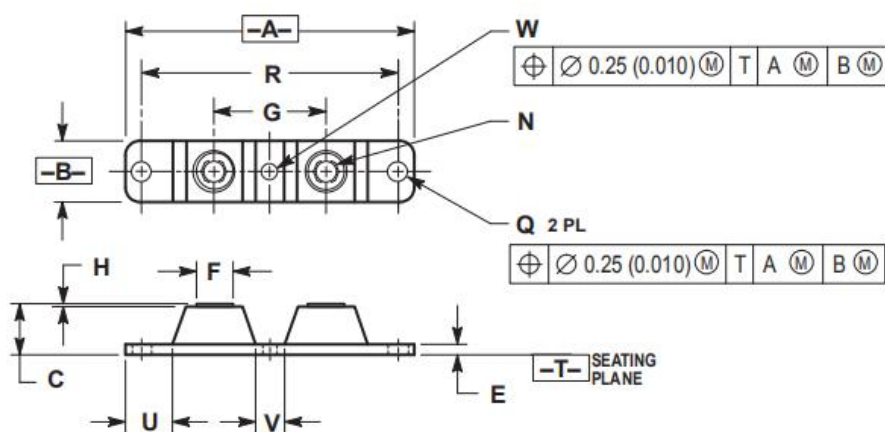

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	3.450	3.635	87.63	92.33
B	0.700	0.810	17.78	20.57
C	0.615	0.640	15.53	16.26
E	0.120	0.130	3.05	3.30
F	0.435	0.445	11.05	11.30
G	1.370	1.380	34.80	35.05
H	0.007	0.030	0.18	0.76
N	1/4-20UNC-2B		1/4-20UNC-2B	
Q	0.270	0.285	6.86	7.32
R	31.50 BSC		80.01 BSC	
U	0.600	0.630	15.24	16.00
V	0.330	0.375	8.39	9.52
W	0.170	0.190	4.32	4.82

NOTICE:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.

