

isc Silicon NPN Darlington Power Transistor

2SD2276

DESCRIPTION



- Collector-Emitter Breakdown Voltage-
: $V_{(BR)CEO} = 140V(\text{Min})$
- High DC Current Gain-
: $h_{FE} = 5000(\text{Min.}) @ (I_C = 7A, V_{CE} = 5V)$
- Low Collector Saturation Voltage-
: $V_{CE(sat)} = 2.5V(\text{Max}) @ (I_C = 7A, I_B = 7mA)$
- Complement to Type 2SB1503
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS

- Designed for power amplification.

ABSOLUTE MAXIMUM RATINGS($T_a = 25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	160	V
V_{CEO}	Collector-Emitter Voltage	140	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current-Continuous	8	A
I_{CM}	Collector Current-Peak	15	A
P_C	Collector Power Dissipation @ $T_a = 25^\circ\text{C}$	3.5	W
	Collector Power Dissipation @ $T_c = 25^\circ\text{C}$	120	
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature	-55~150	$^\circ\text{C}$

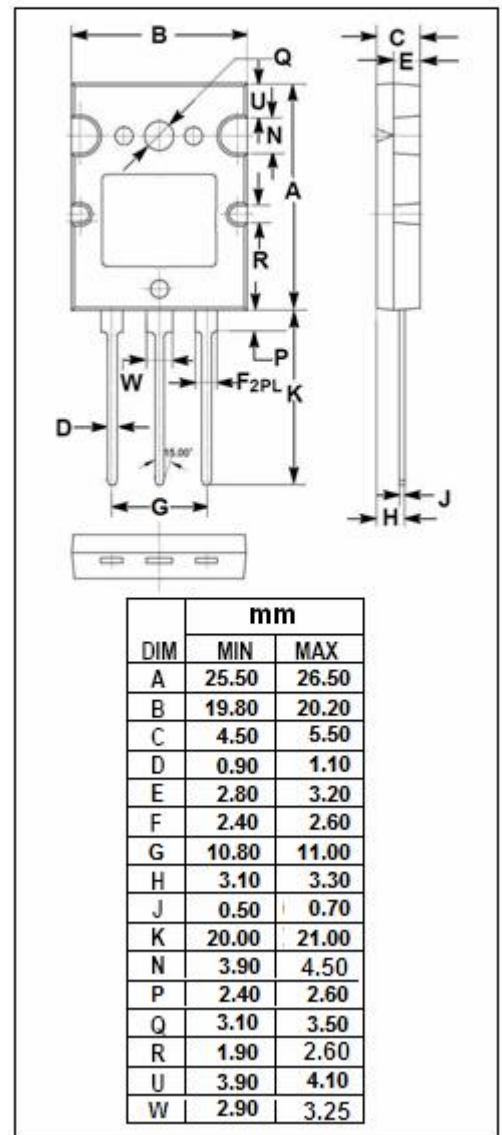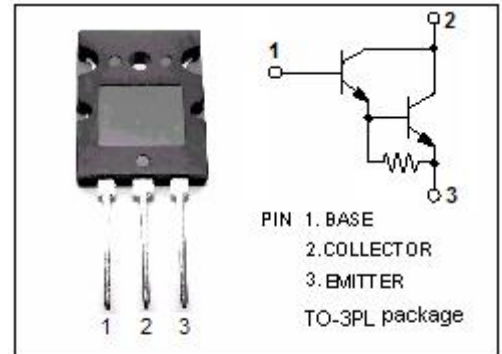

isc Silicon NPN Darlington Power Transistor**2SD2276****ELECTRICAL CHARACTERISTICS****T_j=25°C unless otherwise specified**

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage	I _C = 30mA; I _B = 0	140			V
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C = 7A; I _B = 7mA			2.5	V
V _{BE(sat)}	Base-Emitter Saturation Voltage	I _C = 7A; I _B = 7mA			3.0	V
I _{CBO}	Collector Cutoff Current	V _{CB} = 160V; I _E = 0			100	μ A
I _{CEO}	Collector Cutoff Current	V _{CE} = 140V; I _B = 0			100	μ A
I _{EBO}	Emitter Cutoff Current	V _{EB} = 5V; I _C = 0			100	μ A
h _{FE-1}	DC Current Gain	I _C = 1A; V _{CE} = 5V	2000			
h _{FE-2}	DC Current Gain	I _C = 7A; V _{CE} = 5V	5000		30000	
f _T	Current-Gain—Bandwidth Product	I _C = 0.5A; V _{CE} = 10V		20		MHz

◆ h_{FE-2} Classifications

Q	S	P
5000-15000	7000-21000	8000-30000

Notice:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaim