

Schottky Rectifier**MBRD10200CT****FEATURES**

- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Low forward voltage drop
- 100% tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS



- Switching power supply
- Converters
- Free-Wheeling diodes

ABSOLUTE MAXIMUM RATINGS(Ta=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V _{RRM} V _{RMS} V _R	Peak Repetitive Reverse Voltage RMS Voltage DC Blocking Voltage	200	V
I _{F(AV)}	Average Rectified Forward Current	10	A
I _{FSM}	Nonrepetitive Peak Surge Current 8.3ms single half sine-wave superimposed on rated load conditions	128	A
T _J	Junction Temperature	-55~150	°C
T _{stg}	Storage Temperature Range	-55~150	°C

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R _{th j-c}	Thermal Resistance, Junction to Case	2	°C/W

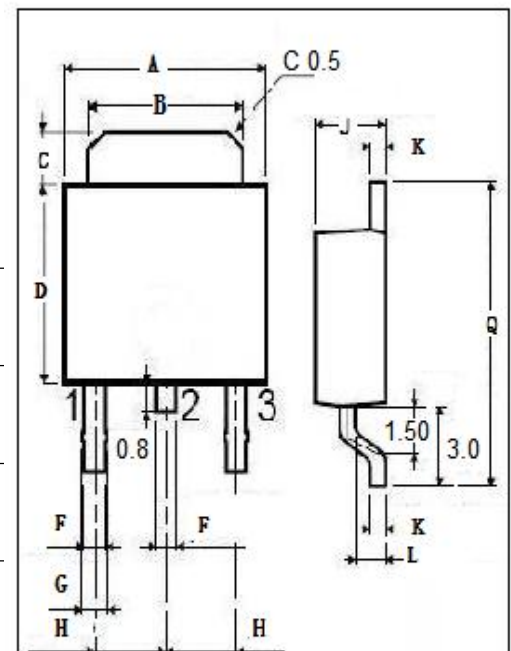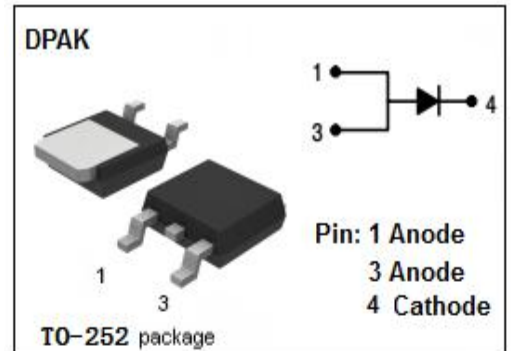

DIM	mm	
	MIN	MAX
A	6.40	6.60
B	5.20	5.40
C	1.15	1.35
D	5.70	6.10
F	0.65	
G	0.75	
H	2.10	2.50
J	2.10	2.40
K	0.40	0.60
L	0.90	1.10
Q	9.90	10.1

Schottky Rectifier

MBRD10200CT

ELECTRICAL CHARACTERISTICS

SYMBOL	PARAMETER			CONDITIONS	TYP	MAX	UNIT
V_F	Maximum Voltage	Instantaneous	Forward	$I_F=5A ; T_j=125^{\circ}C$		0.74	V
				$I_F=5A ; T_j= 25^{\circ}C$		0.9	
I_R	Maximum Current	Instantaneous	Reverse	$V_R= V_{RWM}; T_j= 25^{\circ}C$		1	mA
				$V_R= V_{RWM}; T_j= 125^{\circ}C$		25	mA

NOTICE:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.