


## FEATURES

- With TO-220AB insulated package
- Suitable for general purpose AC switching . which can be used as an ON/OFF function in applications such as static relays, heating regulation, Induction motor starting circuits or for phase control in light dimmers, motor speed controllers etc.

## ABSOLUTE MAXIMUM RATINGS(Ta=25°C)

SYMBOL	PARAMETER	MIN	UNIT
$V_{DRM}$	Repetitive peak off-state voltage	600	V
$V_{RRM}$	Repetitive peak reverse voltage	600	V
$I_{T(RMS)}$	RMS on-state current (full sine wave) $T_j=105^{\circ}\text{C}$	8	A
$I_{TSM}$	Non-repetitive peak on-state current $t_p=20\text{ms}$	80	A
$T_j$	Operating junction temperature	110	$^{\circ}\text{C}$
$T_{stg}$	Storage temperature	-45~150	$^{\circ}\text{C}$
$R_{th(j-c)}$	Thermal resistance, junction to case	2.5	$^{\circ}\text{C}/\text{W}$
$R_{th(j-a)}$	Thermal resistance, junction to ambient	60	$^{\circ}\text{C}/\text{W}$

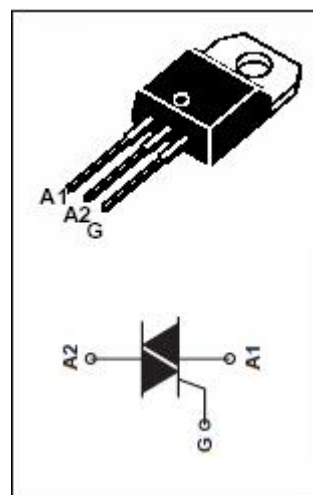

## ELECTRICAL CHARACTERISTICS (Tc=25°C unless otherwise specified)

SYMBOL	PARAMETER		CONDITIONS	MAX	UNIT
$I_{RRM}$	Repetitive peak reverse current		$V_R=V_{RRM}$ , $V_R=V_{RRM}$ , $T_j=110^{\circ}\text{C}$	0.01 0.5	mA
$I_{DRM}$	Repetitive peak off-state current		$V_D=V_{DRM}$ , $V_D=V_{DRM}$ , $T_j=110^{\circ}\text{C}$	0.01 0.5	mA
$I_{GT}$	Gate trigger current	I - II -III	$V_D=12\text{V}$ ; $R_L=30\ \Omega$	5	mA
$I_H$	Holding current		$I_{GT}=0.1\text{A}$ , Gate Open	10	mA
$V_{GT}$	Gate trigger voltage	I - II -III	$V_D=12\text{V}$ ; $R_L=30\ \Omega$	1.3	V
$V_{TM}$	On-state voltage		$I_T=11\text{A}$ ; $t_p=380\ \mu\text{s}$	1.55	V