

DESCRIPTION

- Collector–Emitter Sustaining Voltage–
: $V_{CEO(SUS)} = 100\text{ V}(\text{Min})$
- DC Current Gain–
: $h_{FE} = 40(\text{Min}) @ I_C = 0.2\text{ A}$
- Low Collector Saturation Voltage–
: $V_{CE(sat)} = 0.3\text{ V}(\text{Max.}) @ I_C = 0.5\text{ A}$
- Complement to Type MJE243

APPLICATIONS



- Designed for low power audio amplifier and low-current, high-speed switching applications.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	100	V
V_{CEO}	Collector-Emitter Voltage	100	V
V_{EBO}	Emitter-Base Voltage	7	V
I_C	Collector Current-Continuous	4	A
I_{CM}	Collector Current-Peak	8	A
I_B	Base Current	1	A
P_C	Collector Power Dissipation $T_a=25^\circ\text{C}$	1.5	W
	Collector Power Dissipation $T_c=25^\circ\text{C}$	15	
T_j	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-65~150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	8.34	$^\circ\text{C/W}$
$R_{th\ j-a}$	Thermal Resistance, Junction to Ambient	83.4	$^\circ\text{C/W}$

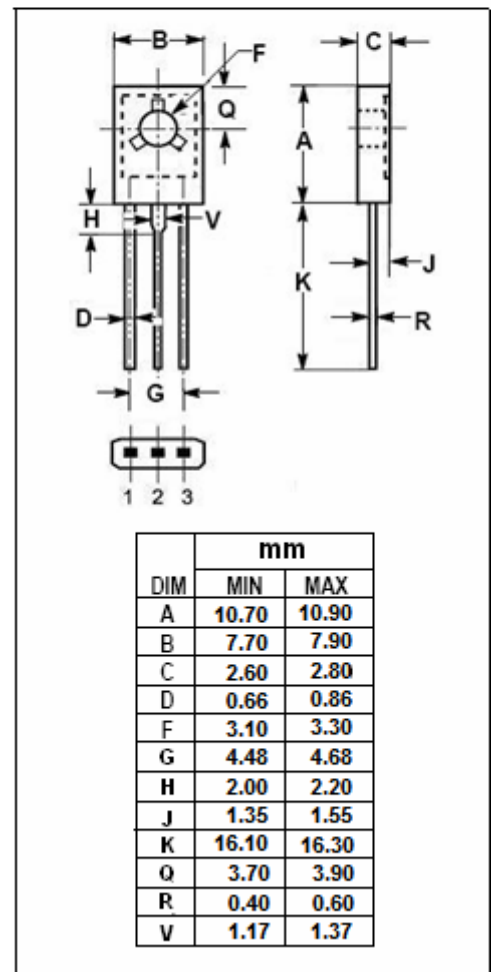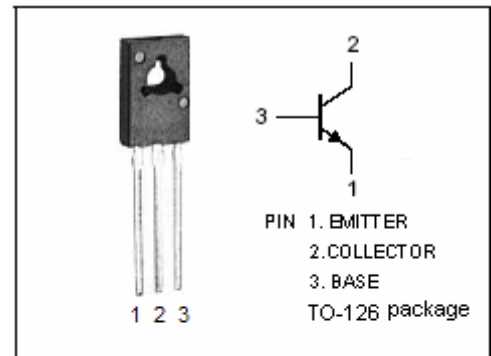

ELECTRICAL CHARACTERISTICS

$T_C = 25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C = 10\text{mA}$; $I_B = 0$	100		V
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage	$I_C = 0.5\text{ A}$; $I_B = 50\text{mA}$		0.3	V
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage	$I_C = 1\text{ A}$; $I_B = 0.1\text{A}$		0.6	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C = 2\text{ A}$; $I_B = 0.2\text{A}$		1.8	V
$V_{BE(on)}$	Base-Emitter On Voltage	$I_C = 0.5\text{A}$; $V_{CE} = 1\text{V}$		1.5	V
I_{CBO}	Collector Cutoff Current	$V_{CB} = 100\text{V}$; $I_E = 0$ $V_{CB} = 100\text{V}$; $I_E = 0$; $T_C = 125^\circ\text{C}$		0.1 0.1	$\mu\text{ A}$ mA
I_{EBO}	Emitter Cutoff Current	$V_{EB} = 7\text{V}$; $I_C = 0$		0.1	$\mu\text{ A}$
h_{FE-1}	DC Current Gain	$I_C = 0.2\text{ A}$; $V_{CE} = 1\text{V}$	40	180	
h_{FE-2}	DC Current Gain	$I_C = 1\text{ A}$; $V_{CE} = 1\text{V}$	15		
f_T	Current-Gain—Bandwidth Product	$I_C = 0.1\text{ A}$; $V_{CE} = 10\text{V}$; $f_{\text{test}} = 10\text{MHz}$	40		MHz
C_{OB}	Collector Capacitance	$I_E = 0$; $V_{CB} = 10\text{V}$; $f_{\text{test}} = 0.1\text{MHz}$		50	pF