



P-DUKE POWER

DOS10-05T · DOH10-05T Series


DC-DC Converter
Up to 10 Amps

3

YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT

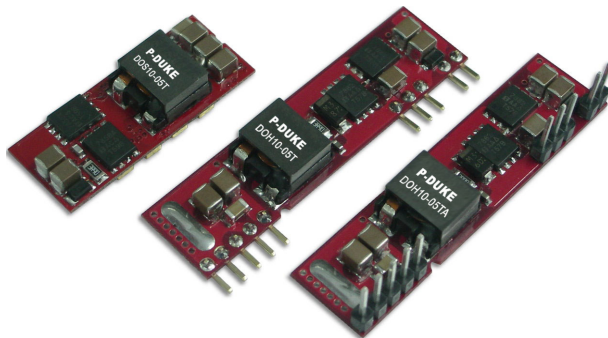

Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



Railway

c us

CB CE

NO
Min. Load
Required

REMOTE
ON
OFF

OCP

SCP

UVP

PART NUMBER STRUCTURE

DOS10 -

Series Name

05

Input
Voltage
(VDC)

T

Package

-

P

Remote Control
Options

DOS10: SMD TYPE
DOH10: SIP TYPE

05: 2.4~5.5

SMD TYPE
SIP TYPE

T: No Assembly
T: Vertical Mounting SIP
TA: Horizontal Mounting SIP

□: Negative Logic
P: Positive Logic

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current Vin(nom) @ No Load 0.75VDC / 3.3VDC	Efficiency Vin(nom), 3.3VDC @Full Load	Maximum Capacitor Load ESR $\geq 1\text{m}\Omega$ / ESR $\geq 10\text{m}\Omega$
	VDC	VDC	A	mA	%	μF
DOS10-05T	2.4 ~ 5.5 Vin(min.)=Vout(set)+0.5	0.75 ~ 3.3	10	100 / 130	95	1000 / 5000
DOS10-05T-P						
DOH10-05T						
DOH10-05T-P						
DOH10-05TA						
DOH10-05TA-P						

INPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating input voltage range	Vout(set) < Vin-0.5VDC	2.4	5	5.5	VDC
Maximum input current	Vin=2.4 to 5.5VDC, Io=Io(max.)		10		A
Start up voltage				2.4	VDC
Shutdown voltage		1.6	2.0	2.2	VDC
Input filter	*It is needed to add external input capacitors are required 3pcs of 150 μF low-ESR polymer capacitors and 2pcs of 47 μF ceramic capacitors in parallel. The capacitors should connect as close as possible to the input terminals that ensuring module stability.		Capacitor type		

OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Voltage accuracy	% of Vout(set)	-2.0		+2.0	%
Line regulation	Vin=Vout(set)+0.5VDC to Vin(max.) at Full Load	-0.3		+0.3	%
Load regulation	No Load to Full Load	-0.4		+0.4	%
Voltage adjustability		0.7525		3.63	VDC
Ripple and noise	Measured by 20MHz bandwidth, with a 1 μF MLCC & a 10 μF T/C			15 50	mVrms mVp-p
Temperature regulation	T _A = -40°C to +85°C	-0.4		+0.4	%
Dynamic load response	With a 1 μF MLCC & a 10 μF T/C				
	$\Delta I_o / \Delta t = 2.5\text{A}/\mu\text{s}$, Vin(nom) Peak deviation		200		mV
	50% load step change Setting time(Vout<10%peak deviation)		25		μs
	With 2pcs of 150 μF polymer capacitors				
Over load protection	$\Delta I_o / \Delta t = 2.5\text{A}/\mu\text{s}$, Vin(nom) Peak deviation		100		mV
	50% load step change Setting time(Vout<10%peak deviation)		100		μs
	% of Iout rated		200		%
Short circuit protection		Continuous, automatics recovery			
Output voltage overshoot-startup	Vin=2.4~5.5VDC at Full Load		1.0		%

GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage				None	
Switching frequency		270	300	330	kHz
Safety meets				IEC/ EN/ UL62368-1	
Weight				6.0g (0.21oz)	
MTBF	MIL-HDBK-217F, Full load			3.239 x 10 ⁶ hrs	

ENVIRONMENTAL SPECIFICATIONS


Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	With derating	-40		+85	°C
Over temperature protection			125		°C
Storage temperature range		-55		+125	°C
Thermal shock				MIL-STD-810F	
Vibration				MIL-STD-810F	
Relative humidity(non-condensing)				5% to 95% RH	
Lead-free reflow solder process	Only for SMD type			IPC J-STD-020E	
Moisture sensitivity level(MSL)	Only for SMD type			IPC J-STD-033C Level 2a	

FEATURE SPECIFICATIONS


Parameter	Conditions	Min.	Typ.	Max.	Unit
Remote ON/OFF	Referred to GND pin Negative logic DC-DC ON (Standard) DC-DC OFF Positive logic DC-DC ON (Option) DC-DC OFF Input current of Ctrl pin Remote off input current *Positive logic:ON/OFF is open collector/drain logic input Negative logic:ON/OFF pin is open collector/drain logic input with external pull –up resistor	0.01	Open or 0 ~ 0.3VDC 1.5VDC ~ Vin(max.) Open or Vin ~Vin(max.) 0 ~ 0.3VDC 1.5	1.0	mA mA
Remote sense range	If remote sense is not being used, +SENSE pin should connect to +Vout pin.			0.5	VDC
Rise time	Time for Vout to rise from 10% to 90%of Vout(set)			6	ms
Turn-on delay time	Case 1, Case 2 *Case 1: ON/OFF input is set to logic low (module on) and then input power is applied (delay from instant at which Vin=Vin(min.) until Vout=10% of Vout(set)) *Case 2:Input power is applied for at least one second and then the ON/OFF input is set to logic low (delay from instant at which Von/off=0.3VDC until Vout=10% of Vout(set))		1		ms

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

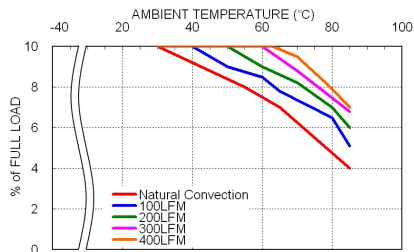

DOS10-05T, Vout=3.3V
Derating Curve

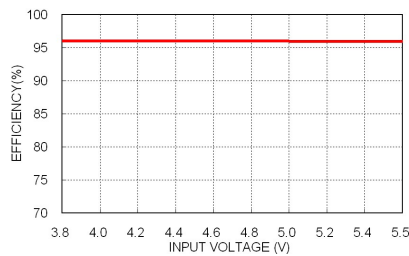

DOS10-05T, Vout=3.3V
Efficiency vs. Input Voltage

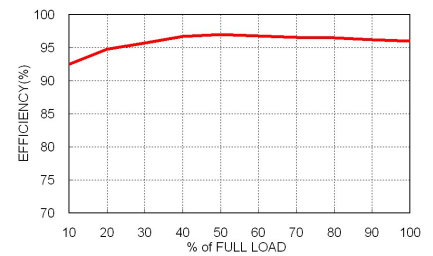

DOS10-05T, Vout=3.3V
Efficiency vs. Output Load

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.

To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.


The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
DOS10-05T□□□	15	Fast-Acting
DOH10-05T□□□	15	Fast-Acting

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

MECHANICAL DRAWING

DOS10-05T

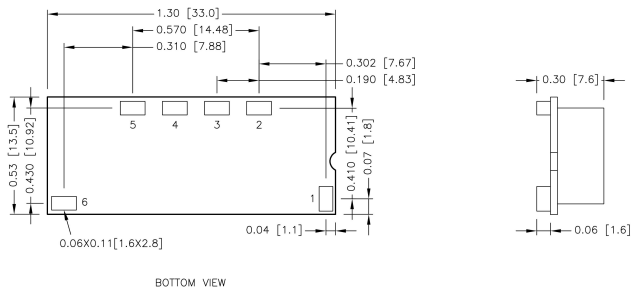


BOTTOM VIEW

PIN CONNECTION

PIN	DEFINE
1	Ctrl
2	+Sense
3	Trim
4	+Vout
5	GND
6	+Vin

DOH10-05T

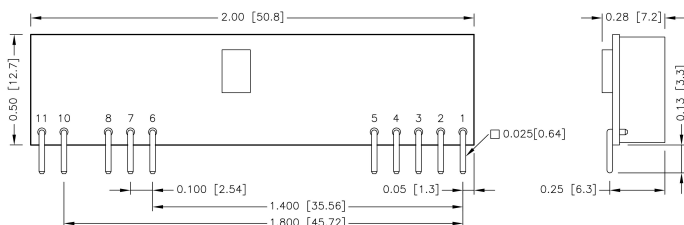


BOTTOM VIEW

PIN CONNECTION

PIN	DEFINE
1	+Vout
2	+Vout
3	+Sense
4	+Vout
5	GND
6	GND
7	+Vin
8	+Vin
10	Trim
11	Ctrl

DOH10-05TA

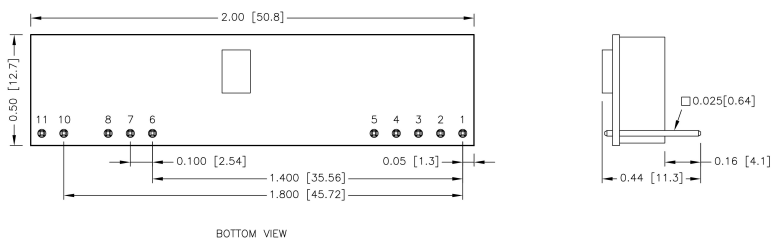

BOTTOM VIEW


PIN CONNECTION

PIN	DEFINE
1	+Vout
2	+Vout
3	+Sense
4	+Vout
5	GND
6	GND
7	+Vin
8	+Vin
10	Trim
11	Ctrl

1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]
x.xxx±0.01 [x.xx±0.25]
3. Pin dimension tolerance ±0.004[0.10]


RECOMMENDED PAD LAYOUT

DOS10-05T

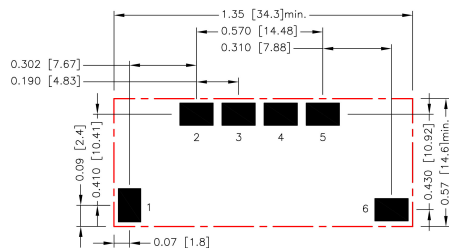


All dimensions in inch[mm]
 Pad size(lead free recommended)
 Top view pad 1.2.3.4.5.6: 0.150x0.102[3.80x2.60]

DOH10-05T

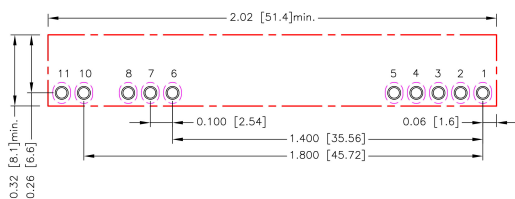

All dimensions in inch[mm]
 Pad size(lead free recommended)
 Through hole 1.2.3.4.5.6.7.8.10.11: $\Phi 0.047$ [1.20]
 Top view pad 1.2.3.4.5.6.7.8.10.11: $\Phi 0.059$ [1.50]
 Bottom view pad 1.2.3.4.5.6.7.8.10.11:
 Groove R0.040[1.02]L-0.094[2.40]

DOH10-05TA

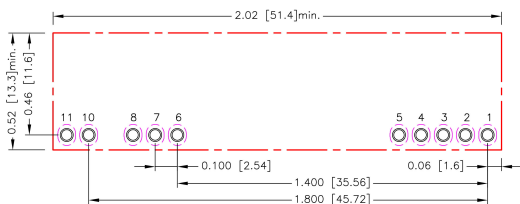

All dimensions in inch[mm]
 Pad size(lead free recommended)
 Through hole 1.2.3.4.5.6.7.8.10.11: $\Phi 0.047$ [1.20]
 Top view pad 1.2.3.4.5.6.7.8.10.11: $\Phi 0.059$ [1.50]
 Bottom view pad 1.2.3.4.5.6.7.8.10.11:
 Groove R0.040[1.02]L-0.094[2.40]

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments; however, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convention, and radiation to the surrounding Environment. Proper cooling can be verified by measuring the point as the figure below. The temperature at this location should not exceed 115°C.

When Operating, adequate cooling must be provided to maintain the test point temperature at or below 115°C.


Although the maximum point Temperature of the power modules is 115°C, you can limit this Temperature to a lower value for extremely high reliability.

The unit will shutdown if the thermal reference point exceeds 125°C (typical), but the thermal shutdown is not intended as a guarantee that the unit will survive temperature beyond its rating.


The module will automatically restarts after it cools down.

- Thermal test condition with vertical direction by natural convection (20LFM).


DOS10-05T

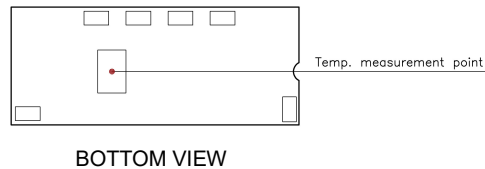

DOH10-05T

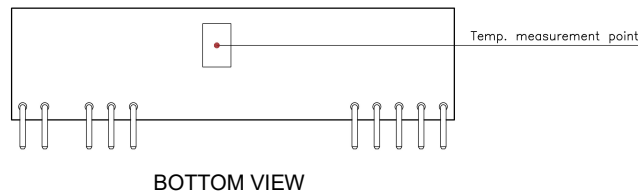


DOH10-05TA

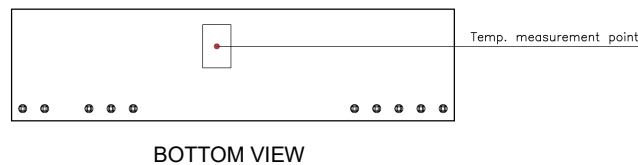

OUTPUT VOLTAGE PROGRAMMING

Output voltage programmable from 0.75V to 3.3V by connecting a single resistor (shown as Trim Table) between the Trim and GND pins of the module. To calculate the value of the resistor Rtrim for a particular output voltage Vout, use the following equation:


■ **Rtrim Equation :**
$$R_{trim} = \left[\frac{21070}{V_{out} - 0.7525} - 5110 \right] \Omega$$

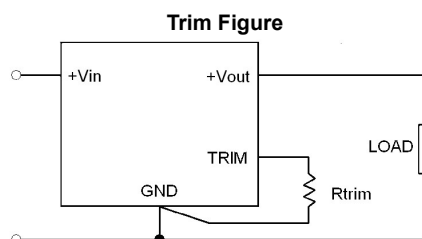

Trim Table

Vout(set) (VDC)	Rtrim (kΩ)
0.7525	Open
1.2	41.973
1.5	23.077
1.8	15.004
2.5	6.974
3.3	3.160

LEAD FREE REFLOW PROFILE For SMD Type

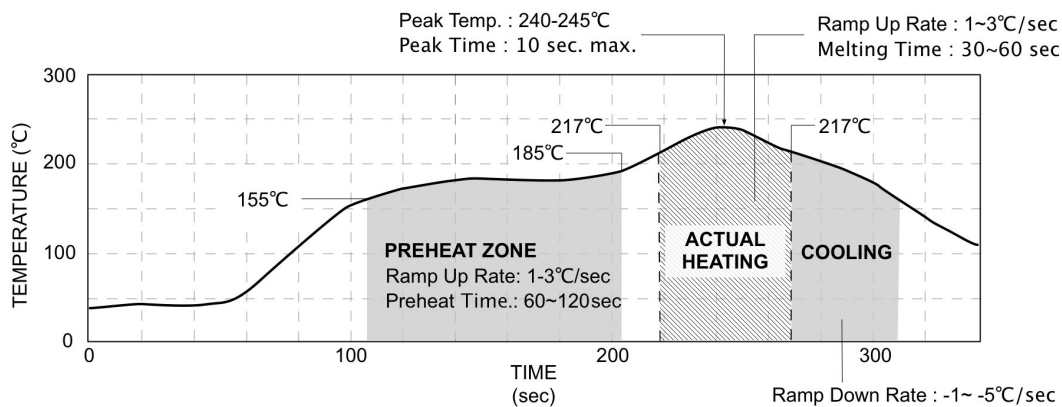

*The curves define the maximum peak reflow temperature permissible measured on pin1 or Vin pin.