



P-DUKE POWER

PDL03W Series


DC-DC Converter
Up to 3 Watts

3

YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



Railway

c US

CB CE

3000
VDC
Isolation
Voltage

1600
VDC
Isolation
Voltage

4 : 1
Wide
Input
Range

NO
Min. Load
Required

REMOTE
ON
OFF

SCP

PART NUMBER STRUCTURE

PDL03 -

48

S

05

W

H

Series Name

Input
Voltage
(VDC)

Output
Quantity

Output
Voltage
(VDC)

Input
Range

Isolation
Options

12:4.5~18
24:9~36
48:18~75

S:Single

3P3:3.3
05:5
09:9
12:12
15:15

4 : 1

□: Standard type
1600VDC isolation
H: 3000VDC isolation



D: Dual

05:±5
12:±12
15:±15

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @ Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	μF
PDL03-12S3P3W	4.5 ~ 18	3.3	700	35	74	3300
PDL03-12S05W	4.5 ~ 18	5	600	40	78	1680
PDL03-12S09W	4.5 ~ 18	9	333	40	79	1000
PDL03-12S12W	4.5 ~ 18	12	250	40	80	820
PDL03-12S15W	4.5 ~ 18	15	200	40	80	680
PDL03-12D05W	4.5 ~ 18	±5	±300	40	80	±1000
PDL03-12D12W	4.5 ~ 18	±12	±125	40	80	±470
PDL03-12D15W	4.5 ~ 18	±15	±100	40	80	±330
PDL03-24S3P3W	9 ~ 36	3.3	700	20	75	3300
PDL03-24S05W	9 ~ 36	5	600	20	80	1680
PDL03-24S09W	9 ~ 36	9	333	19	80	1000
PDL03-24S12W	9 ~ 36	12	250	20	82	820
PDL03-24S15W	9 ~ 36	15	200	19	82	680
PDL03-24D05W	9 ~ 36	±5	±300	25	79	±1000
PDL03-24D12W	9 ~ 36	±12	±125	25	81	±470
PDL03-24D15W	9 ~ 36	±15	±100	25	81	±330
PDL03-48S3P3W	18 ~ 75	3.3	700	12	74	3300
PDL03-48S05W	18 ~ 75	5	600	12	80	1680
PDL03-48S09W	18 ~ 75	9	333	13	80	1000
PDL03-48S12W	18 ~ 75	12	250	14	81	820
PDL03-48S15W	18 ~ 75	15	200	14	81	680
PDL03-48D05W	18 ~ 75	±5	±300	14	79	±1000
PDL03-48D12W	18 ~ 75	±12	±125	14	81	±470
PDL03-48D15W	18 ~ 75	±15	±100	14	81	±330

INPUT SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating input voltage range	12Vin(nom) 24Vin(nom) 48Vin(nom)		4.5 9 18	12 24 48	18 36 75	VDC
Start up time	Constant resistive load	Power up Remote ON/OFF		30 30		ms
Input surge voltage	100 ms, max.	12Vin(nom) 24Vin(nom) 48Vin(nom)			36 50 100	VDC
Input filter			Capacitor type			
Remote ON/OFF	Ctrl pin applied current via 1kΩ	DC-DC ON DC-DC OFF Remote off input current	2	3	4 2.5	mA mA
Application circuit DC-DC ON  DC-DC OFF 						

OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Voltage accuracy		-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load	-0.2		+0.2	%
Load regulation	No Load to Full Load	-1.0		+1.0	%
	Single	-1.0		+1.0	
	Dual	-1.0		+1.0	%
	5% Load to 100% Full Load	-0.5		+0.5	%
Cross regulation	Asymmetrical load 25%/100% FL	-5.0		+5.0	%
Ripple and noise	20MHz bandwidth		30		mVp-p
Temperature coefficient		-0.02		+0.02	%/°C
Transient response recovery time	25% load step change		250		µs
Short circuit protection		Continuous, automatic recovery			

GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage	1 minute Input to Output Standard Type Suffix "H"	1600 3000			VDC
Isolation resistance	500VDC	1			GΩ
Isolation capacitance	Standard Type Suffix "H"			200 40	pF
Switching frequency	Full load to minimum load	100			kHz
Safety approvals	IEC /EN /UL62368-1			UL:E193009 CB:UL(Demko)	
Case material				Non-conductive black plastic	
Base material				None	
Potting material				Silicone (UL94 V-0)	
Weight				4.8g (0.17oz)	
MTBF	MIL-HDBK-217F			3.482 x 10 ⁶	hrs

ENVIRONMENTAL SPECIFICATIONS


Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	With derating	-40		+100	°C
Maximum case temperature				100	°C
Storage temperature range		-55		+125	°C
Thermal shock				MIL-STD-810F	
Vibration				MIL-STD-810F	
Relative humidity				5% to 95% RH	

EMC SPECIFICATIONS


Parameter	Conditions	Level
EMI	EN55032 With external components	Class A , Class B
EMS	EN55024	
ESD	EN61000-4-2 Air ± 8kV and Contact ± 6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3 10 V/m	Perf. Criteria A
Fast transient	EN61000-4-4 ± 2kV	Perf. Criteria A
Surge	EN61000-4-5 ±1kV With an external input filter capacitor (Nippon chemi-con KY series, 100µF/100V)	Perf. Criteria A
Conducted immunity	EN61000-4-6 10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8 100A/m continuous; 1000A/m 1 second	Perf. Criteria A

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

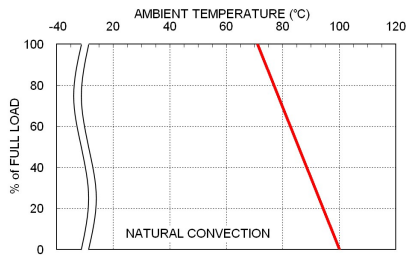

PDL03-24S05W Derating Curve

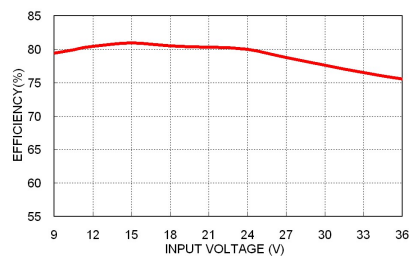

PDL03-24S05W Efficiency vs. Input Voltage

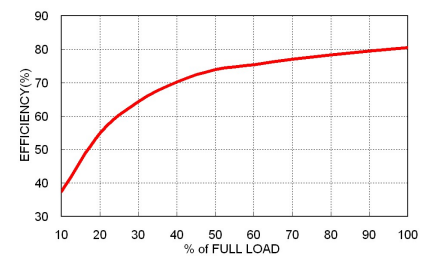

PDL03-24S05W Efficiency vs. Output Load

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.


To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.

The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
PDL03-12S□□W · PDL03-12D□□W	2	Slow-Blow
PDL03-24S□□W · PDL03-24D□□W	1.6	Slow-Blow
PDL03-48S□□W · PDL03-48D□□W	1	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

MECHANICAL DRAWING

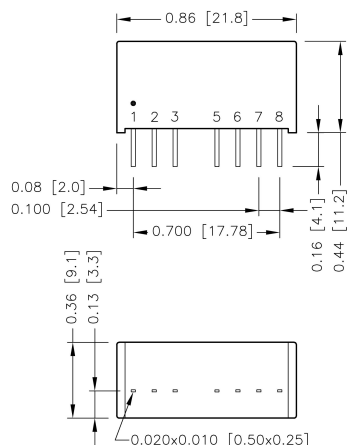

BOTTOM VIEW


PIN	SINGLE	DUAL
1	-Vin	-Vin
2	+Vin	+Vin
3	Ctrl	Ctrl
5	NC*/No pin**	NC*/No pin**
6	+Vout	+Vout
7	-Vout	Common
8	NC	-Vout

*NC pin for standard type model.

**No pin for 3kVDC isolation model (suffix "H").

1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]
x.xxx±0.01 [x.xx±0.25]
3. Pin dimension tolerance ±0.004 [0.10]

RECOMMENDED PAD LAYOUT

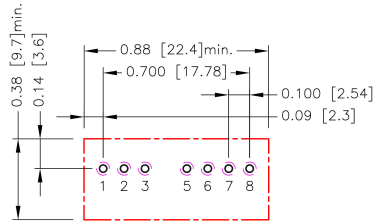


All dimensions in inch[mm]
 Pad size(lead free recommended)
 Through hole 1.2.3.5.6.7.8: $\Phi 0.031[0.80]$
 Top view pad 1.2.3.5.6.7.8: $\Phi 0.039[1.00]$
 Bottom view pad 1.2.3.5.6.7.8: $\Phi 0.063[1.60]$

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments. However, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding Environment. Proper cooling can be verified by measuring the point as the figure below. The temperature at this location should not exceed "Maximum case temperature". When Operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature". You can limit this Temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).



TOP VIEW