


Small Signal Zener Diode



SOT-23

Features

- Epoxy meets UL-94 V-0 flammability rating and halogen free
- Moisture Sensitivity Level 1
- Zener Voltage 2.4V~47V
- V_Z -tolerance for both diodes in one case is $\leq 5\%$
- Part no. with suffix "Q" means AEC-Q101 qualified

Applications

- General regulation functions

Mechanical Data

- **Case:** SOT-23
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■Limiting Values (Absolute Maximum Rating, $T_A=25^\circ\text{C}$ Unless otherwise specified)

Characteristic	Symbol	Value	Units
Power Dissipation	$P_D^{[1]}$	300	mW
Maximum Forward Voltage ($I_F=10\text{mA}$)	V_F	0.9	V
Maximum Regulator Current	$I_{ZM}^{[1]}$	P_D / V_Z	mA
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	417	$^\circ\text{C/W}$
Storage Temperature Range	T_{STG}	-55~+150	$^\circ\text{C}$
Operation Temperature	T_J	-55~+150	$^\circ\text{C}$

[1] Single diode loaded

■Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
AZ23C2V4Q THRU AZ23C47Q	F2	Approximate 0.01	3000	30000	120000	7" reel



AZ23C2V4Q THRU AZ23C47Q

RoHS
COMPLIANT

■Electrical Characteristics (T_a=25°C Unless otherwise specified)

Type Number	Device Marking	V _z at I _{zt} (V)			I _{zt} mA	Z _{zt} (Ω)		Z _{zk} (Ω)		I _R (μA)@V _R		Typical Temperature Coefficient@ I _{ZTC} mV/°C		Test Current I _{ZTC} mA	Typical Junction Capacitance pF
		min.	typ.	max.		I _{zk} (mA)	max.	I _{zk} (mA)	max.	uA	V _R (V)	Min.	Max.		
AZ23C2V4Q	KD0	2.28	2.4	2.56	5	5	100	1.0	600	50	1.0	-3.5	0	5	116
AZ23C2V7Q	KD1	2.5	2.7	2.9	5	5	100	1.0	600	20	1.0	-3.5	0	5	111
AZ23C3V0Q	KD2	2.8	3.0	3.2	5	5	95	1.0	600	10	1.0	-3.5	0	5	129
AZ23C3V3Q	KD3	3.1	3.3	3.5	5	5	95	1.0	600	5	1.0	-3.5	0	5	123
AZ23C3V6Q	KD4	3.4	3.6	3.8	5	5	90	1.0	600	5	1.0	-3.5	0	5	120
AZ23C3V9Q	KD5	3.7	3.9	4.1	5	5	90	1.0	600	3	1.0	-3.5	0	5	118
AZ23C4V3Q	KD6	4.0	4.3	4.6	5	5	90	1.0	600	3	1.0	-3.5	0	5	105
AZ23C4V7Q	KD7	4.4	4.7	5.0	5	5	80	1.0	500	3	2.0	-3.5	0.2	5	96
AZ23C5V1Q	KD8	4.8	5.1	5.4	5	5	60	1.0	480	2	2.0	-2.7	1.2	5	72
AZ23C5V6Q	KD9	5.2	5.6	6.0	5	5	40	1.0	400	1	2.0	-2	2.5	5	62
AZ23C6V2Q	KDA	5.8	6.2	6.6	5	5	10	1.0	150	3	4.0	0.4	3.7	5	54
AZ23C6V8Q	KDB	6.4	6.8	7.2	5	5	15	1.0	80	2	4.0	1.2	4.5	5	49
AZ23C7V5Q	KDC	7.0	7.5	7.9	5	5	15	1.0	80	1	5.0	2.5	5.3	5	44
AZ23C8V2Q	KDD	7.7	8.2	8.7	5	5	15	1.0	80	0.7	5.0	3.2	6.2	5	40
AZ23C9V1Q	KDE	8.5	9.1	9.6	5	5	15	1.0	100	0.5	6.0	3.8	7.0	5	38
AZ23C10Q	KDF	9.4	10	10.6	5	5	20	1.0	150	0.2	7.0	4.5	8.0	5	33
AZ23C11Q	KDG	10.4	11	11.6	5	5	20	1.0	150	0.1	8.0	5.4	9.0	5	30
AZ23C12Q	KDH	11.4	12	12.7	5	5	25	1.0	150	0.1	8.0	6.0	10.0	5	28
AZ23C13Q	KDI	12.4	13	14.1	5	5	30	1.0	170	0.1	8.0	7.0	11.0	5	25
AZ23C15Q	KDJ	13.8	15	15.6	5	5	30	1.0	200	0.1	10.5	9.2	13.0	5	23
AZ23C16Q	KDK	15.3	16	17.1	5	5	40	1.0	200	0.1	11.2	10.4	14.0	5	22
AZ23C18Q	KDL	16.8	18	19.1	5	5	45	1.0	225	0.1	12.6	12.4	16.0	5	19
AZ23C20Q	KDM	18.8	20	21.2	5	5	55	1.0	225	0.1	14.0	14.4	18.0	5	18
AZ23C22Q	KDN	20.8	22	23.3	5	5	55	1.0	250	0.1	15.4	16.4	20.0	5	17
AZ23C24Q	KDO	22.8	24	25.6	5	5	70	1.0	250	0.1	16.8	18.4	22.0	5	16
AZ23C27Q	KDP	25.1	27	28.9	2	2	80	0.5	300	0.1	18.9	21.4	25.3	2	15
AZ23C30Q	KDQ	28	30	32	2	2	80	0.5	300	0.1	21.0	24.4	29.4	2	14
AZ23C33Q	KDR	31	33	35	2	2	80	0.5	325	0.1	23.1	27.4	33.4	2	14
AZ23C36Q	KDS	34	36	38	2	2	90	0.5	350	0.1	25.2	30.4	37.4	2	13
AZ23C39Q	KDT	37	39	41	2	2	130	0.5	350	0.1	27.3	33.4	41.2	2	13
AZ23C43Q	D30	40	43	46	2	2	100	0.5	700	0.1	32	37.6	50.6	2	13
AZ23C47Q	D31	44	47	50	2	2	100	0.5	750	0.1	35	42.0	55.8	2	12



■ Characteristics(Typical)

Fig.1 - Zener Current vs. Zener Voltage

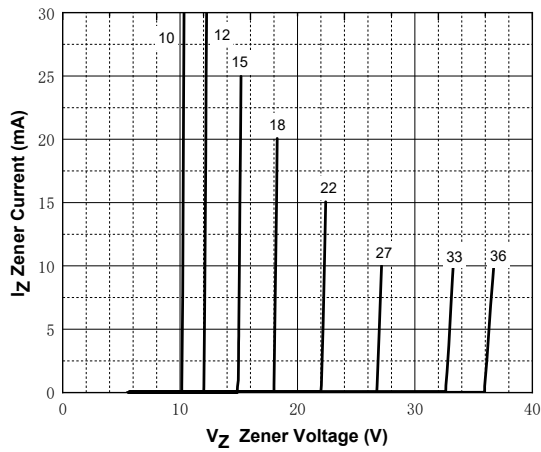


Fig.2 - Zener Current vs. Zener Voltage

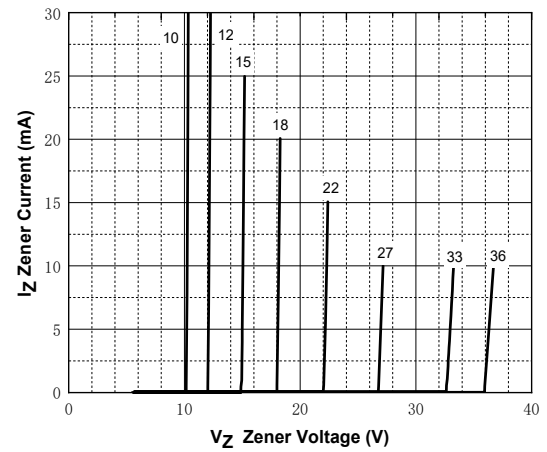


Fig.3 - Zener Current vs. Zener Voltage

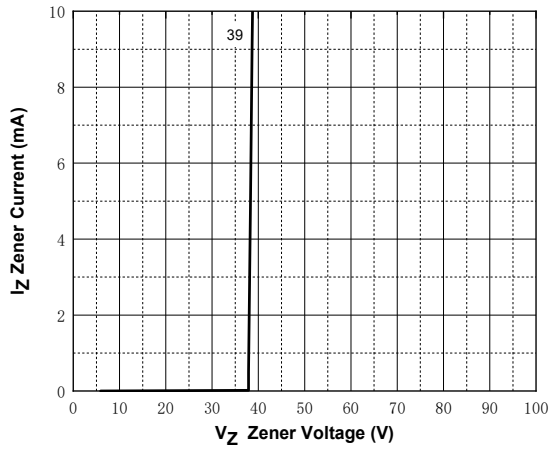


Fig.4 - Typical Temperature Coefficient vs. Test Current



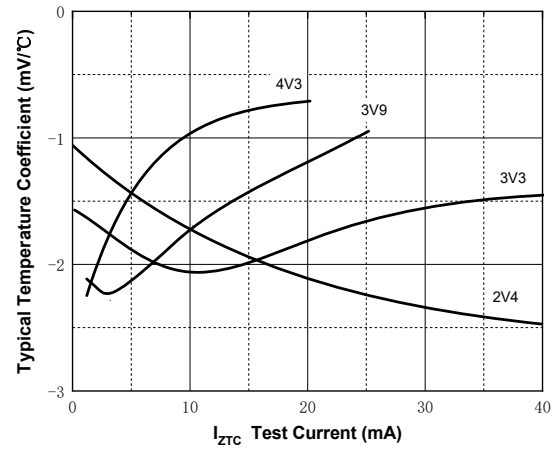


Fig.5 - Typical Temperature Coefficient vs. Test Current



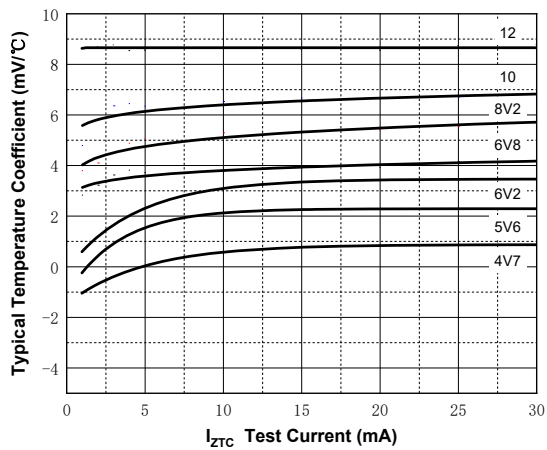


■ Outline Dimensions

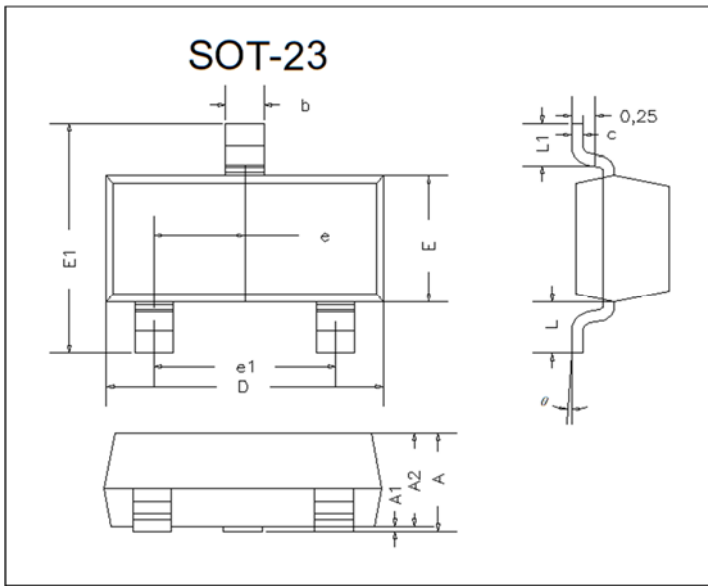

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.035	0.045	0.90	1.15	
A1	0.000	0.004	0.00	0.10	
A2	0.035	0.041	0.90	1.05	
b	0.012	0.020	0.30	0.50	
c	0.004	0.008	0.10	0.20	
D	0.110	0.118	2.80	3.00	
E	0.047	0.055	1.20	1.40	
E1	0.089	0.100	2.25	2.55	
e	0.370TYP		0.95TYP		
e1	0.071	0.079	1.80	2.00	
L	0.220REF		0.55REF		
L1	0.012	0.020	0.30	0.50	
θ	0°	8°	0°	8°	

■ Soldering Footprint

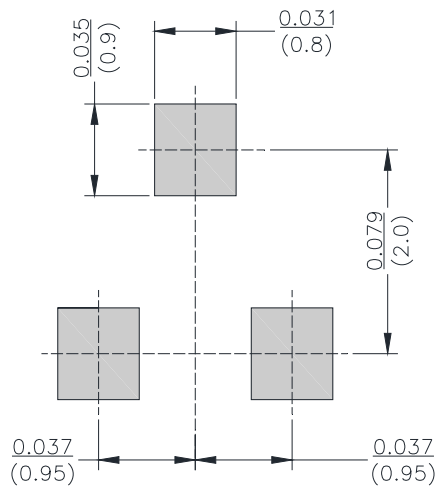

Unit: $\frac{\text{inch}}{\text{mm}}$



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, lifesustaining, or military. Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.