


LIN bus ESD protection diode

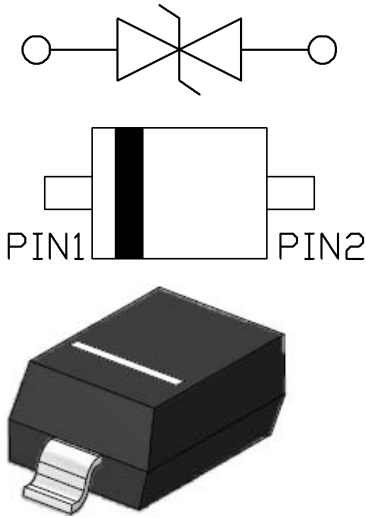

SOD323

Features

- Epoxy meets UL-94 V-0 flammability rating and halogen free
- Moisture Sensitivity Level 1
- Protects One Data Line of LIN
- Max Peak Pulse Power 160 W ($t_p=8/20$ us)
- Low Clamping Voltage
- IEC 61000-4-2, level 4 (ESD)
- Part no. with suffix "Q" means AEC-Q101 qualified

Applications

- Automotive LIN-bus protection
- Asymmetrical diode configuration ensures an optimized protection against ElectroMagnetic Interferences (EMI) of a LIN Electronic Control Unit (ECU)

Mechanical Data

- **Case:** SOD323
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking:** AM

■ Maximum Ratings ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	VALUE
Peak Pulse Power per Line ($t_p=8/20$ us) (Note1)	P_{PP}	W	160
Peak Pulse Current per Line ($t_p=8/20$ us), Pin1 to Pin2 (Note1)	I_{PP}	A	5
Peak Pulse Current per Line ($t_p=8/20$ us), Pin2 to Pin1 (Note1)			3
Storage Temperature Range	T_{stg}	$^{\circ}\text{C}$	-55~+150
Junction Temperature	T_J	$^{\circ}\text{C}$	-55~+150
Human Body Model (HBM)	V_{ESD}	KV	10
IEC 61000-4-2 (contact discharge)		KV	20

Note1: Non-repetitive current pulse 8/20 μs exponential decay waveform according to IEC 61000-4-5.



ESDLIN1524D3Q

■ Electrical Characteristics (Ta=25°C unless otherwise noted)

Item	Symbol	Unit	Conditions	Min	Typ	Max
Reverse Working Voltage	V_{RWM}	V	Pin1 to Pin2 (15V)	-		15
			Pin2 to Pin1 (24V)			24
Reverse Breakdown Voltage	V_{BR}	V	$I_T=1mA$, Pin1 to Pin2 (15V)	17.1		-
			$I_T=1mA$, Pin2 to Pin1 (24V)	25.4		-
Reverse Leakage Current	I_R	nA	$V_{RWM}=15V$, Pin1 to Pin2 (15V)	-		50
			$V_{RWM}=24V$, Pin2 to Pin1 (24V)	-		50
Clamping Voltage (8/20us Pulse)	V_C	V	$I_{PP}=1A$, Pin1 to Pin2 (15V)	-		25
			$I_{PP}=5A$, Pin1 to Pin2 (15V)	-		35
	V_C	V	$I_{PP}=1A$, Pin2 to Pin1 (24V)	-		40
			$I_{PP}=3A$, Pin2 to Pin1 (24V)	-		50
Junction Capacitance	C_j	pF	$V_{BR}=0V$, $f=1MHz$, Pin1 to Pin2 (15V)	-		17
			$V_{BR}=0V$, $f=1MHz$, Pin2 to Pin1 (24V)	-		17

■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
ESDLIN1524D3Q	F2	Approximate 0.045	3000	30000	120000	7" reel

■ Characteristics (Typical)

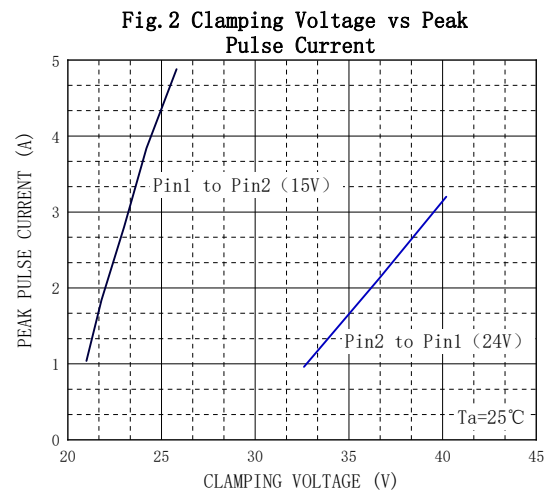
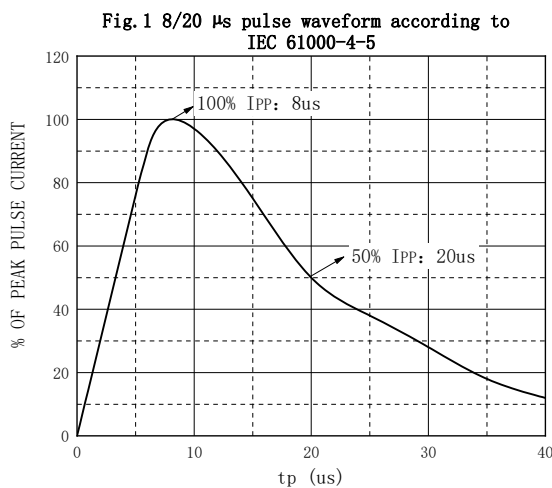


Fig.3 Temperature Power Dissipation Derating

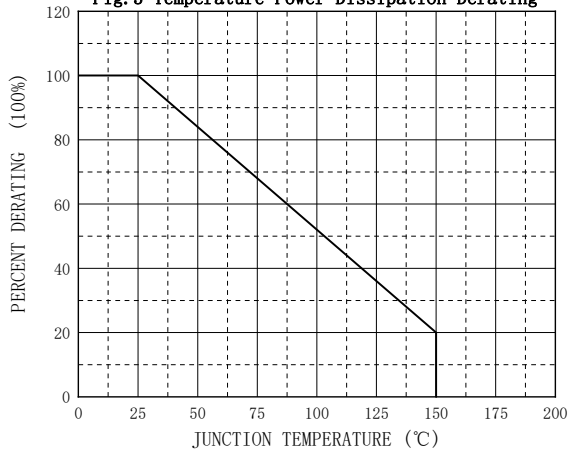


Fig.4 Peak pulse power as a function of exponential pulse duration



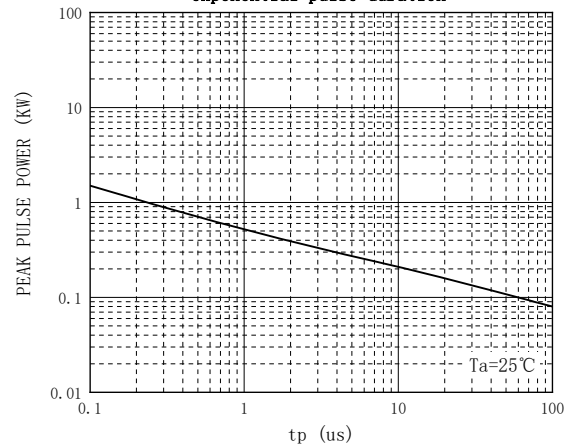


Fig.5 Typical Junction Capacitance vs Reverse Voltage

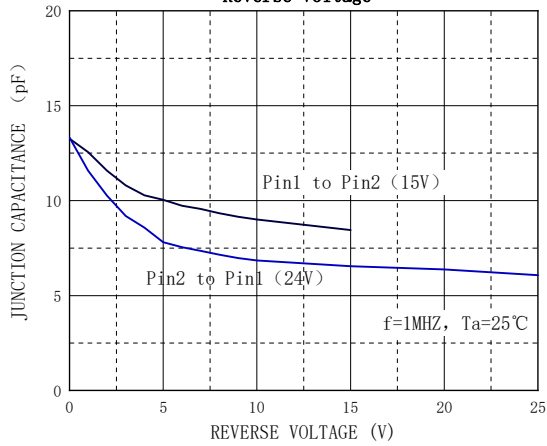


■ Outline Dimensions

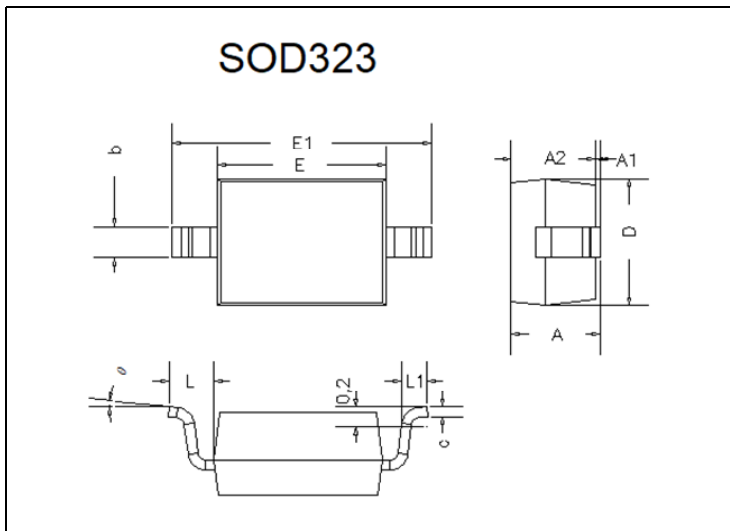

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	-	0.039	-	1.00	
A1	0.000	0.004	0.00	0.10	
A2	0.031	0.035	0.80	0.90	
b	0.010	0.016	0.25	0.40	
c	0.003	0.007	0.08	0.17	
D	0.047	0.055	1.20	1.40	
E	0.063	0.071	1.60	1.80	
E1	0.098	0.106	2.50	2.70	
L	0.019REF		0.475REF		
L1	0.008	0.016	0.20	0.40	
θ	0°	8°	0°	8°	



■ Soldering Footprint

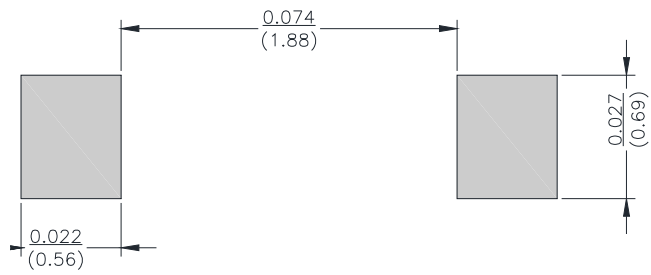

Unit: $\frac{\text{inch}}{\text{mm}}$



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.



ESDLIN1524D3Q

ISSUE	REVISION	DATE
1.0	Add Datasheet	12-Jun-20
1.1	Add IEC 61000-4-2 (contact discharge) 20KV	08-Aug-20
1.2	Review Tj max =150°C	04-Jun-21