


NPN General Purpose Amplifier



Features

- Epoxy meets UL-94 V-0 flammability rating and halogen free
- Moisture Sensitivity Level 1
- High Conductance
- Part no. with suffix "Q" means AEC-Q101 qualified

Mechanical Data

- Case: SOT-323
- Terminals: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- Marking: K2N

SOT-323

■ Maximum Ratings (Ta=25°C unless otherwise noted)

Item	Symbol	Unit	Conditions	Value
Collector-Base Voltage	V_{CBO}	V		60
Collector-Emitter Voltage	V_{CEO}	V		40
Emitter-Base Voltage	V_{EBO}	V		6.0
Collector Current -Continuous	I_C	mA		200
Total Device Dissipation	P_D	mW		200
Thermal Resistance Junction to Ambient	R_{thJA}	K/W		625
Junction Temperature	T_J	°C		-55 to +150
Storage Temperature	T_{STG}	°C		-55 to +150



MMST3904Q

RoHS
COMPLIANT

■ Electrical Characteristics (Ta=25℃ unless otherwise noted)

Item	Symbol	Unit	Conditions	Min	Max
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	Vdc	$I_C = 1.0\text{mA}, I_B = 0$	40	
Collector-base breakdown voltage	$V_{(BR)CBO}$	Vdc	$I_C = 10\mu\text{A}, I_E = 0$	60	
Emitter-base breakdown voltage	$V_{(BR)EBO}$	Vdc	$I_E = 10\mu\text{A}, I_C = 0$	6.0	
Collector cut-off current	I_{CBO}	nA	$V_{CB} = 30\text{Vdc}, I_E = 0$		100
Collector cut-off current	I_{CEX}	nA	$V_{CE} = 30\text{Vdc}, V_{EB} = 3.0\text{Vdc}$		50
DC current gain	h_{FE}		$V_{CE} = 1\text{Vdc}, I_C = 0.1\text{mA}$	40	
	h_{FE}		$V_{CE} = 1\text{Vdc}, I_C = 1.0\text{mA}$	70	
	h_{FE}		$V_{CE} = 1\text{Vdc}, I_C = 10\text{mA}$	100	300
	h_{FE}		$V_{CE} = 1\text{Vdc}, I_C = 50\text{mA}$	60	
	h_{FE}		$V_{CE} = 1\text{Vdc}, I_C = 100\text{mA}$	30	
Collector-emitter saturation voltage	$V_{CE(sat)}$	Vdc	$I_C = 10\text{mA}, I_B = 1.0\text{mA}$		0.2
			$I_C = 50\text{mA}, I_B = 5.0\text{mA}$		0.3
Base-emitter saturation voltage	$V_{BE(sat)}$	Vdc	$I_C = 10\text{mA}, I_B = 1.0\text{mA}$	0.65	0.85
			$I_C = 50\text{mA}, I_B = 5.0\text{mA}$		0.95
Transition frequency	f_T	MHz	$V_{CE} = 20\text{V}, I_C = 10\text{mA}, f = 100\text{MHz}$	250	-
Delay time	t_d	ns	$V_{CC} = 3.0\text{Vdc}, V_{BE} = 0.5\text{Vdc}, I_C = 10\text{mA}, I_{B1} = 1.0\text{mA}$		35
Rise time	t_r	ns			35
Storage time	t_s	ns	$V_{CC} = 3.0\text{Vdc}, I_C = 10\text{mA}, I_{B1} = I_{B2} = 1.0\text{mA}$		200
Fall time	t_f	ns			50

■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MMST3904Q	F2	Approximate 0.006	3000	30000	120000	7" reel



■ Characteristics (Typical)

Figure 1. Static Characteristics

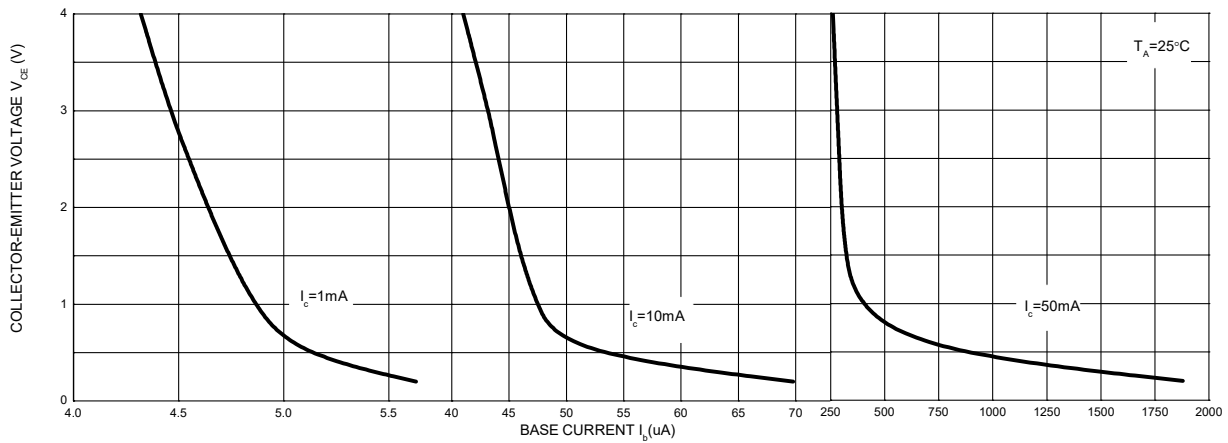


Figure 2. $H_{FE}-I_C$

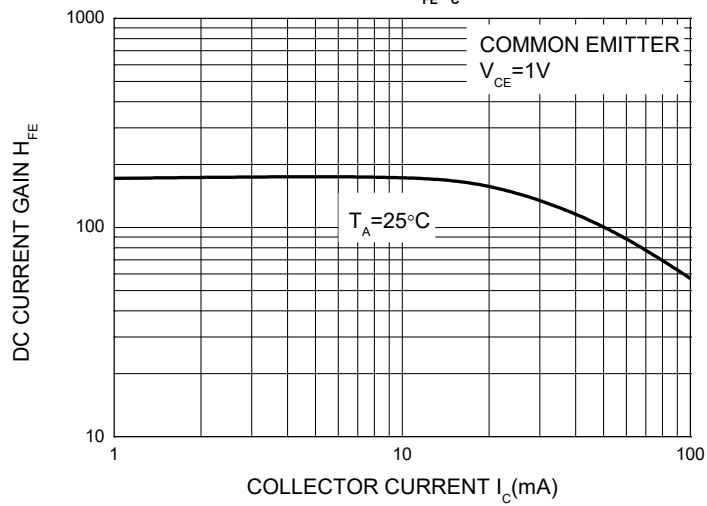


Figure 3. $V_{BESAT}-I_C$



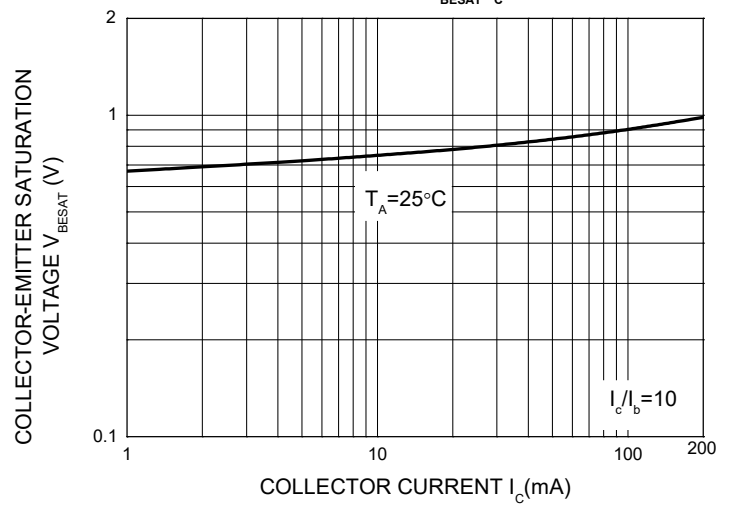


Figure 4. $V_{CESAT}-I_C$

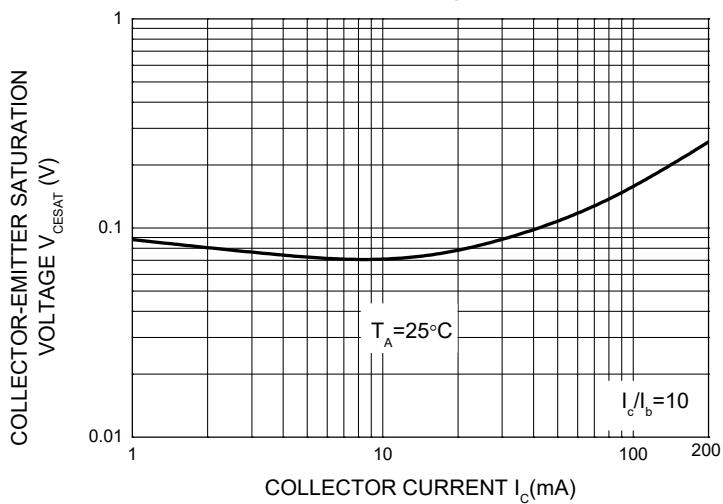


■ SOT-323 Package Outline Dimensions

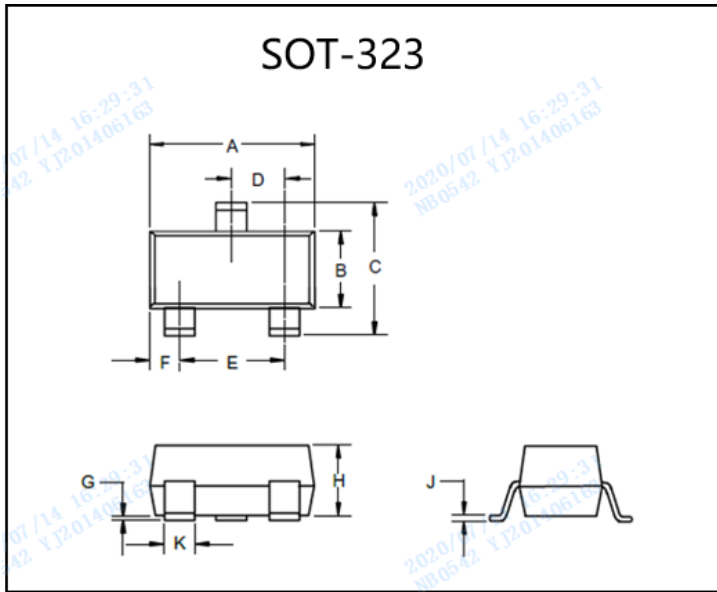

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.071	0.087	1.80	2.20	
B	0.045	0.053	1.15	1.35	
C	0.083	0.096	2.10	2.45	
D	0.026Nominal		0.65Nominal		
E	0.047	0.055	1.20	1.40	
F	0.012	0.016	0.30	0.40	
G	0.000	0.004	0.00	0.10	
H	0.035	0.039	0.90	1.00	
J	0.004	0.010	0.10	0.250	
K	0.006	0.016	0.15	0.40	

■ SOT-323 Suggested Pad Layout

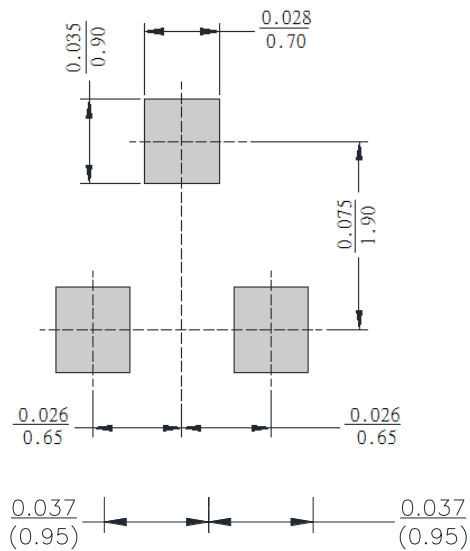

Unit: $\frac{\text{inch}}{\text{mm}}$



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.