
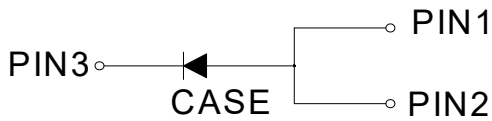


Schottky Rectifier

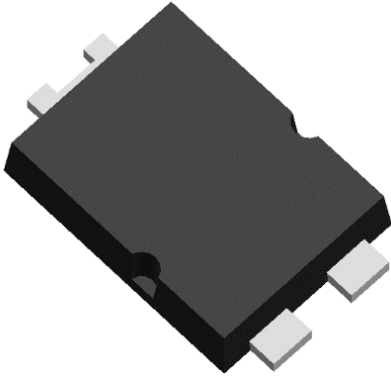

Features

- Ideal for automated placement
- Low power losses
- High forward surge capability
- Meets MSL level1, per J-STD-020, LF maximum peak of 260 °C
- Part no. with suffix "Q" means AEC-Q101 qualified

Typical Applications

For use in lighting, fast switching rectification of power suppliers, DC/AC inverters, DC/DC converters, and freewheeling diodes for polarity protection application for consumer, automotive and telecommunication.

Mechanical Data

- **Package:** TO-277
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, Halogen free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■Maximum Ratings (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	SS5U100PAQ
Device marking code			SS5U100PA
Repetitive Peak Reverse Voltage	V _{RRM}	V	100
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave, 1 cycle, T _a =25°C	I _{FSM}	A	200
Current Squared Time @1ms≤t≤8.3ms T _J =25°C	I ² t	A ² s	166
Non-repetitive avalanche energy at I _{AS} =2.0 A, T _J = 25°C	E _{AS}	mJ	20
Storage Temperature	T _{stg}	°C	-55 ~+150
Junction Temperature	T _J	°C	-55 ~+150

■Electrical Characteristics (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS		Typ	Max
Instantaneous forward voltage	V _F	V	I _F =5.0A	T _A =25°C	0.725	0.8
				T _A =125°C	0.585	0.68
Typical junction capacitance	C _J	pF	V _R =4V, f=1 MHz		270	-
Leakage Current	I _R	μA	V _R =100V	T _A =25°C	0.3	10
		mA		T _A =125°C	0.3	3



SS5U100PAQ

■ Thermal Characteristics ($T_a=25^{\circ}\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	SS5U100PAQ
Typical Thermal Resistance	$R_{\theta J-A}$	$^{\circ}\text{C/W}$	65
	$R_{\theta J-L}$	$^{\circ}\text{C/W}$	3

■ Ordering Information (Example)

PREFERRED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
SS5U100PAQ	F1	Approximate 0.0821	5000	10000	80000	13" reel

■ Characteristics (Typical)

Fig.1:Maximum Forward Current Derating Curve

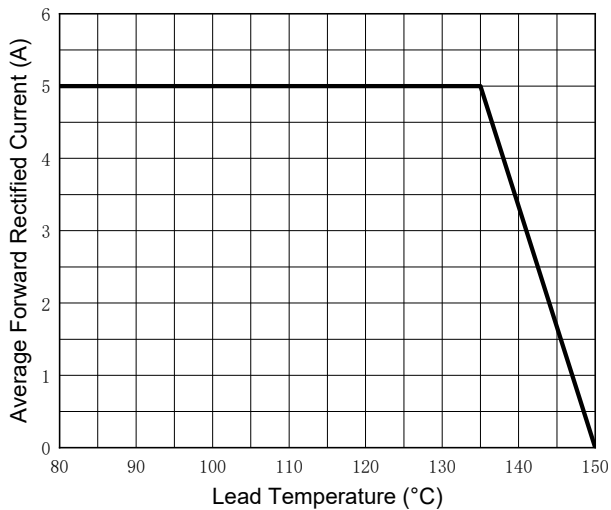


Fig.2:Forward Surge Current Capability

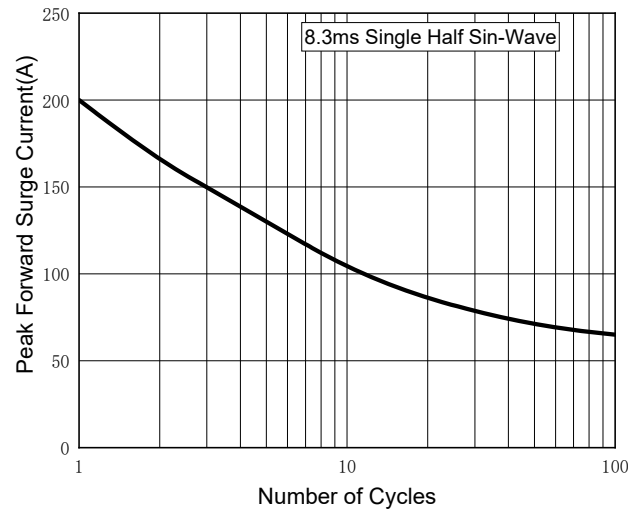


Fig.3:Typical Instantaneous Forward Characteristics


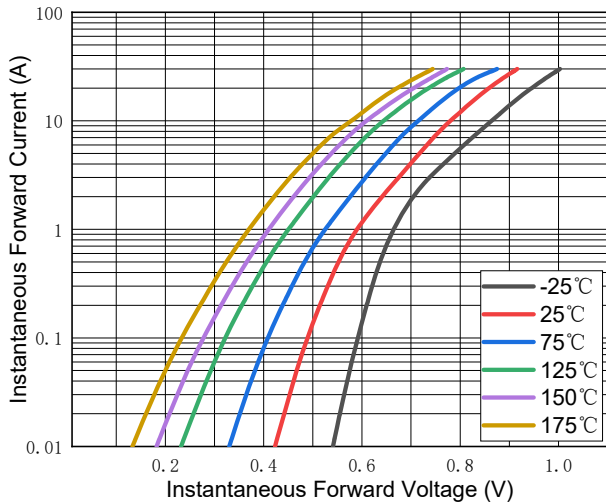



Fig.4:Typical Reverse Characteristics



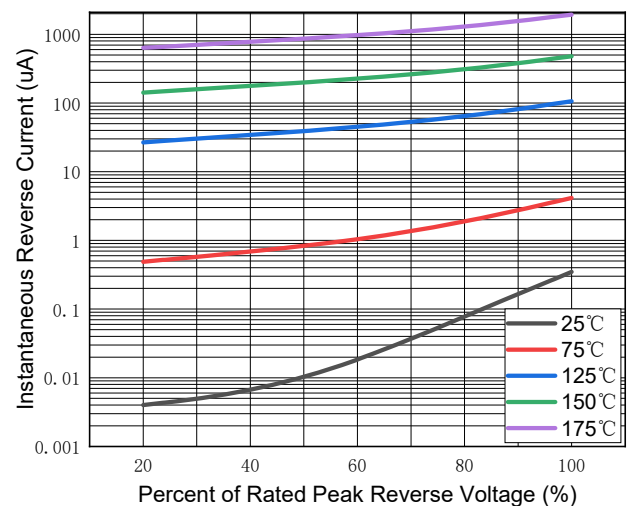


SS5U100PAQ

■ Outline Dimensions

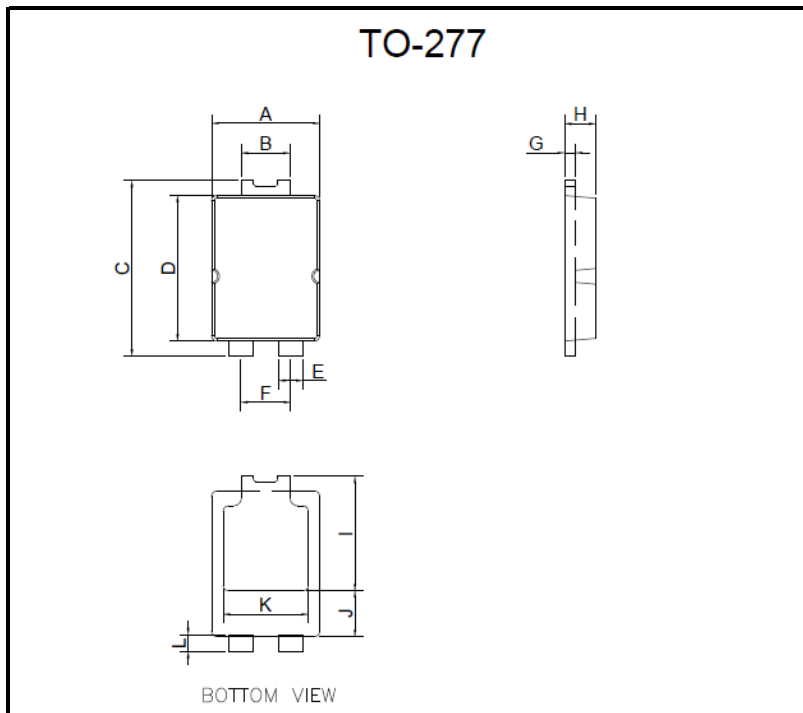

DIM	mm	
	MIN.	MAX.
A	3.90	4.10
B	1.70	1.90
C	6.40	6.60
D	5.30	5.50
E	0.80	1.00
F	1.85 REF	
G	0.35	0.45
H	1.10	1.20
I	4.10	4.50
J	1.50	1.90
K	2.90	3.40
L	0.55	0.75

■ Suggested pad layout

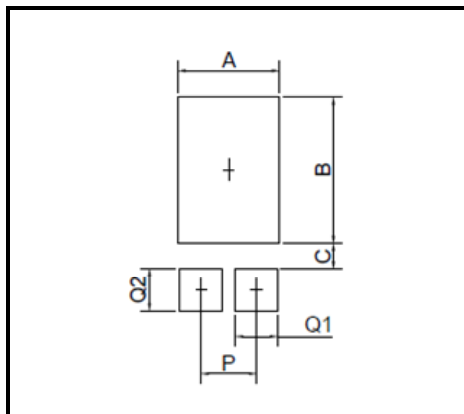

DIM	MIN.(mm)
A	3.36
B	4.86
C	0.85
P	1.84
Q1	1.40
Q2	1.40



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, lifesustaining, or military. Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.