

CD11GK series


- Endurance: +105 °C 12,000~20,000 hours
- Extremely miniaturized, high ripple current
- Suitable for output circuit and input circuit of LED driving power.
- RoHS Compliant



SPECIFICATIONS


Items	Characteristics								
Category Temperature Range	-40~+105°C(160~ 450 V _{dc})								
Rated Voltage Range	160~450 V _{dc}								
Capacitance Tolerance	±20%(M) (at 20°C,120Hz)								
Leakage Current	160~400 V _{dc}	450 V _{dc}		Where, I: Max.leakage current (μA),C:Nominal capacitance (μF), V: Rated voltage (V) (at 20°C after 2 minutes)					
	I≤0.03CV+15μA	I≤0.03CV+25μA							
Dissipation Factor (tanδ)	Rated Voltage(V _{dc})	160	200	250	350	400	450	(at 20°C,120Hz)	
	tanδ (max.)	0.24	0.24	0.24	0.24	0.24	0.24		
Low Temperature Characteristics (Max. Impedance Ratio)	Rated Voltage(V _{dc})	160	200	250	350	400	450	(at 120Hz)	
	Z(-25°C)/Z(+20°C)	3	3	3	5	5	8		
	Z(-40°C)/Z(+20°C)	8	8	8	8	8	12		
Endurance	The specifications listed below shall be met when the capacitors are restored to 20 °C after DC voltage plus rated ripple current is applied for a specified period of time at 105°C, the peak voltage shall not exceed the rated voltage.								
	Capacitance Change	≤±30% of the initial value					Size(mm)		Load life (hours)
	D.F. (tanδ)	≤300% of the initial specified value					6.3×9 6.3×12 8×9 10×9	12,000	
	Leakage Current	≤The initial specified value					8×12 8×16 8×20 10×12	15,000	
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after leaving them under no load at 105°C for 1,000 hours.								
	Capacitance Change	≤±20% of the initial value					≥10×16		20,000
	D.F. (tanδ)	≤200% of the initial specified value							
	Leakage Current	≤200% of the initial specified value							

DIMENSIONS[mm]

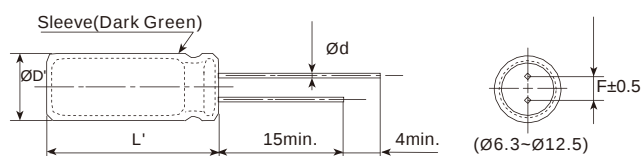

ØD	6.3	8	10	12.5
Ød	0.5	0.5	0.6	0.6
F	2.5	3.5	5.0	5.0
ØD'	ØD+0.5max.			
L'	L+2max.			

PART NUMBERING SYSTEM

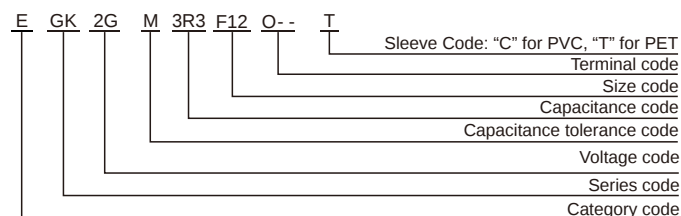

RATED RIPPLE CURRENT MULTIPLIERS

Frequency correction factor for ripple current

Freq.(Hz)	120	1k	10k	100k
Rated voltage(V _{dc})				
160~450	0.50	0.80	0.90	1.00

CD11GK series

■ STANDARD RATINGS (Rated ripple current:mArms/105°C 100kHz)

WV (V _{dc})	Cap (μF)	Size ΦD×L(mm)	Rated ripple current	Part Number
160(2C)	1	6.3×9	50	EGK2CM010E09OT
	1.5	6.3×9	62	EGK2CM1R5E09OT
	1.8	6.3×9	72	EGK2CM1R8E09OT
	2.2	6.3×9	76	EGK2CM2R2E09OT
	2.8	6.3×12	80	EGK2CM2R8E12OT
	3.3	6.3×12	92	EGK2CM3R3E12OT
	4.7	6.3×12	104	EGK2CM4R7E12OT
	5.6	6.3×12	110	EGK2CM5R6E12OT
	6.8	6.3×12	124	EGK2CM6R8E12OT
	8.2	8×9	135	EGK2CM8R2F09OT
	10	8×9	150	EGK2CM100F09OT
	15	8×12	190	EGK2CM150F12OT
		10×9	210	EGK2CM150G09OT
	22	10×12	250	EGK2CM220G12OT
	33	10×16	412	EGK2CM330G16OT
	47	10×20	525	EGK2CM470G20OT
200(2D)	1	6.3×9	52	EGK2DM010E09OT
	1.5	6.3×9	60	EGK2DM1R5E09OT
	1.8	6.3×9	64	EGK2DM1R8E09OT
	2.2	6.3×12	72	EGK2DM2R2E12OT
	2.8	6.3×12	84	EGK2DM2R8E12OT
	3.3	6.3×12	88	EGK2DM3R3E12OT
	4.7	6.3×12	102	EGK2DM4R7E12OT
	5.6	8×9	116	EGK2DM5R6F09OT
	6.8	8×9	128	EGK2DM6R8F09OT
	8.2	8×9	144	EGK2DM8R2F09OT
	10	8×12	160	EGK2DM100F12OT
	12	10×9	180	EGK2DM120G09OT
	15	8×16	240	EGK2DM150F16OT
		10×12	280	EGK2DM150G12OT
	22	10×16	340	EGK2DM220G16OT
	33	10×20	550	EGK2DM330G20OT
	47	12.5×20	750	EGK2DM470W20OT
250(2E)	1	6.3×9	52	EGK2EM010E09OT
	1.5	6.3×9	60	EGK2EM1R5E09OT
	1.8	6.3×12	64	EGK2EM1R8E12OT
	2.2	6.3×12	72	EGK2EM2R2E12OT
	2.8	6.3×12	88	EGK2EM2R8E12OT
	3.3	6.3×12	92	EGK2EM3R3E12OT
	4.7	6.3×12	120	EGK2EM4R7E12OT
		8×9	125	EGK2EM4R7F09OT
	5.6	8×9	132	EGK2EM5R6F09OT
	6.8	8×9	160	EGK2EM6R8F09OT
	8.2	8×9	172	EGK2EM8R2F09OT
	10	8×12	200	EGK2EM100F12OT
	15	10×12	270	EGK2EM150G12OT
	22	10×16	370	EGK2EM220G16OT
	33	10×20	562	EGK2EM330G20OT
	47	12.5×20	788	EGK2EM470W20OT

WV (V _{dc})	Cap (μF)	Size ΦD×L(mm)	Rated ripple current	Part Number
350(2V)	1	6.3×9	56	EGK2VM010E09OT
	1.5	6.3×12	66	EGK2VM1R5E12OT
	1.8	6.3×12	72	EGK2VM1R8E12OT
	2.2	8×9	80	EGK2VM2R2F09OT
		8×12	85	EGK2VM2R2F12OT
	2.8	8×12	92	EGK2VM2R8F12OT
		8×12	100	EGK2VM3R3F12OT
	3.3	10×9	120	EGK2VM3R3G09OT
	4.7	8×12	128	EGK2VM4R7F12OT
	5.6	8×16	136	EGK2VM5R6F16OT
	6.8	10×12	168	EGK2VM6R8G12OT
	8.2	10×16	180	EGK2VM8R2G16OT
	10	10×16	210	EGK2VM100G16OT
	15	10×20	290	EGK2VM150G20OT
400(2G)	1	6.3×12	54	EGK2GM010E12OT
	1.2	8×9	60	EGK2GM1R2F09OT
	1.5	8×9	66	EGK2GM1R5F09OT
	1.8	8×9	72	EGK2GM1R8F09OT
	2.2	8×9	76	EGK2GM2R2F09OT
		8×12	82	EGK2GM2R2F12OT
	2.8	8×12	88	EGK2GM2R8F12OT
	3.3	8×12	100	EGK2GM3R3F12OT
		10×9	110	EGK2GM3R3G09OT
	4.7	10×12	126	EGK2GM4R7G12OT
	5.6	8×20	156	EGK2GM5R6F20OT
		10×12	158	EGK2GM5R6G12OT
	6.8	8×20	170	EGK2GM6R8F20OT
		10×16	180	EGK2GM6R8G16OT
	8.2	10×16	190	EGK2GM8R2G16OT
	10	10×16	224	EGK2GM100G16OT
	15	12.5×20	300	EGK2GM150W20OT
450(2W)	1	6.3×12	54	EGK2WM010E12OT
	1.5	8×12	70	EGK2WM1R5F12OT
	1.8	8×12	80	EGK2WM1R8F12OT
	2.2	8×12	88	EGK2WM2R2F12OT
	2.8	8×16	100	EGK2WM2R8F16OT
	3.3	8×16	110	EGK2WM3R3F16OT
	4.7	10×12	140	EGK2WM4R7G12OT
	5.6	10×16	180	EGK2WM5R6G16OT
	6.8	10×16	200	EGK2WM6R8G16OT
	8.2	10×20	238	EGK2WM8R2G20OT
	10	10×20	284	EGK2WM100G20OT