



SGM8965A-1/SGM8965A-2

50MHz, Low Distortion, Rail-to-Rail I/O, Single-Supply Operational Amplifiers

GENERAL DESCRIPTION

The SGM8965A-1 (single), SGM8965A-2 (dual) are rail-to-rail operational amplifiers, which are optimized for high input impedance, zero-crossover, low voltage operation. These devices can operate from 2.2V to 5.5V single supply.

The single SGM8965A-1 and dual SGM8965A-2 are high speed CMOS operational amplifiers with high input impedance, zero-crossover and low distortion. These devices can operate from 2.2V to 5.5V single supply.

The SGM8965A-1/2 feature high speed and low noise. These devices support rail-to-rail input and output operation. They have a wide input common mode voltage range and output swing within 6mV. Furthermore, the SGM8965A-1/2 provide high CMRR with zero-crossover and low distortion, which are designed to drive ADCs with high linearity. They can be used in a variety of applications.

The SGM8965A-1 is available in Green SOT-23-5 and SOIC-8 packages. The SGM8965A-2 is available in Green SOIC-8 and MSOP-8 packages. They are specified over the extended -40 °C to +125 °C temperature range.

FEATURES

- **Gain-Bandwidth Product:** 50MHz
- **Slew Rate:** 30V/μs
- **Unity-Gain Stable**
- **High CMRR:** 94dB (TYP)
- **Low Offset Voltage:** 50μV (TYP), 280μV (MAX)
- **Low Bias Current:** 1pA (TYP)
- **Low Input Voltage Noise:** 5.5nV/√Hz at 100kHz
- **Rail-to-Rail Input and Output**
- **Supply Voltage Range:** 2.2V to 5.5V
- **-40°C to +125°C Operating Temperature Range**
- **Small Packaging:**
 - SGM8965A-1 Available in Green SOT-23-5 and SOIC-8 Packages
 - SGM8965A-2 Available in Green SOIC-8 and MSOP-8 Packages

APPLICATIONS

Audio
Active Filter
Signal Conditioning
Sensor Amplification
Data Acquisition
Process Control
Test Equipment
Wideband Amplifier

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM8965A-1	SOT-23-5	-40°C to +125°C	SGM8965A-1XN5G/TR	MLEXX	Tape and Reel, 3000
	SOIC-8	-40°C to +125°C	SGM8965A-1XS8G/TR	SGM MLCXS8 XXXXX	Tape and Reel, 4000
SGM8965A-2	SOIC-8	-40°C to +125°C	SGM8965A-2XS8G/TR	SGM MLBXS8 XXXXX	Tape and Reel, 4000
	MSOP-8	-40°C to +125°C	SGM8965A-2XMS8G/TR	SGMMLD XMS8 XXXXX	Tape and Reel, 4000

MARKING INFORMATION

NOTE: XX = Date Code. XXXXX = Date Code, Trace Code and Vendor Code.

SOT-23-5

YYY X X
 └──┬──┬──
 Date Code - Week
 Date Code - Year
 Serial Number

SOIC-8/MSOP-8

XXXXX
 └──┬──┬──┬──
 Vendor Code
 Trace Code
 Date Code - Year

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

Supply Voltage.....6V
 Input Voltage Range.....(-V_S) - 0.3V to (+V_S) + 0.3V
 Input Current (All pins except power supply pins).....±10mA
 Output Short-Circuit.....Continuous
 Junction Temperature.....+150°C
 Storage Temperature Range.....-65°C to +150°C
 Lead Temperature (Soldering, 10s).....+260°C
 ESD Susceptibility
 HBM (SGM8265A-1).....5000V
 HBM (SGM8265A-2).....7000V
 CDM.....2000V

RECOMMENDED OPERATING CONDITIONS

Supply Voltage Range.....2.2V to 5.5V
 Operating Temperature Range.....-40°C to +125°C

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

ESD SENSITIVITY CAUTION


This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.


PIN CONFIGURATIONS

SGM8965A-1 (TOP VIEW)

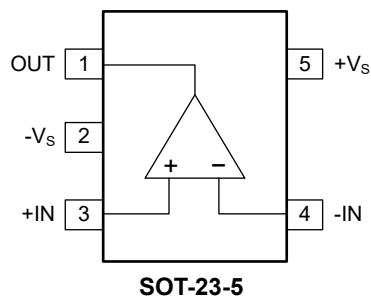


SOT-23-5

SGM8965A-1 (TOP VIEW)

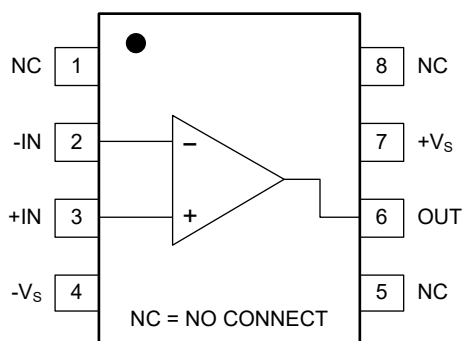

SOIC-8

SGM8965A-2 (TOP VIEW)

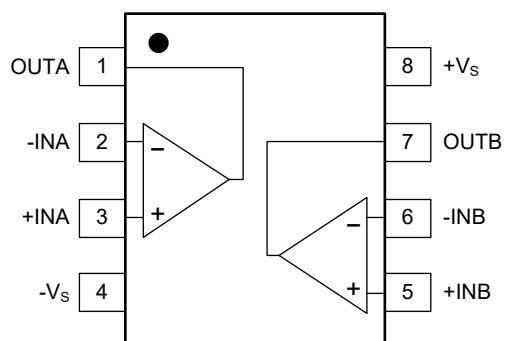

SOIC-8/MSOP-8







ELECTRICAL CHARACTERISTICS

(At $T_A = +25^\circ\text{C}$, $V_S = 2.2\text{V}$ to 5.5V , $V_{CM} = V_S/2$, $V_{OUT} = V_S/2$ and $R_L = 10\text{k}\Omega$ connected to $V_S/2$, Full = -40°C to $+125^\circ\text{C}$, unless otherwise noted.)

PARAMETER	CONDITIONS	TEMP	MIN	TYP	MAX	UNITS
Input Characteristics						
Input Offset Voltage (V _{OS})		+25°C		50	280	μV
		Full			1000	
Input Offset Voltage Drift (ΔV _{OS} /ΔT)		Full		1.4		μV/°C
Input Bias Current (I _B)		Full		1	2800	pA
Input Offset Current (I _{OS})		Full		1	180	pA
Input Common Mode Voltage Range (V _{CM})		Full	(-V _S) - 0.1		(+V _S) + 0.1	V
Common Mode Rejection Ratio (CMRR)	(-V _S) - 0.1V ≤ V _{CM} ≤ (+V _S) + 0.1V	+25°C	77	94		dB
		Full	68			
Open-Loop Voltage Gain (A _{OL})	R _L = 600Ω, 200mV < V _{OUT} < (+V _S) - 200mV	+25°C	91	118		dB
		Full	88			
	R _L = 10kΩ, 100mV < V _{OUT} < (+V _S) - 100mV	+25°C	92	118		
		Full	89			
Output Characteristics						
Output Voltage Swing from Rail	R _L = 10kΩ, V _S = 5.5V	Full		6	12	mV
Output Short-Circuit Current (I _{SC})	V _S = 5.5V	+25°C		85		mA
Open-Loop Output Impedance	f = 1MHz, I _{OUT} = 0	+25°C		30		Ω
Power Supply						
Specified Voltage Range (V _S)		Full	2.2		5.5	V
Quiescent Current/Amplifier (I _Q)	I _{OUT} = 0A	+25°C		5	6.5	mA
		Full			6.7	
Power Supply Rejection Ratio (PSRR)		Full		4	70	μV/V
Dynamic Performance						
Gain-Bandwidth Product (GBP)	R _L = 10kΩ, C _L = 10pF	+25°C		50		MHz
Phase Margin (φ _O)	R _L = 10kΩ, C _L = 10pF	+25°C		55		°
Slew Rate (SR)	G = +1	+25°C		30		V/μs
Settling Time to 0.1%	4V step, G = -1	+25°C		380		ns
Settling Time to 0.01%	4V step, G = -1	+25°C		650		ns
Overload Recovery Time	V _{IN} × G > V _S	+25°C		< 0.1		μs
Total Harmonic Distortion + Noise (THD+N)	R _L = 600Ω, V _{OUT} = 4V _{P-P} , G = +1, f = 1kHz	+25°C		0.00018		%
Noise						
Input Voltage Noise	f = 0.1Hz to 10Hz	+25°C		9		μV _{P-P}
Input Voltage Noise Density (e _n)	f = 100kHz	+25°C		5.5		nV/√Hz
Input Current Noise Density (i _n)	f = 10kHz	+25°C		20		fA/√Hz







TYPICAL PERFORMANCE CHARACTERISTICS

At $T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, $R_L = 10\text{k}\Omega$ and $C_L = 10\text{pF}$, unless otherwise noted.

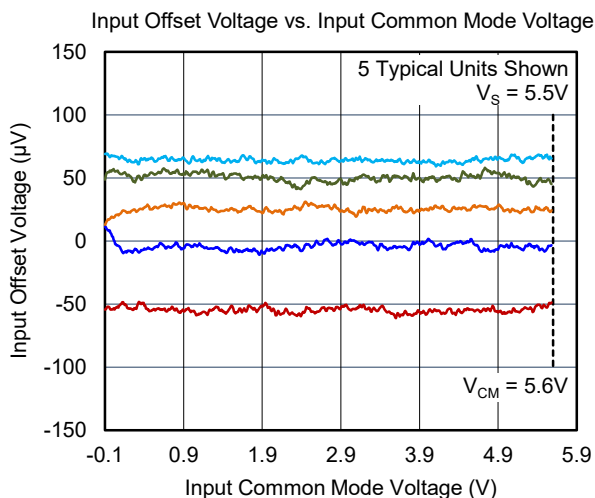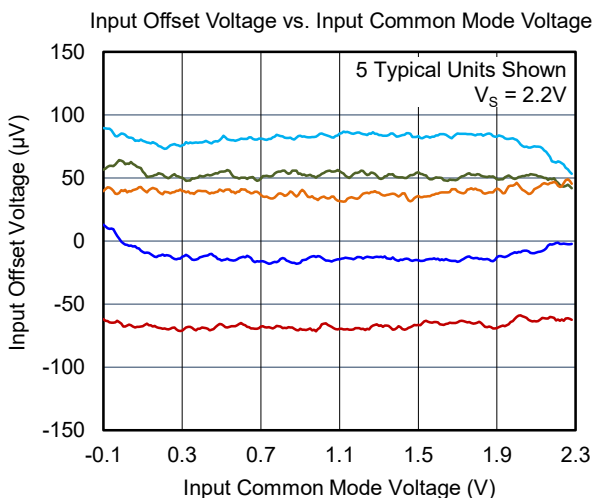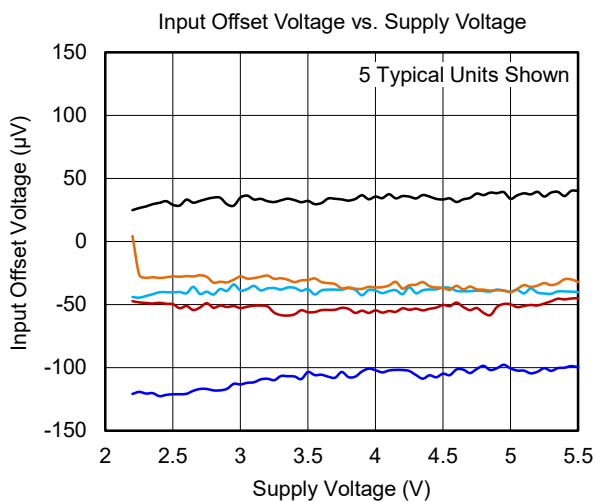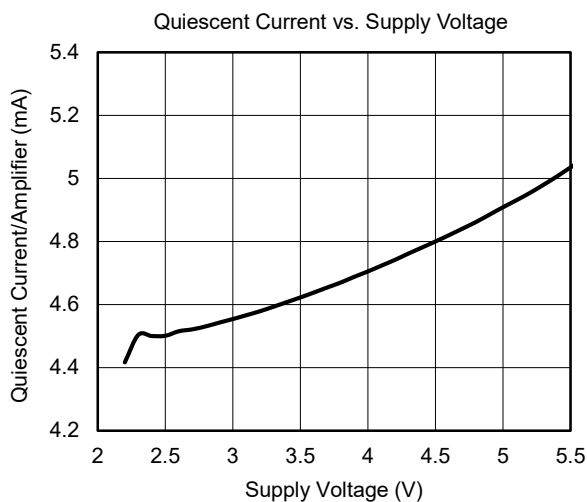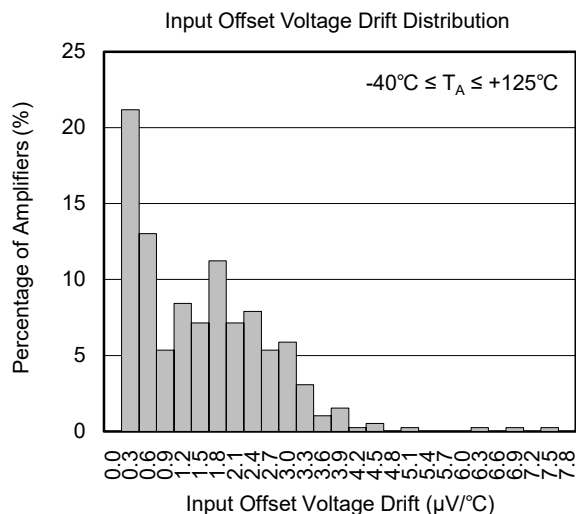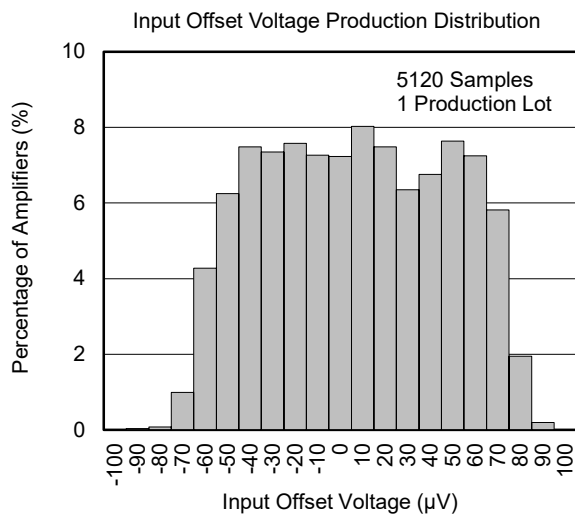

TYPICAL PERFORMANCE CHARACTERISTICS (continued)


At $T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, $R_L = 10\text{k}\Omega$ and $C_L = 10\text{pF}$, unless otherwise noted.

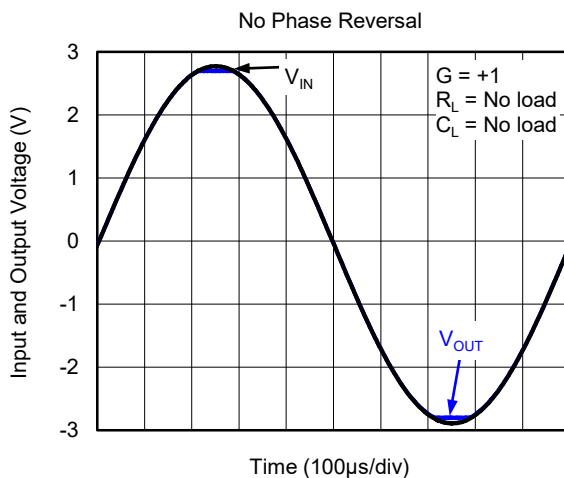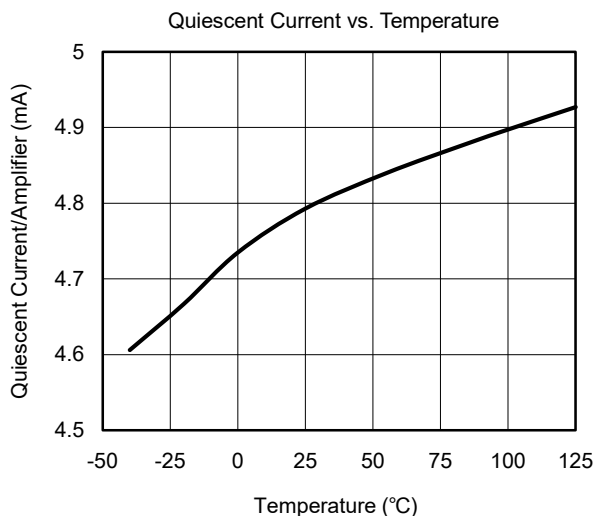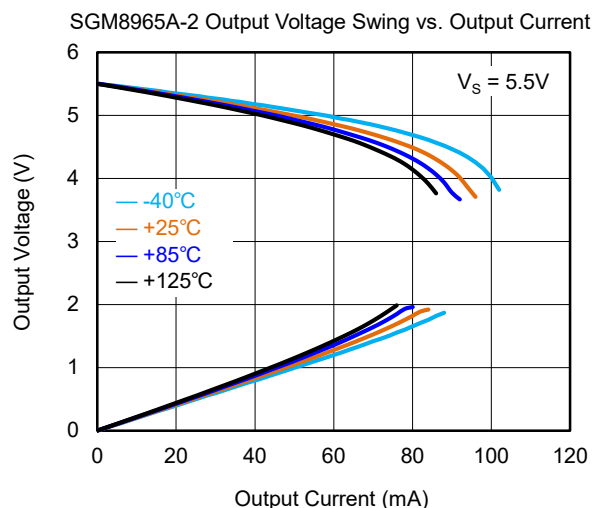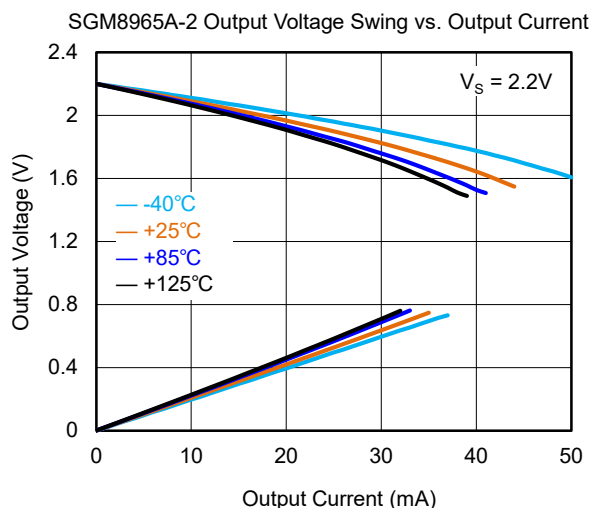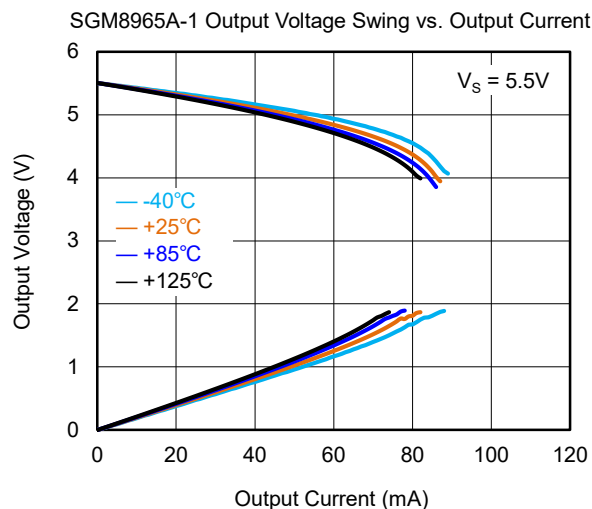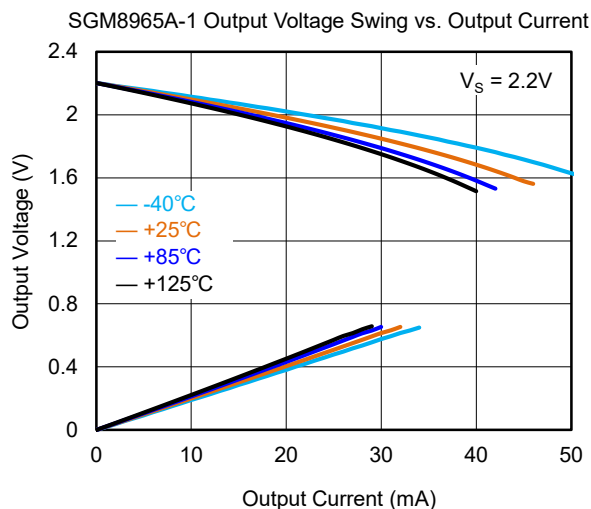


TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At $T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, $R_L = 10\text{k}\Omega$ and $C_L = 10\text{pF}$, unless otherwise noted.


Small-Signal Step Response

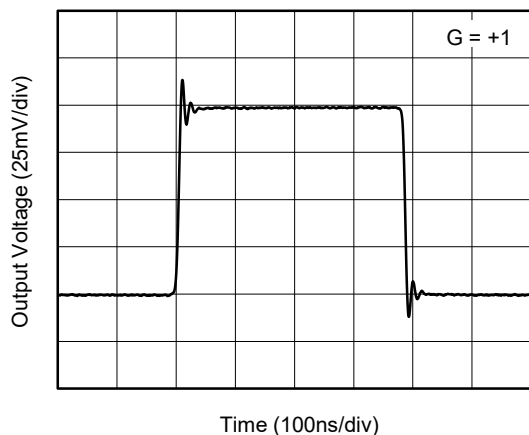


Large-Signal Step Response

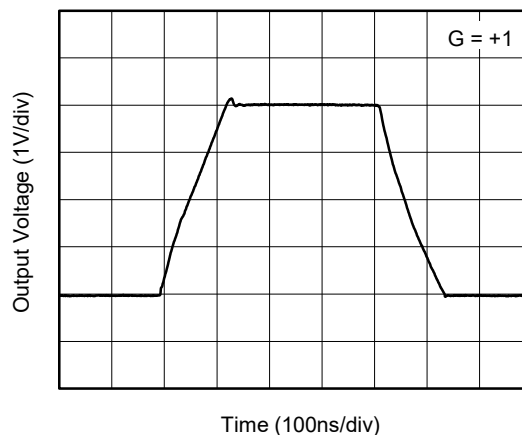


Positive Overload Recovery

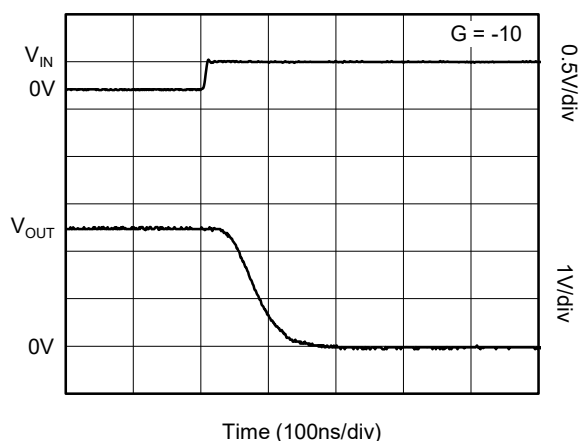


Negative Overload Recovery

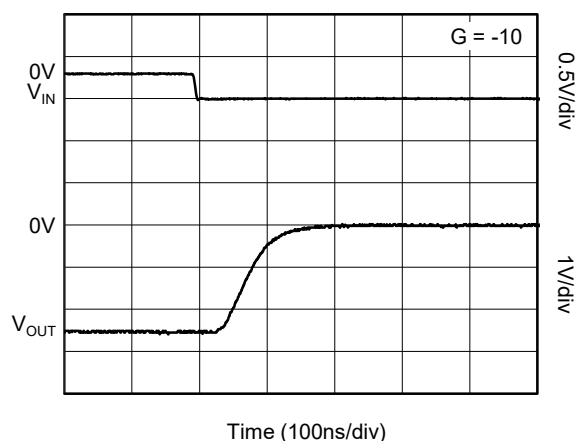

0.1Hz to 10Hz Input Voltage Noise






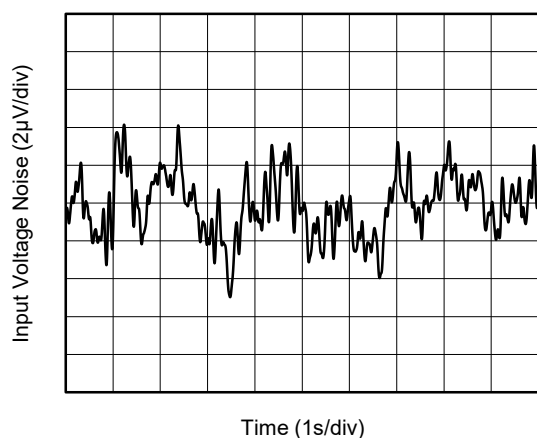


Input Voltage Noise Density vs. Frequency

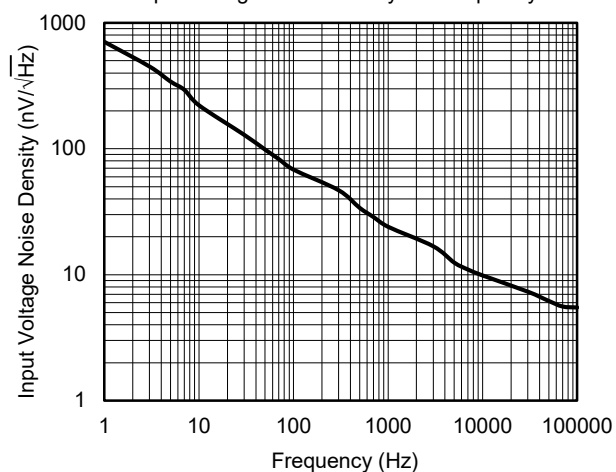



TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At $T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, $R_L = 10\text{k}\Omega$ and $C_L = 10\text{pF}$, unless otherwise noted.

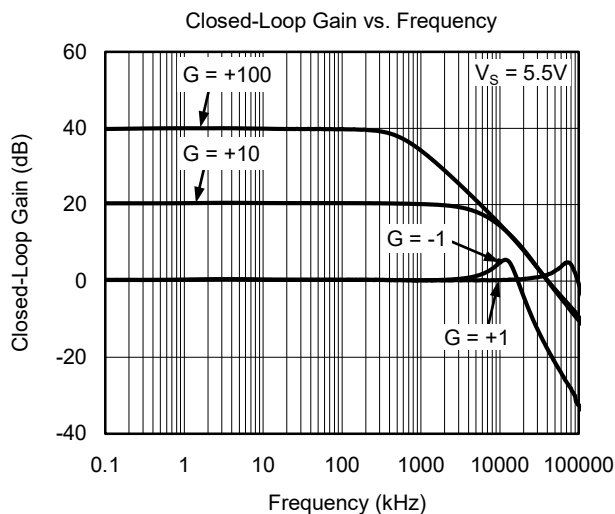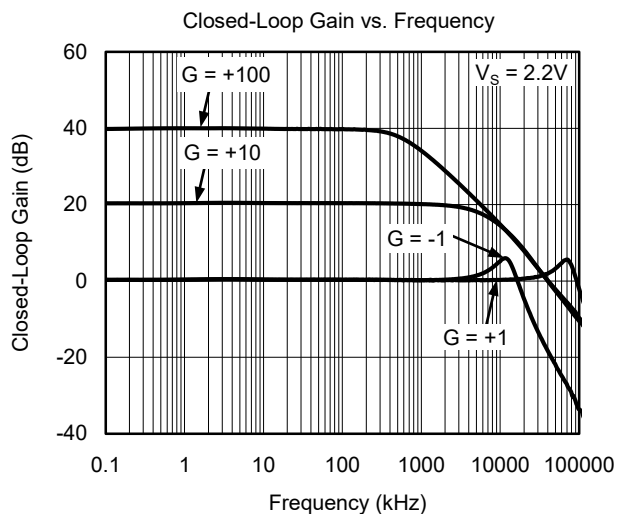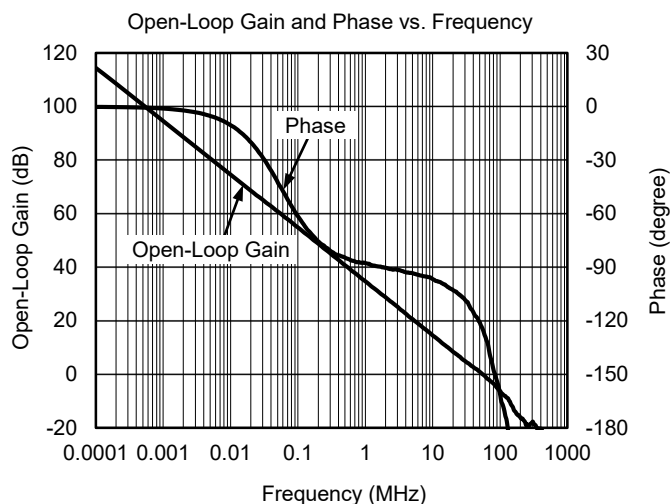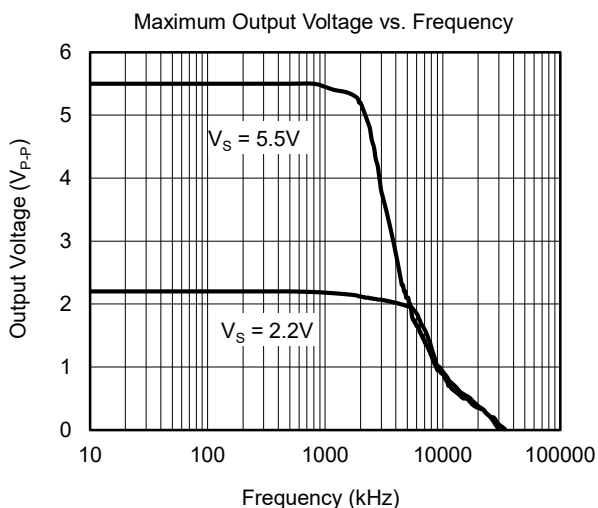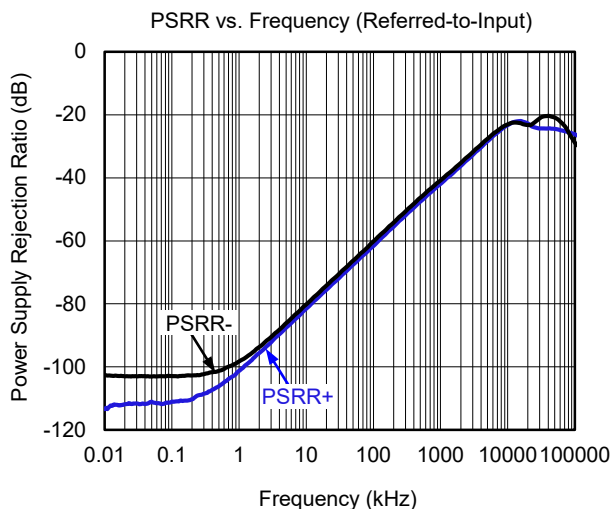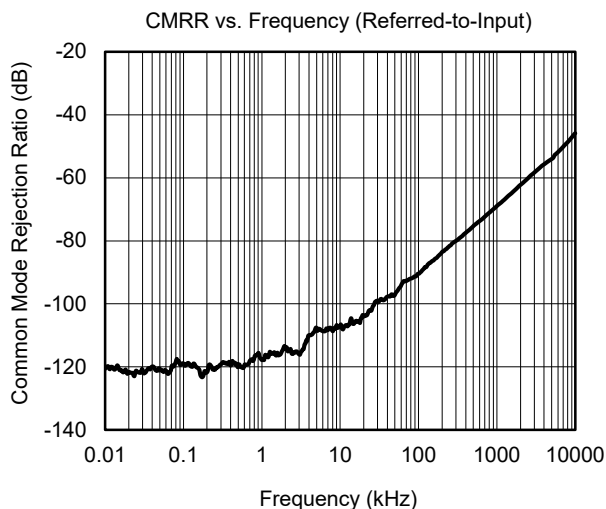

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At $T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, $R_L = 10\text{k}\Omega$ and $C_L = 10\text{pF}$, unless otherwise noted.

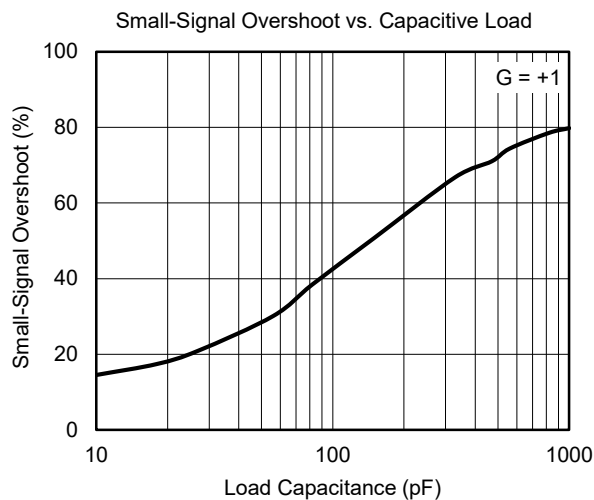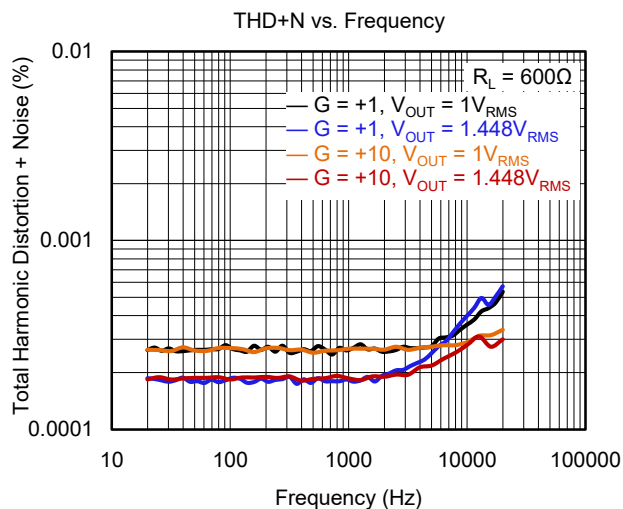



REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.



OCTOBER 2020 – REV.A to REV.A.1	Page
Updated Electrical Characteristics section	4
Changes from Original (JULY 2019) to REV.A	Page
Changed from product preview to production data.....	All

PACKAGE OUTLINE DIMENSIONS

SOT-23-5

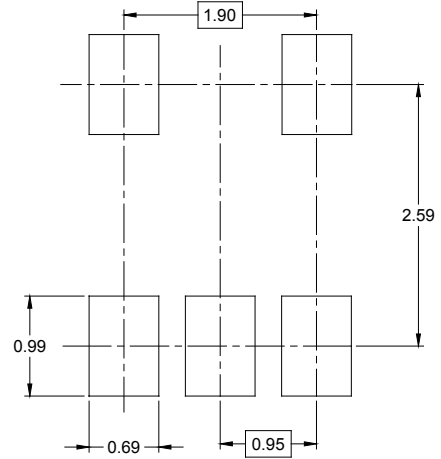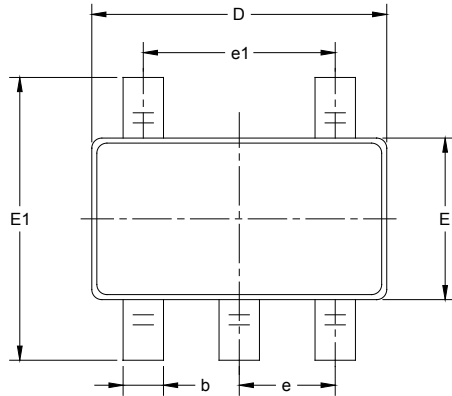


RECOMMENDED LAND PATTERN (Unit: mm)

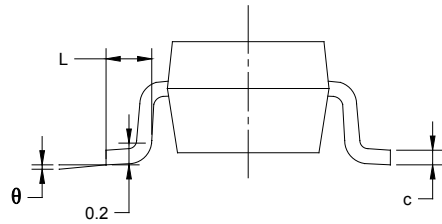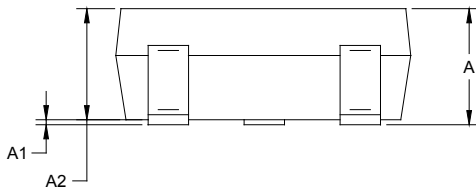

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 BSC		0.037 BSC	
e1	1.900 BSC		0.075 BSC	
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

PACKAGE OUTLINE DIMENSIONS


SOIC-8

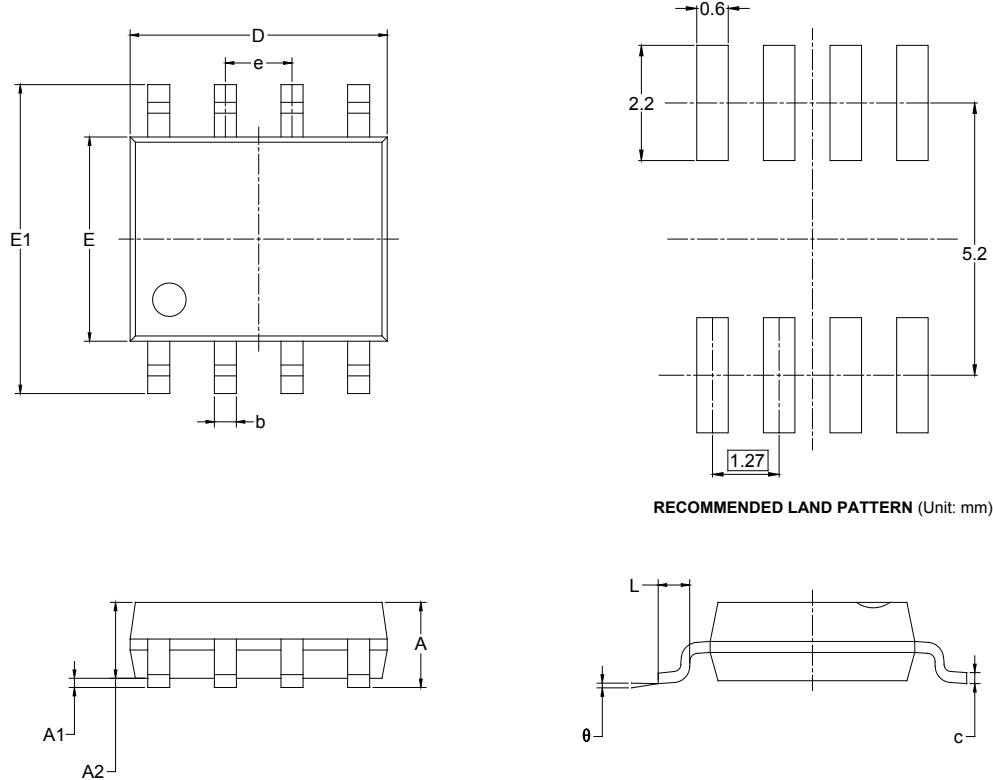


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.27 BSC		0.050 BSC	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

PACKAGE OUTLINE DIMENSIONS

MSOP-8

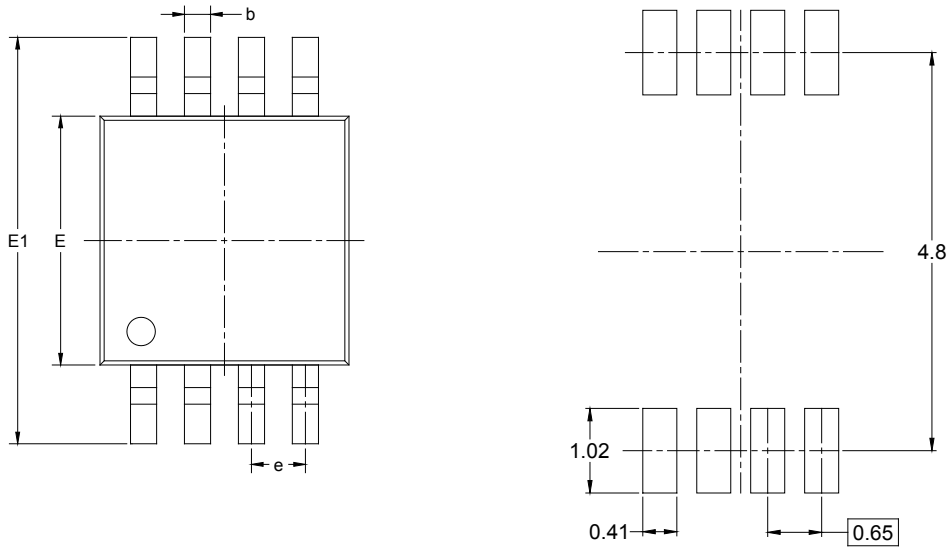

RECOMMENDED LAND PATTERN (Unit: mm)

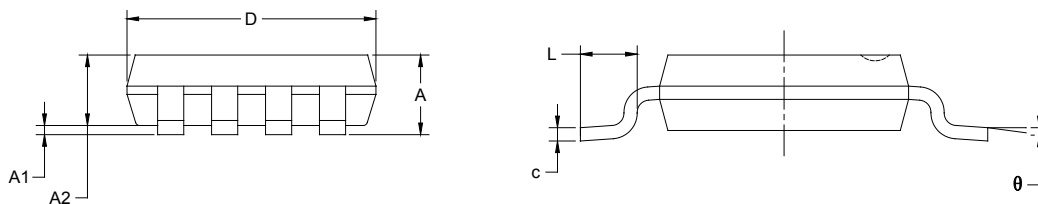


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.820	1.100	0.032	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.250	0.380	0.010	0.015
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
E	2.900	3.100	0.114	0.122
E1	4.750	5.050	0.187	0.199
e	0.650 BSC		0.026 BSC	
L	0.400	0.800	0.016	0.031
θ	0°	6°	0°	6°


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

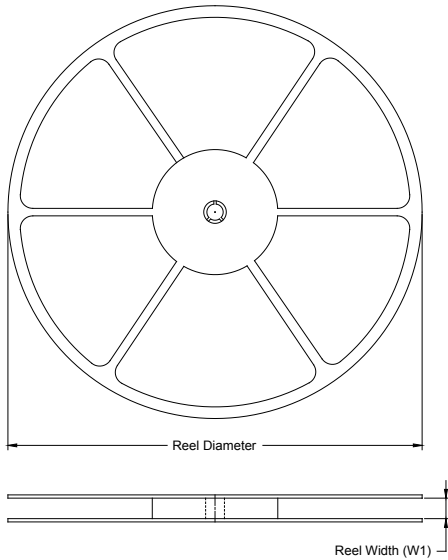

TAPE DIMENSIONS

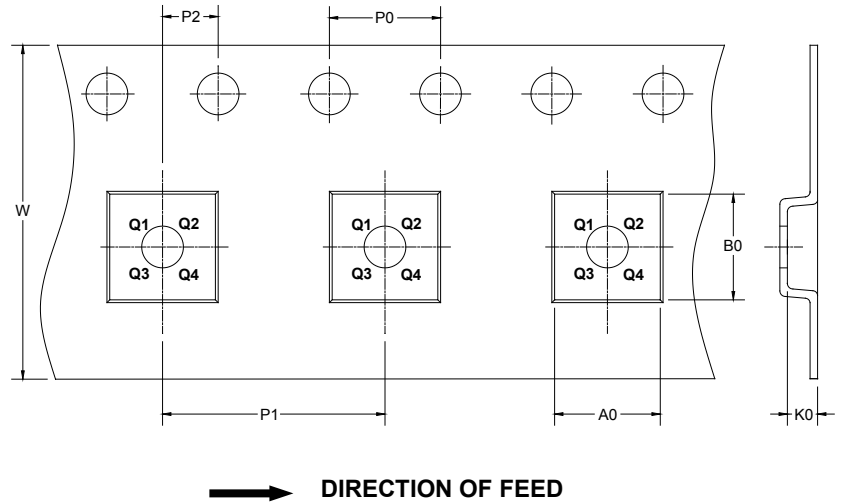

NOTE: The picture is only for reference. Please make the object as the standard.


KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOT-23-5	7"	9.5	3.20	3.20	1.40	4.0	4.0	2.0	8.0	Q3
SOIC-8	13"	12.4	6.40	5.40	2.10	4.0	8.0	2.0	12.0	Q1
MSOP-8	13"	12.4	5.20	3.30	1.50	4.0	8.0	2.0	12.0	Q1

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS

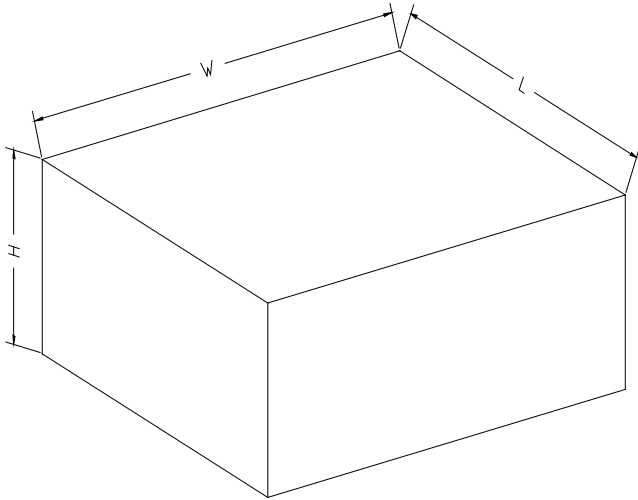

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18
13"	386	280	370	5

DD00002