



SGM8941/SGM8942

1.5MHz, Rail-to-Rail Input and Output Operational Amplifiers

GENERAL DESCRIPTION

The single SGM8941 and dual SGM8942 are high performance CMOS operational amplifiers optimized for low voltage operation. These devices operate from 1.8V to 5.5V single supply, consuming low quiescent current. They provide rail-to-rail input and output operation.

The SGM8941/2 offer impressive overall performance. They feature low offset, excellent CMRR and high linearity. These devices work well in low voltage and high quality systems, such as sensor amplification and sensor conditioning.

The SGM8941 is available in Green SOT-23-5 and SOIC-8 packages. The SGM8942 is available in Green SOIC-8 and MSOP-8 packages. They are specified over the extended -40°C to +85°C temperature range.

FEATURES

- **Low Input Offset Voltage:** 0.15mV (TYP)
- **Low Input Voltage Noise:** 38nV/ $\sqrt{\text{Hz}}$
- **Gain-Bandwidth Product:** 1.5MHz
- **Slew Rate:** 0.8V/ μs
- **Rail-to-Rail Input and Output**
- **Supply Voltage Range:** 1.8V to 5.5V
- **Low Supply Current:** 120 μA /Amplifier (TYP)
- **-40°C to +85°C Operating Temperature Range**
- **Small Packaging:**
 - SGM8941 Available in SOT-23-5 and SOIC-8 Packages
 - SGM8942 Available in MSOP-8 and SOIC-8 Packages

APPLICATIONS

Data Acquisition
Process Control
Active Filter
Test Equipment
Mobile Phone
Audio Processing
Video Processing
Headphone Amplifier
Portable Equipment
Broadband Communication

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM8941	SOT-23-5	-40°C to +85°C	SGM8941YN5G/TR	SBCXX	Tape and Reel, 3000
	SOIC-8	-40°C to +85°C	SGM8941YS8G/TR	SGM 8941YS8 XXXXX	Tape and Reel, 2500
SGM8942	SOIC-8	-40°C to +85°C	SGM8942YS8G/TR	SGM 8942YS8 XXXXX	Tape and Reel, 2500
	MSOP-8	-40°C to +85°C	SGM8942YMS8G/TR	SGM8942 YMS8 XXXXX	Tape and Reel, 3000

MARKING INFORMATION

NOTE: XX = Date Code. XXXXX = Date Code and Vendor Code.

SOT-23-5

YYY X X

SOIC-8/MSOP-8

XXXXX

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

Supply Voltage, +V_S to -V_S6V
 Input Common Mode Voltage Range
 (-V_S) - 0.1V to (+V_S) + 0.1V
 Junction Temperature+150°C
 Storage Temperature Range-65°C to +150°C
 Lead Temperature (Soldering, 10s)+260°C
 ESD Susceptibility
 HBM.....8000V
 MM.....400V

RECOMMENDED OPERATING CONDITIONS

Operating Temperature Range-40°C to +85°C

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any

conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

ESD SENSITIVITY CAUTION


This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.


PIN CONFIGURATIONS

SGM8941 (TOP VIEW)

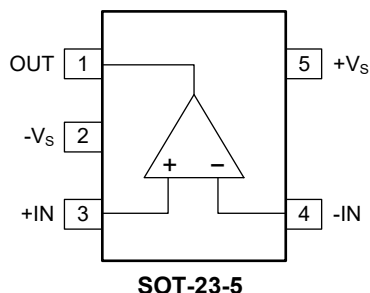


SOT-23-5

SGM8942 (TOP VIEW)

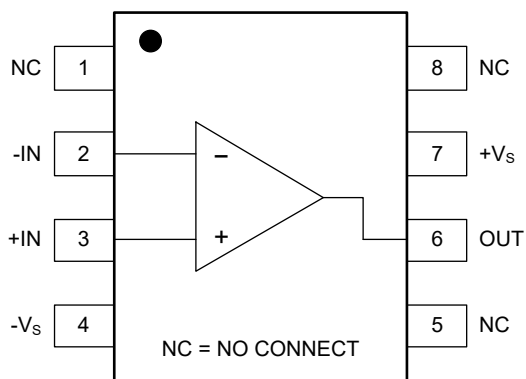

SOIC-8

SGM8942 (TOP VIEW)

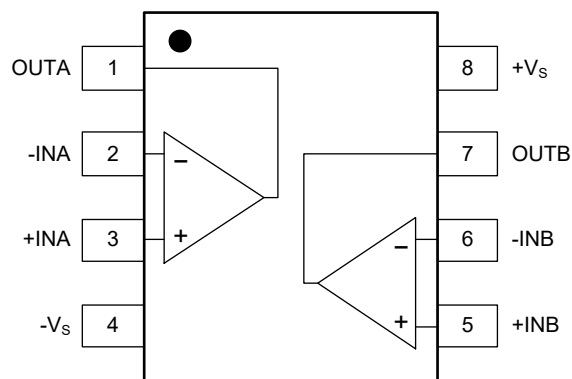

SOIC-8/MSOP-8

ELECTRICAL CHARACTERISTICS

(V_S = 5.0V, V_{OUT} = V_S/2, Full = -40°C to +85°C, typical values are at T_A = +25°C, unless otherwise noted.)

PARAMETER	CONDITIONS	TEMP	MIN	TYP	MAX	UNITS
DC Performance						
Input Offset Voltage (V _{OS})	V _{CM} = V _S /2	+25°C		0.15	0.9	mV
		Full			1.6	
Input Bias Current (I _B)		+25°C		3		pA
Input Offset Current (I _{OS})		+25°C		3		pA
Input Offset Voltage Drift	V _{CM} = V _S /2	Full		3		μV/°C
Open-Loop Voltage Gain (A _{OL})	R _L = 2kΩ, V _{OUT} = 0.2V to 4.8V	+25°C	79	88		dB
		Full	76			
	R _L = 10kΩ, V _{OUT} = 0.1V to 4.9V	+25°C	80	90		
		Full	77			
Input Characteristics						
Input Common Mode Voltage Range (V _{CM})		+25°C	-0.1		5.1	V
Common Mode Rejection Ratio (CMRR)	V _{CM} = -0.1V to 5.1V	+25°C	74	90		dB
		Full	71			
Output Characteristics						
Output Voltage Swing from Rail	R _L = 2kΩ	+25°C		75	90	mV
		Full			110	
	R _L = 10kΩ	+25°C		17	35	
		Full			55	
Output Short-Circuit Current (I _{SC})	R _L = 10Ω to V _S /2	+25°C	26.5	35.0		mA
		Full	19.0			
Power Supply						
Quiescent Current/Amplifier	I _{OUT} = 0mA	+25°C		120	178	μA
		Full			205	
Power Supply Rejection Ratio (PSRR)	V _S = 1.8V to 5.5V, V _{CM} = 0.5V	+25°C	77	85		dB
		Full	72			
Dynamic Performance ⁽¹⁾						
Gain-Bandwidth Product (GBP)	C _L = 100pF, R _L = 2kΩ	+25°C		1.5		MHz
Slew Rate (SR)	V _{OUT} = 2V _{P-P} , A _V = 1	+25°C		0.8		V/μs
Crosstalk	f = 1kHz	+25°C		110		dB
Settling Time to 0.1% (t _s)	V _{OUT} = 200mV _{P-P} , f = 1kHz, A _V = 1, C _L = 100pF, R _L = 2kΩ	+25°C		2		μs
Overload Recovery Time	R _L = 2kΩ, A _V = -50	+25°C		3.5		μs
Noise/Distortion Performance						
Input Voltage Noise (e _n)	f = 1kHz	+25°C		38		nV/√Hz

NOTE: 1. Power supply bypassing is an effective method to clear up the noise at power supply, and the low impedance path to ground of decoupling capacitor will bypass the noise to GND. A 10μF ceramic capacitor paralleled with a 0.1μF ceramic capacitor is used. The ceramic capacitors should be placed as close as possible to +V_S pin. A large ground plane is also needed to ensure optimum performance.







ELECTRICAL CHARACTERISTICS (continued)(V_S = 1.8V, V_{OUT} = V_S/2, Full = -40°C to +85°C, typical values are at T_A = +25°C, unless otherwise noted.)

PARAMETER	CONDITIONS	TEMP	MIN	TYP	MAX	UNITS
DC Performance						
Input Offset Voltage (V _{OS})	V _{CM} = V _S /2	+25°C		0.22	0.9	mV
		Full			1.55	
Input Bias Current (I _B)		+25°C		3		pA
Input Offset Current (I _{OS})		+25°C		3		pA
Input Offset Voltage Drift	V _{CM} = V _S /2	Full		3.4		μV/°C
Open-Loop Voltage Gain (A _{OL})	R _L = 2kΩ, V _{OUT} = 0.2V to 1.6V	+25°C	76	88		dB
		Full	73			
	R _L = 10kΩ, V _{OUT} = 0.1V to 1.7V	+25°C	83	105		
		Full	80			
Input Characteristics						
Input Common Mode Voltage Range (V _{CM})		+25°C	-0.1		1.9	V
Common Mode Rejection Ratio (CMRR)	V _{CM} = -0.1V to 1.9V	+25°C	69	85		dB
		Full	66			
Output Characteristics						
Output Voltage Swing from Rail	R _L = 2kΩ	+25°C		42	62	mV
		Full			72	
	R _L = 10kΩ	+25°C		9	25	
		Full			45	
Output Short-Circuit Current (I _{SC})	R _L = 10Ω to V _S /2	+25°C	2.0	5.0		mA
		Full	1.1			
Power Supply						
Quiescent Current/Amplifier	I _{OUT} = 0mA	+25°C		105	168	μA
		Full			200	
Dynamic Performance ⁽¹⁾						
Gain-Bandwidth Product (GBP)	C _L = 100pF, R _L = 2kΩ	+25°C		1.4		MHz
Slew Rate (SR)	V _{OUT} = 1V _{P-P} , A _V = 1	+25°C		0.8		V/μs
Crosstalk	f = 1kHz	+25°C		110		dB
Settling Time to 0.1% (t _s)	V _{OUT} = 200mV _{P-P} , f = 1kHz, A _V = 1, C _L = 100pF, R _L = 2kΩ	+25°C		2		μs
Overload Recovery Time	R _L = 2kΩ, A _V = -50	+25°C		2.5		μs
Noise/Distortion Performance						
Input Voltage Noise (e _n)	f = 1kHz	+25°C		36		nV/√Hz

NOTE: 1. Power supply bypassing is an effective method to clear up the noise at power supply, and the low impedance path to ground of decoupling capacitor will bypass the noise to GND. A 10μF ceramic capacitor paralleled with a 0.1μF ceramic capacitor is used. The ceramic capacitors should be placed as close as possible to +V_S pin. A large ground plane is also needed to ensure optimum performance.






TYPICAL PERFORMANCE CHARACTERISTICS

At $T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, unless otherwise noted.

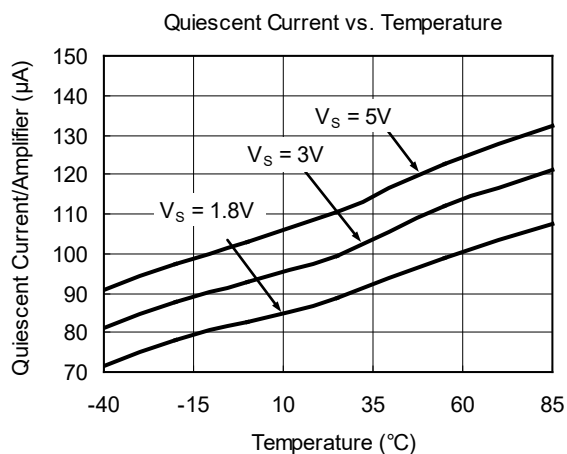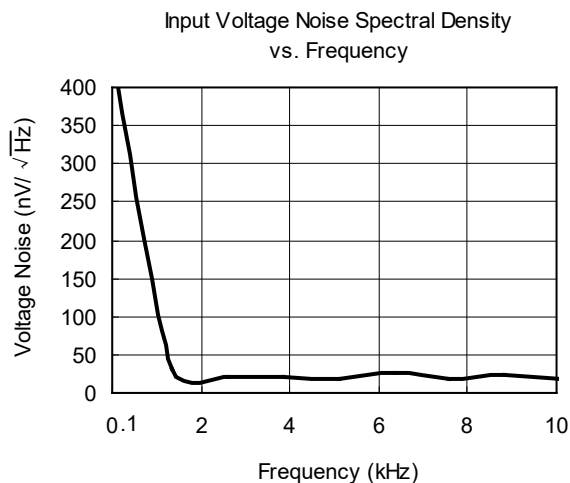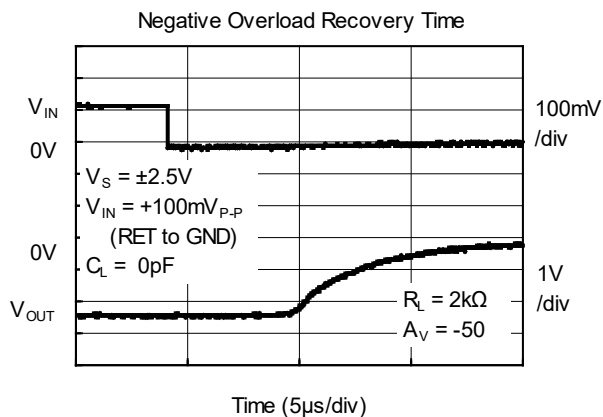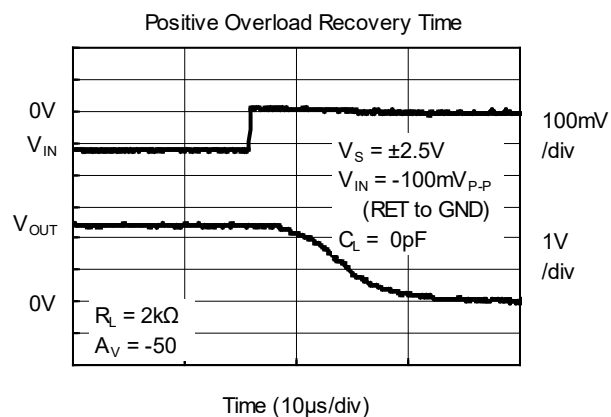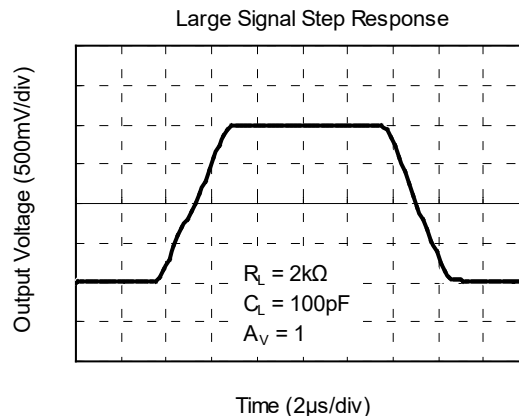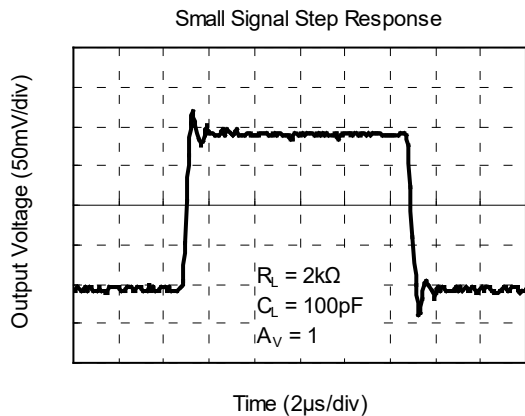

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At $T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, unless otherwise noted.

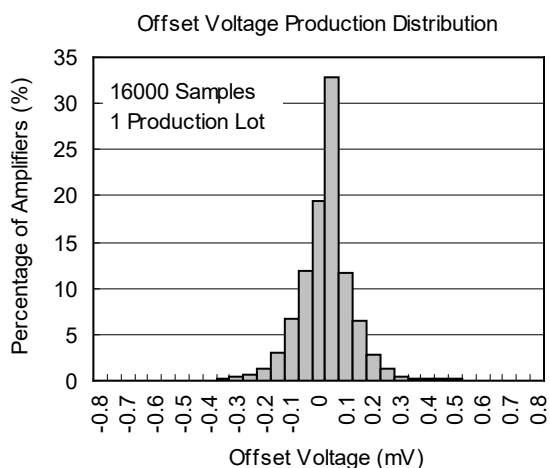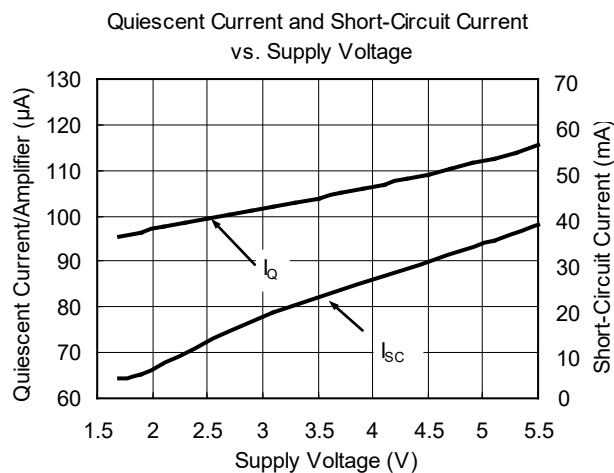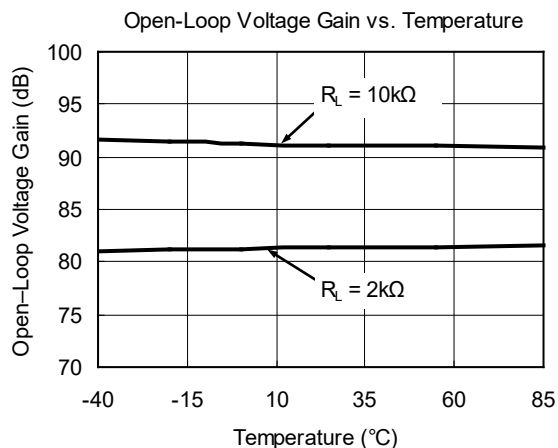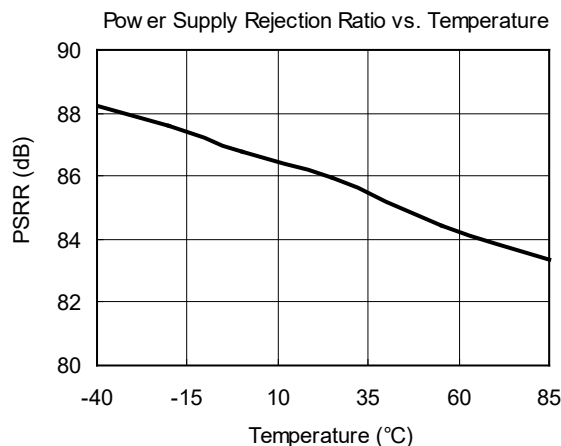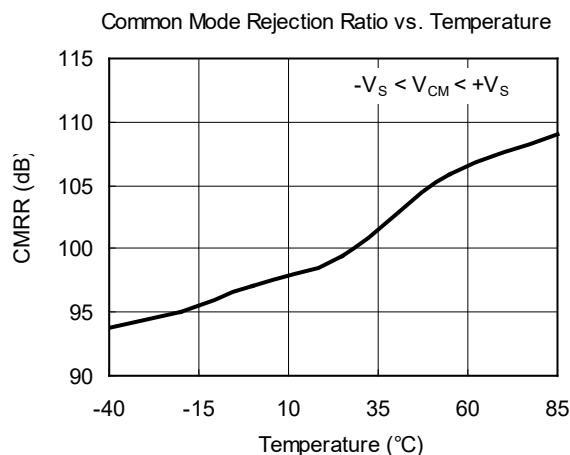

REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.



Changes from Original (AUGUST 2012) to REV.A

Page



Changed from product preview to production data.....	All
--	-----

PACKAGE OUTLINE DIMENSIONS

SOT-23-5

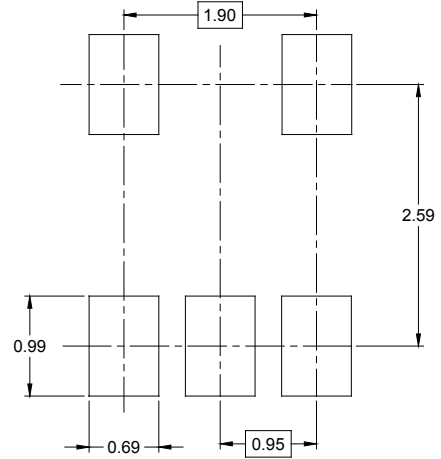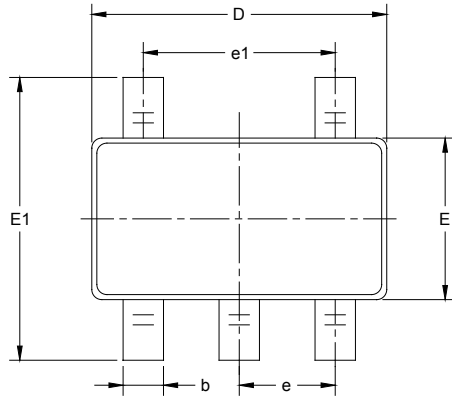


RECOMMENDED LAND PATTERN (Unit: mm)

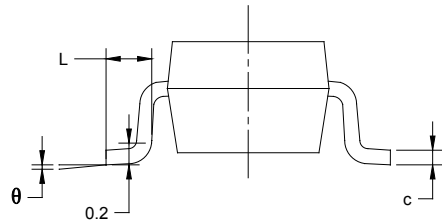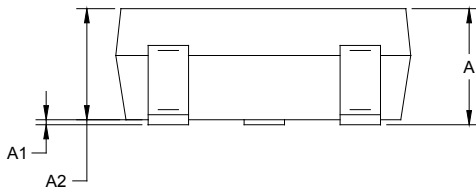

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 BSC		0.037 BSC	
e1	1.900 BSC		0.075 BSC	
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

PACKAGE OUTLINE DIMENSIONS


SOIC-8

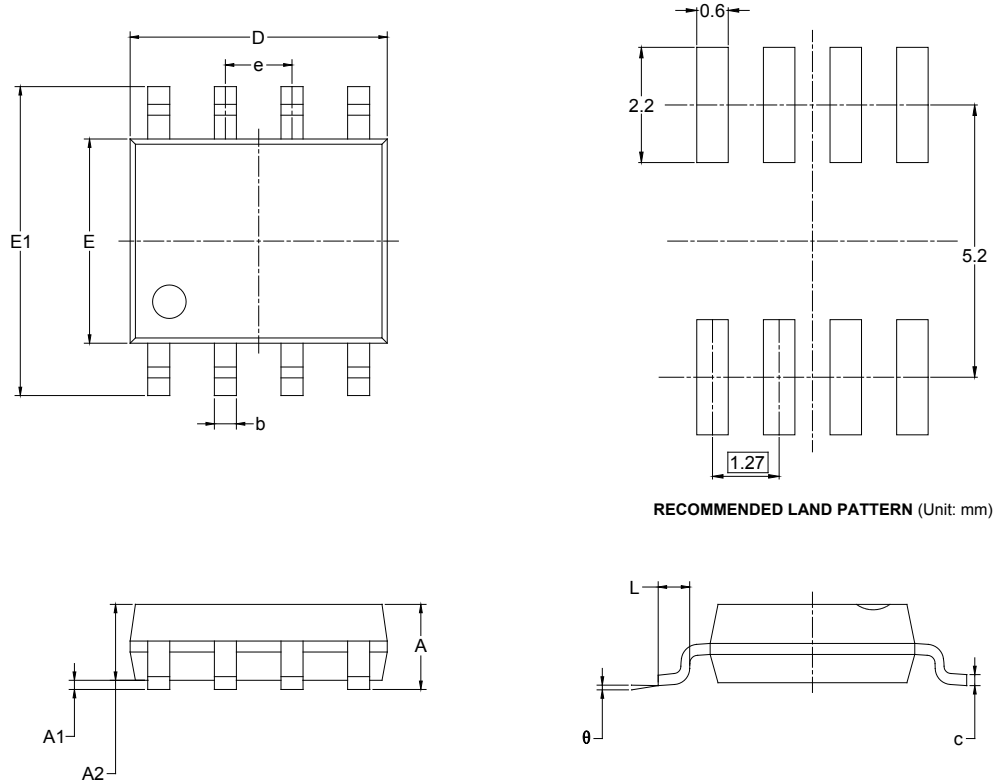


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.27 BSC		0.050 BSC	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

PACKAGE OUTLINE DIMENSIONS

MSOP-8

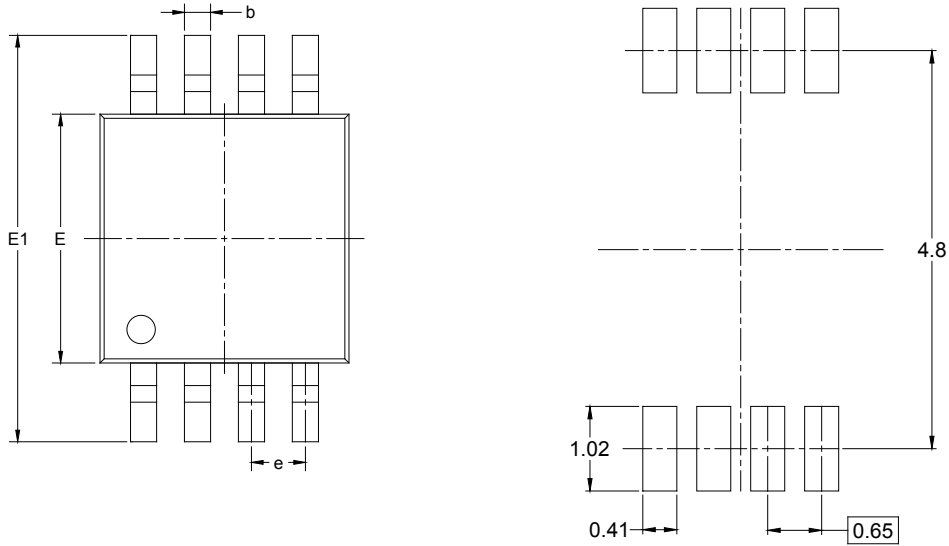

RECOMMENDED LAND PATTERN (Unit: mm)

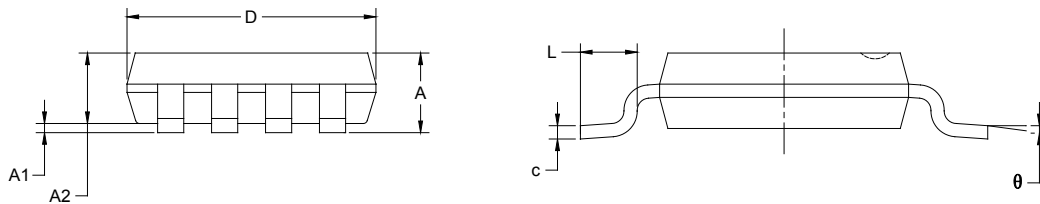


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.820	1.100	0.032	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.250	0.380	0.010	0.015
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
E	2.900	3.100	0.114	0.122
E1	4.750	5.050	0.187	0.199
e	0.650 BSC		0.026 BSC	
L	0.400	0.800	0.016	0.031
θ	0°	6°	0°	6°


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

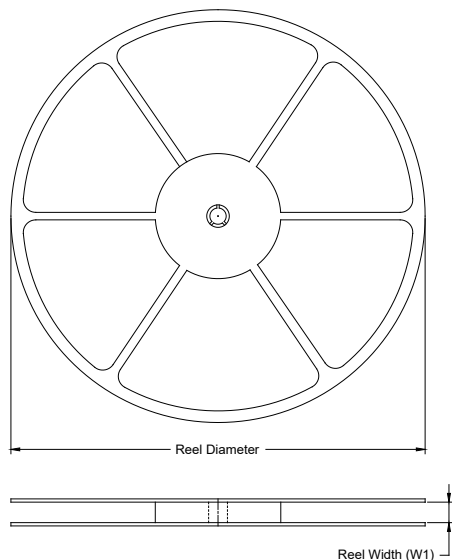

TAPE DIMENSIONS

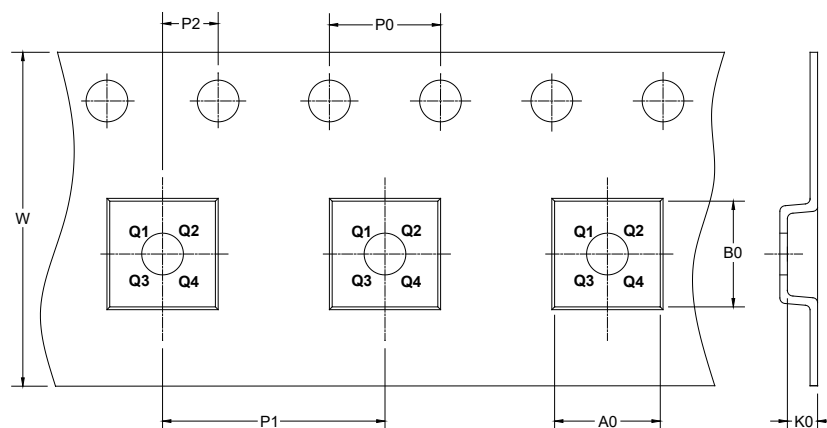

➔ DIRECTION OF FEED

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOT-23-5	7"	9.5	3.20	3.20	1.40	4.0	4.0	2.0	8.0	Q3
SOIC-8	13"	12.4	6.40	5.40	2.10	4.0	8.0	2.0	12.0	Q1
MSOP-8	13"	12.4	5.20	3.30	1.50	4.0	8.0	2.0	12.0	Q1

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18
13"	386	280	370	5

DD00002