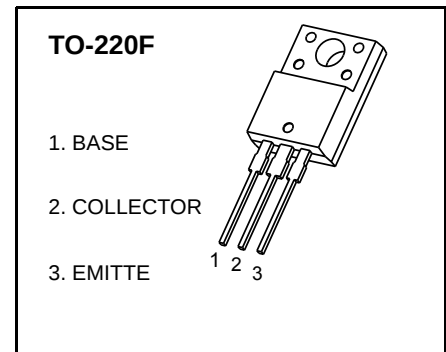
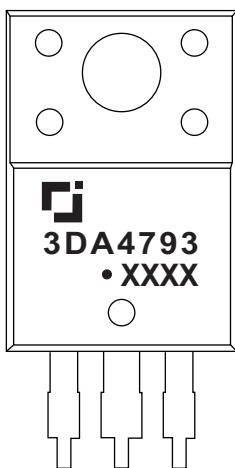



**TO-220F Plastic-Encapsulate Transistors****3DA4793** TRANSISTOR (NPN)**FEATURES**

- Complementary to 3CA1837
- Collector Power Dissipation
 $P_{CM} : 2W (T_a=25.)$
20 W ($T_c=25.)$

**MARKING**

3DA4793=Device code
Solid dot=Green moldinn compound device,
if none,the normal device
XXXX=Code








Equivalent Circuit**MAXIMUM RATINGS ($T_a=25^{\circ}C$ unless otherwise noted)**

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	230	V
V_{CEO}	Collector-Emitter Voltage	230	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current -Continuous	1000	mA
P_C	Collector Power Dissipation	1.5	W
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55-150	$^{\circ}C$


ELECTRICAL CHARACTERISTICS (T_a=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=0.1mA, I_E=0$	230			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=1mA, I_B=0$	230			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=100\mu A, I_C=0$	5			V
Collector cut-off current	I_{CBO}	$V_{CB}=230V, I_E=0$			10	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=5V, I_C=0$			10	μA
DC current gain	h_{FE}	$V_{CE}=5V, I_C=100mA$	100		320	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=500mA, I_B=50mA$			1.5	V
Transition frequency	f_T	$V_{CE}=10V, I_C=100mA$	30			MHz

Typical Characteristics

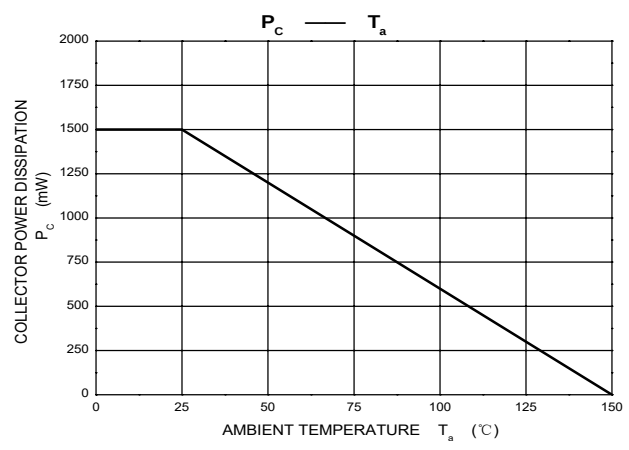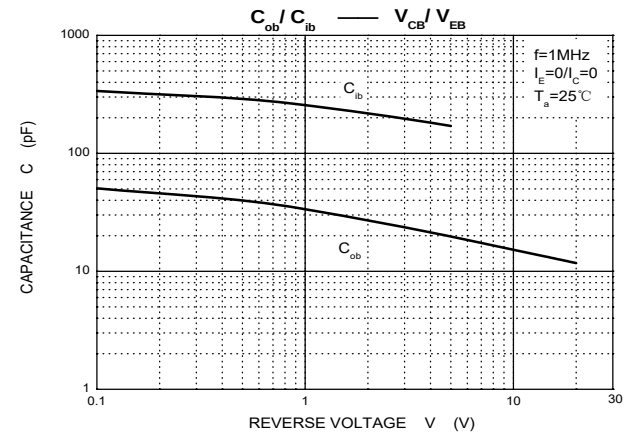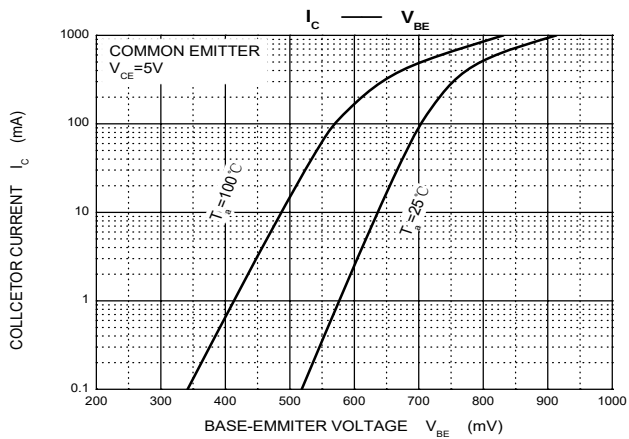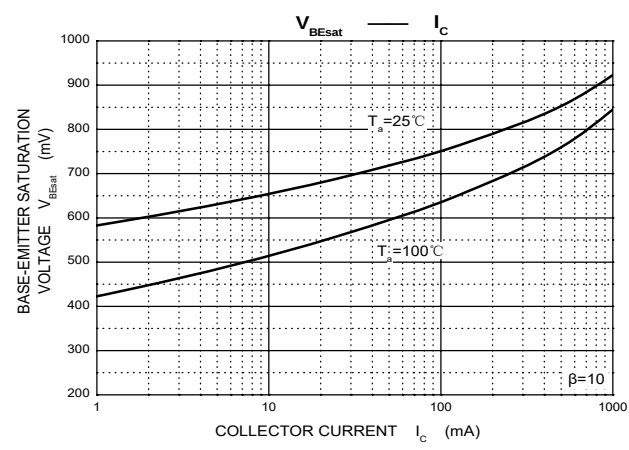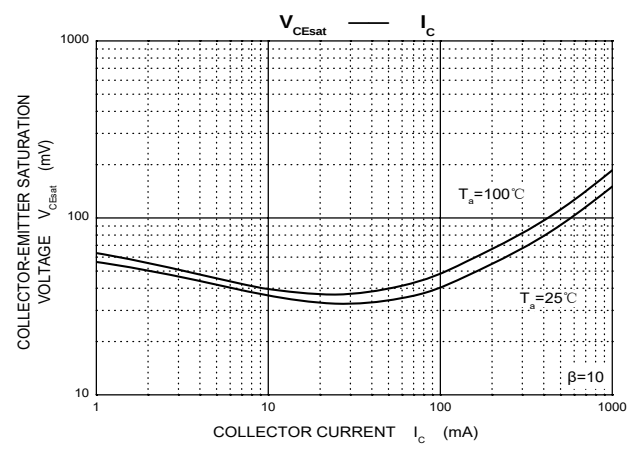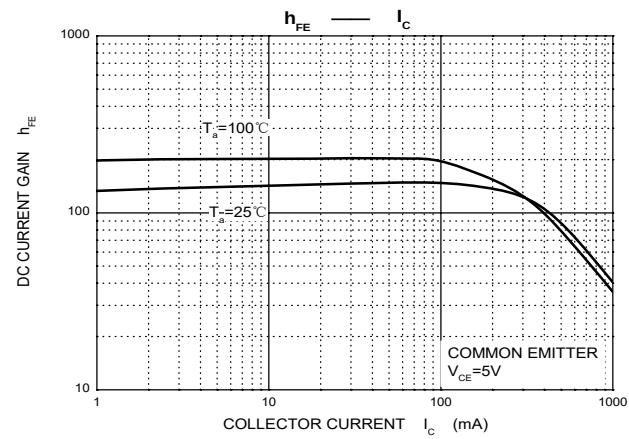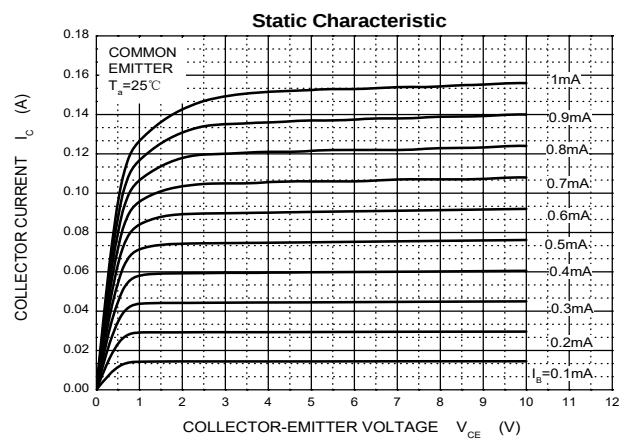

TO-220F Package Outline Dimensions

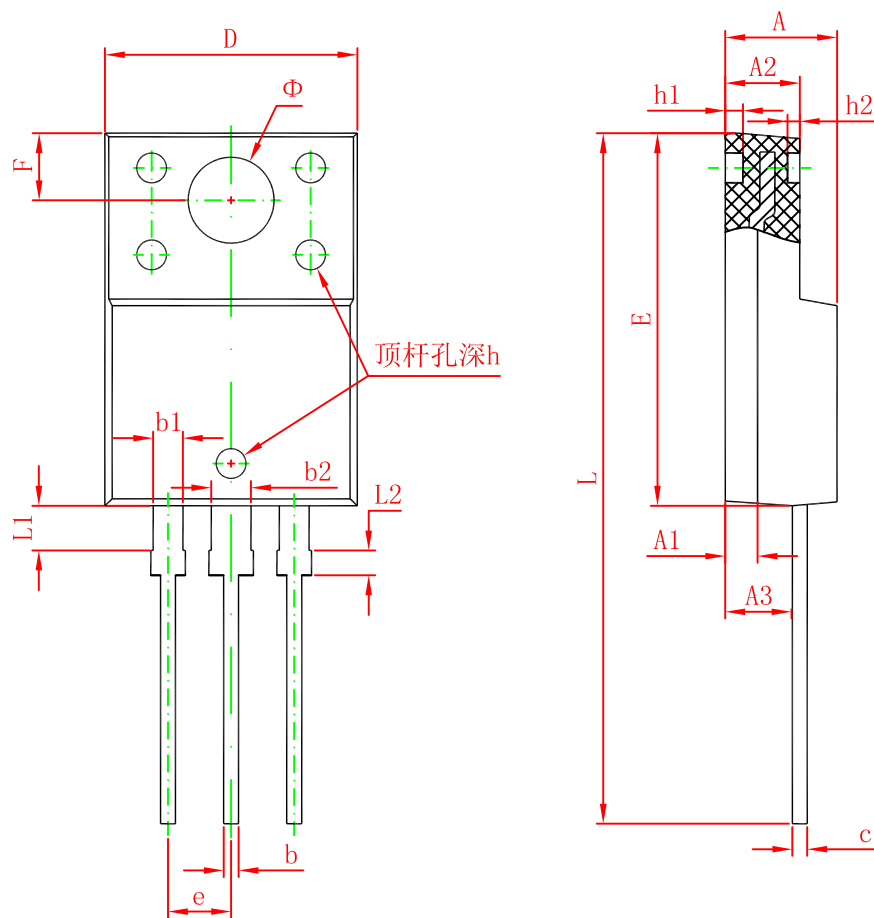

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	4.300	4.700	0.169	0.185
A1	1.300 REF.		0.051 REF.	
A2	2.800	3.200	0.110	0.126
A3	2.500	2.900	0.098	0.114
b	0.500	0.750	0.020	0.030
b1	1.100	1.350	0.043	0.053
b2	1.500	1.750	0.059	0.069
c	0.500	0.750	0.020	0.030
D	9.960	10.360	0.392	0.408
E	14.800	15.200	0.583	0.598
e	2.540 TYP.		0.100 TYP.	
F	2.700 REF.		0.106 REF.	
Φ	3.500 REF.		0.138 REF.	
h	0.000	0.300	0.000	0.012
h1	0.800 REF.		0.031 REF.	
h2	0.500 REF.		0.020 REF.	
L	28.000	28.400	1.102	1.118
L1	1.700	1.900	0.067	0.075
L2	0.900	1.100	0.035	0.043