



SK82B THRU SK810B

Reverse Voltage - 20 to 200 Volts Forward Current - 8.0 Ampere


SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:
250 °C/10 seconds at terminals

Mechanical Data

Case : JEDEC DO-214AC/SMA molded plastic body
Terminals : Solderable per MIL-STD-750, Method 2026
Polarity : Color band denotes cathode end Mounting
Position : Any
Weight : 0.002 ounce, 0.07 grams

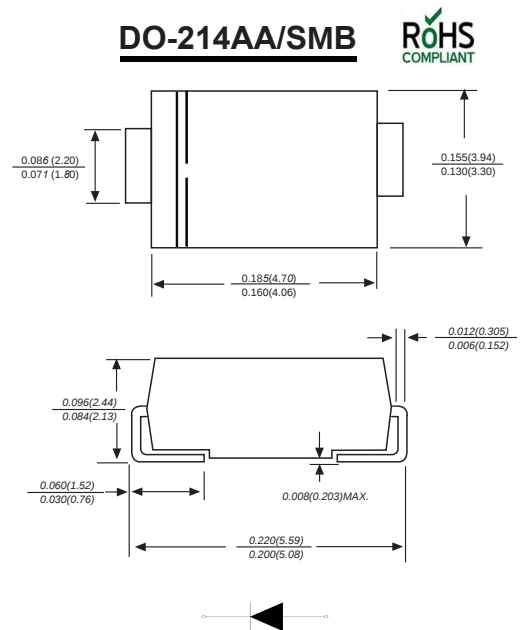

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	MDD SK82B	MDD SK83B	MDD SK835B	MDD SK84B	MDD SK845B	MDD SK86B	MDD SK88B	MDD SK810B	UNITS
Marking Code										
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	35	40	45	60	80	100	V
Maximum RMS voltage	V _{RMS}	14	21	24.5	28	31.5	42	56	70	V
Maximum DC blocking voltage	V _{DC}	20	30	35	40	45	60	80	100	V
Maximum average forward rectified current at TL(see fig.1)	I _(AV)	8.0								A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	200								A
Maximum instantaneous forward voltage at 8.0A	V _F	0.65						0.85		V
Maximum DC reverse current at rated DC blocking voltage	I _R	1.0								mA
TA=25℃ TA=100℃		20.0								
Typical junction capacitance (NOTE 1)	C _J	400								pF
Typical thermal resistance (NOTE 2)	RθJA	18.0								℃/W
Operating junction temperature range	T _J	-50 to +150								℃
Storage temperature range	T _{STG}	-50 to +150								℃

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas




SK82B THRU SK810B

Reverse Voltage - 20 to 200 Volts Forward Current - 8.0 Ampere


Typical Characteristics

Figure 1
Typical Forward Characteristics

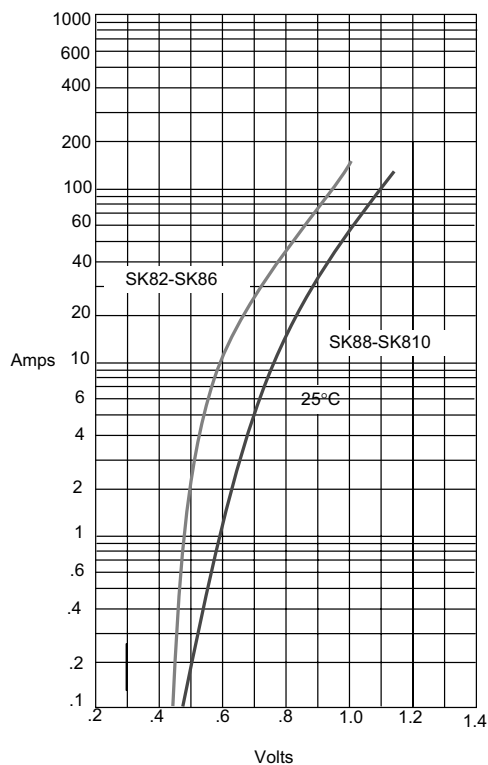


Instantaneous Forward Current - Amperes versus
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

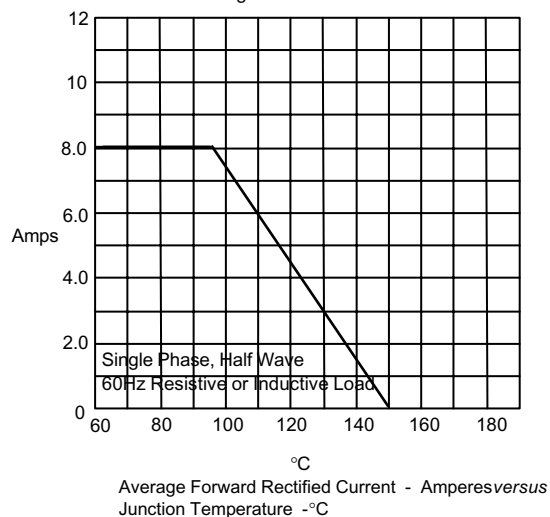

Average Forward Rectified Current - Amperes versus
Junction Temperature - °C

Figure 3
Junction Capacitance

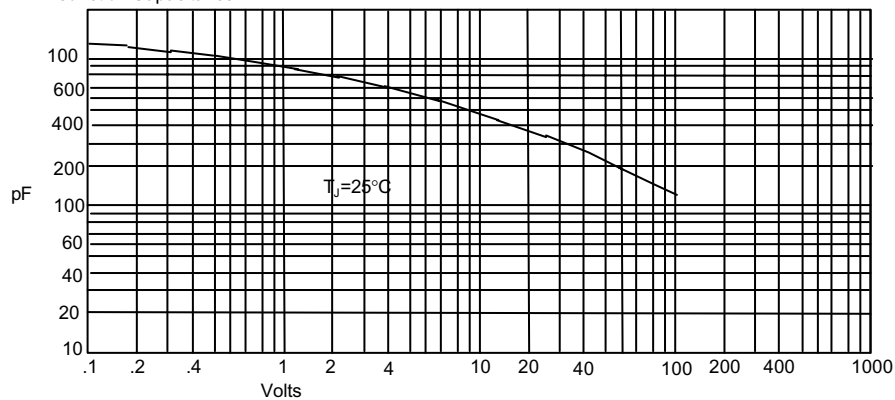

Junction Capacitance - pF versus
Reverse Voltage - Volts

The curve above is for reference only.




SK82B THRU SK810B

Reverse Voltage - 20 to 200 Volts Forward Current - 8.0 Ampere


Typical Characteristics

Figure 4
Typical Reverse Characteristics

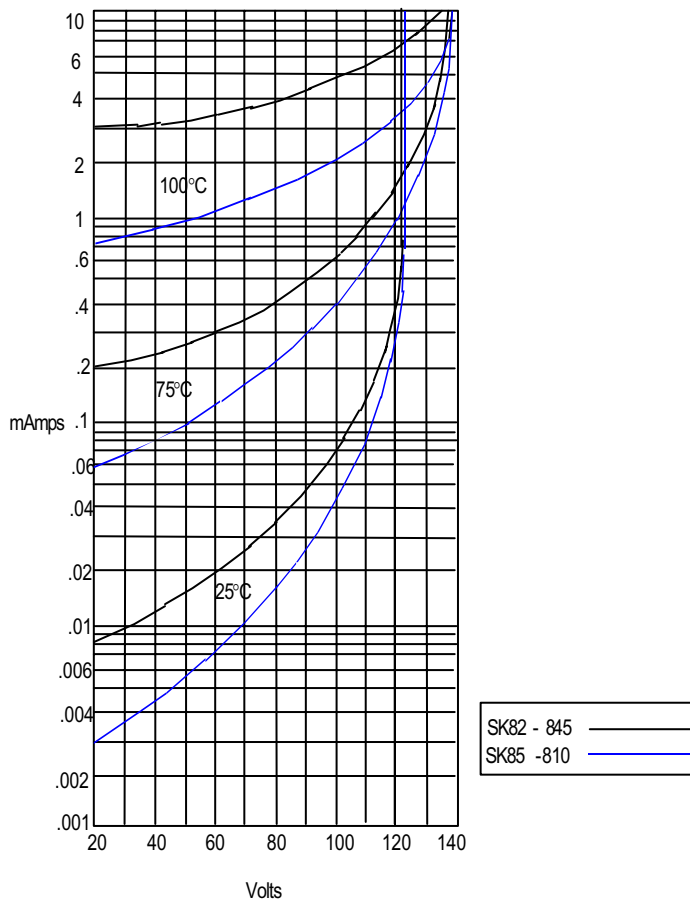

Instantaneous Reverse Leakage Current - MicroAmperes versus
Percent Of Rated Peak Reverse Voltage - Volts

Figure 5
Peak Forward Surge Current

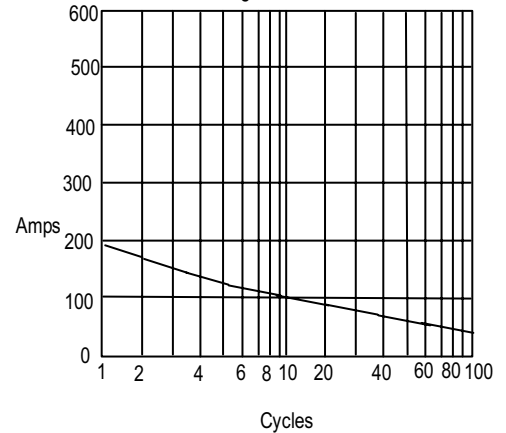

Peak Forward Surge Current - Amperes versus
Number Of Cycles At 60Hz - Cycles


The curve above is for reference only.



SK82B THRU SK810B

Reverse Voltage - 20 to 200 Volts Forward Current - 8.0 Ampere

Packing information

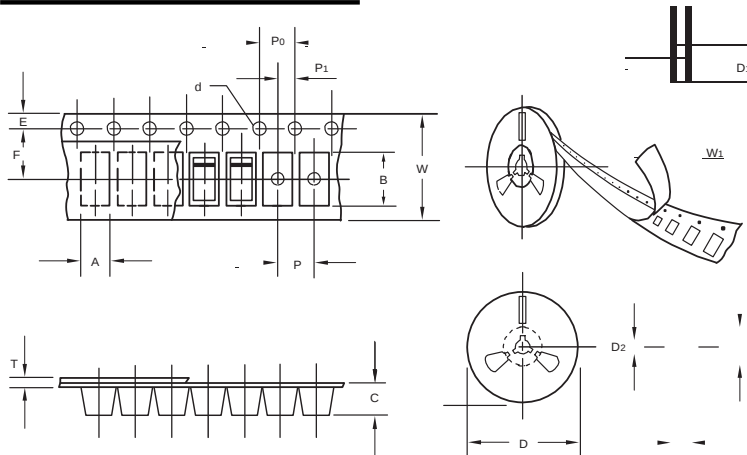

unit:mm


Item	Symbol	Tolerance	SMA
Carrier width	A	0.1	2.80
Carrier length	B	0.1	5.33
Carrier depth	C	0.1	2.36
Sprocket hole	d	0.05	1.50
13" Reel outside diameter	D	2.0	330.00
13" Reel inner diameter	D1	min	50.00
7" Reel outside diameter	D	2.0	178.00
7" Reel inner diameter	D1	min	62.00
Feed hole diameter	D2	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	5.50
Punch hole pitch	P	0.1	4.00
Sprocket hole pitch	P0	0.1	4.00
Embossment center	P1	0.1	2.00
Overall tape thickness	T	0.1	0.28
Tape width	W	0.3	12.00
Reel width	W1	1.0	18.00

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (mm)	BOX (pcs)	INNER BOX (mm)	REEL DIA, (mm)	CARTON SIZE (mm)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
SMB	13"	3,000	4.0	6,000	190*190*41	330	365*365*360	48,000	14.0

Suggested Pad Layout

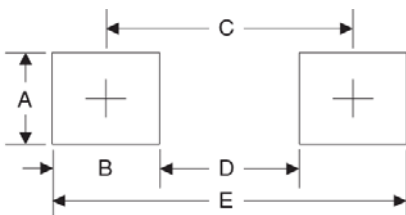

Symbol	Unit (mm)	Unit (inch)
A	1.68	0.066
B	1.52	0.060
C	3.90	0.154
D	2.41	0.095
E	5.45	0.215

Important Notice and Disclaimer

Microdiode Electronics (Jiangsu) reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Microdiode Electronics (Jiangsu) makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Microdiode Electronics (Jiangsu) assume any liability for application assistance or customer product design. Microdiode Electronics (Jiangsu) does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Microdiode Electronics (Jiangsu).

Microdiode Electronics (Jiangsu) products are not authorized for use as critical components in life support devices or systems without express written approval of Microdiode Electronics (Jiangsu).