



REV.	ECN NO OR DESCRIPTION	REVISED	DATE

NOTE:

1Material:

1.1 Terminal: Brass C2680.

1.2 Shell : Brass C2680

1.3 Housing : LCP+30%.G.F.(UL94-0),Black.

2.Plating:

2.1 Terminal: Au plated on contact area

Sn plated on solder tail area,
both over 30u" min. Ni underplated overall.

2.2 Shell : 70u"min. Ni overall.

3.Specifications:






3.1 Current Rating: 0.5A

3.2 Inital contact resistance excluding conductor resistance: 30mΩ

3.3 Dielectric withstanding voltage:500V AC PER minute

3.4 Insulation Resistance: 100MΩ MIN DC 500V

3.5 Operating temperature:-25°C ~ +85°C.

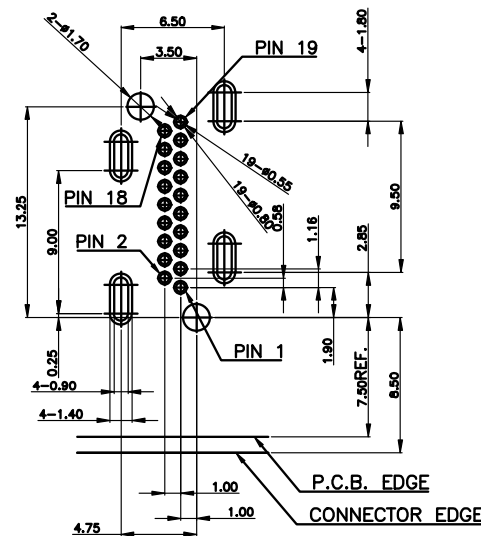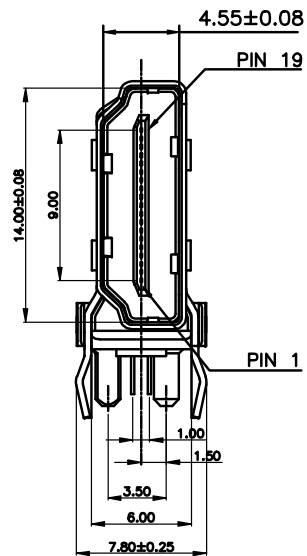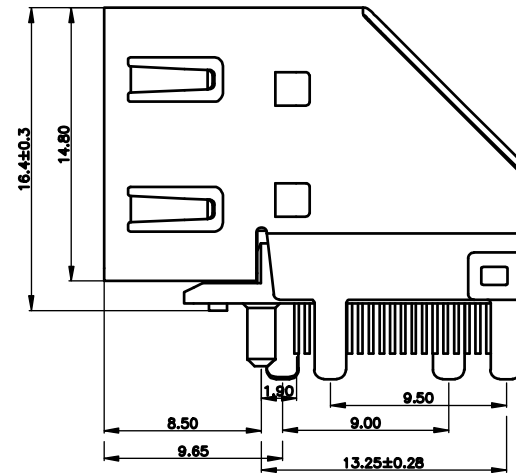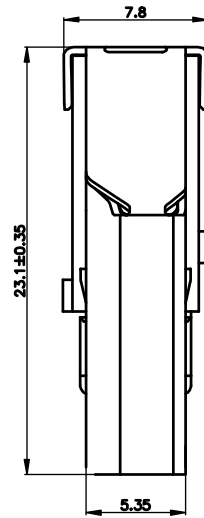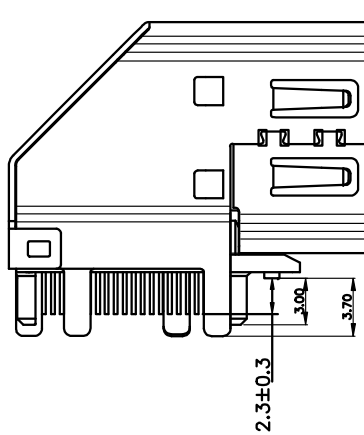

RECOMMENDED PCB LAYOUT (TOP VIEW)
TOLERANCE: ±0.05mm

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS: ANGLES:
X :±0.35 X :±2°
X.X :±0.25 X.X :±1°
X.XX :±0.15



东莞市汉博电子科技有限公司
DONGGUAN HANBO TECHNOLOGY CO., LTD

TITLE	HDMI A母正向侧立式DIP 脚长2.2			
DWN	xiong	PART NO. HDMI-213		
CHKD	lee	SCALE:1:1	UNIT: mm	
APVD	wang	SIZE: A4	SHEET:10F 1	

CUSTOMER COPY