



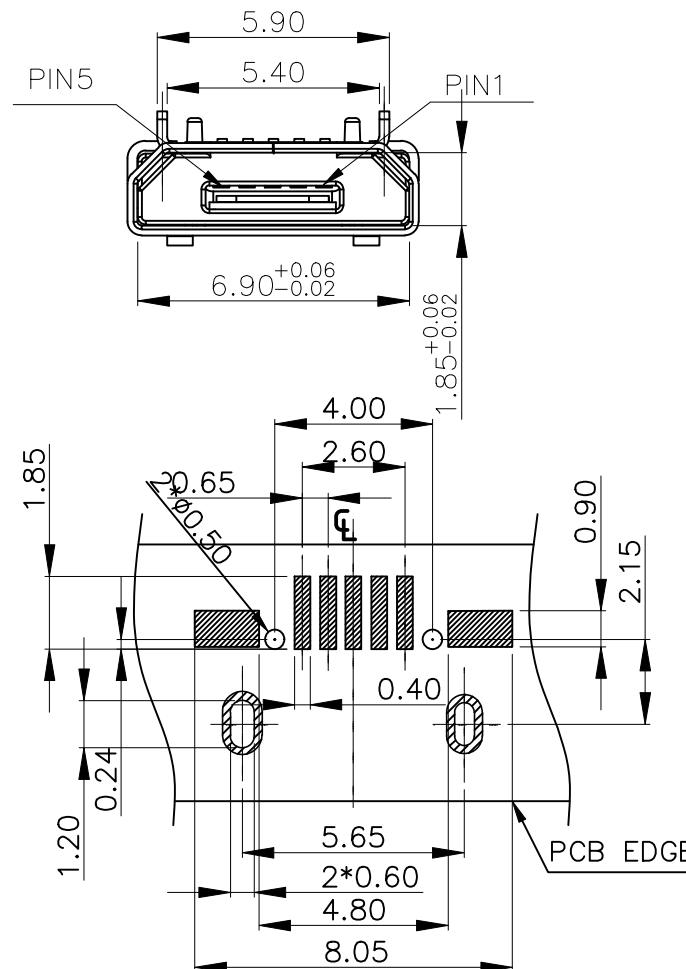

REV.	ECN NO OR DESCRIPTION	REVISED	DATE

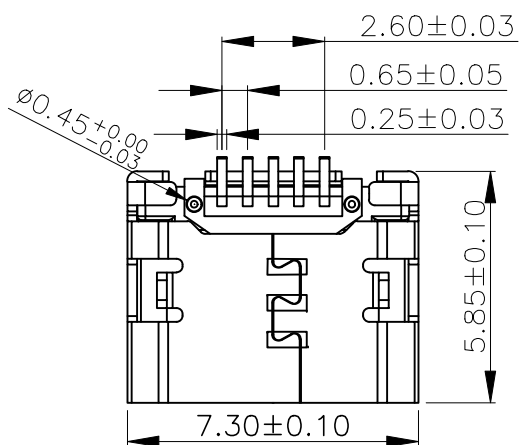

Specification:

1.Electrical Characteristics:

Current rating: 1,5PIN 1.8A Max/2,3,4PIN 1A Max.
Dielectric withstanding voltage: 100 V(ac) for 1 min.
Insulation Resistance: 100 MΩ Minimum.
Contact Resistance: 30 mΩ Maximum.

2.Environmental:


Operating Temperature:-30°C~+80°C.

3.Mechanical Characteristics:


Total mating force: 3.57 Kg Max.
Total unmating force: 1.0 Kg Min.

4.Material:

Insulator: HI-Temp Plastic UL 94V-O Rated.
Contact: Copper Alloy(t=0.15mm).
Shell: Copper Alloy/C2680(t=0.20mm).

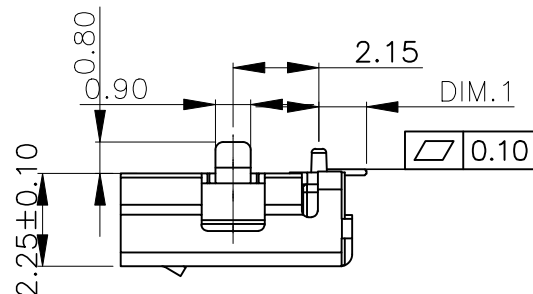

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

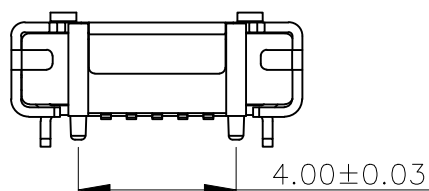

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS: ANGLES:
X :±0.20 X :±2°
X.X :±0.15 X.X :±1°
X.XX :±0.10



东莞市汉博电子科技有限公司
DONGGUAN HANBO TECHNOLOGY CO., LTD

TITLE	MICRO USB 5P 5.9前插后贴直边有柱			
DWN	xiong	PART NO. MC-605-AWT		
CHKD	lee	SCALE:1:1	UNIT: mm	
APVD	wang	SIZE: A4	SHEET:10F 1	

CUSTOMER COPY