
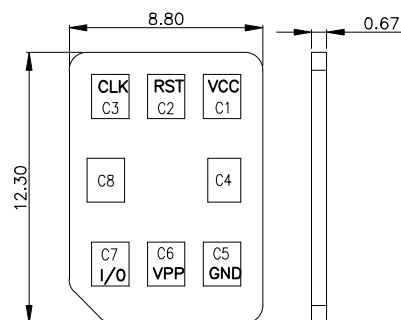




CRICUIT DIAGRAM FOR CARD DETECT SWITCH


CARD DETECT SWITCH (CD)

GND

NORMAL.....SHORT
INSERTING CARD.....OPEN



- 1) MATERIAL:
HOUSING:HI-TEMP. PLASIC UL 94V-0
CONTACT:COPPER ALLOY
SHELL:STANLESS STEEL
- 2). PLATING :
TERMINAL:
CONTACT AREA: Au GOLD FLASH.
SOLDER AREA: AU GOLD FLASH.
UNDER PLATE: NICKEL.
SHELL: NICKEL PLATED OVER ALL.
SOLDER AREA: GOLD FLASH.
3. SPECIALITY:
3.1 Rated current:1.0A
3.2 Rated voltage:30V
3.3 Contact Resistance:100mΩ MAX
3.4 Insulation Resistance:1000MΩ MIN 500V DC
3.5 Dielectric withstanding voltage: 500V AC.
3.6 Solder ability:260+0/-5℃, 30±10s.
3.7 Durability:5000 Cycles Min.
3.8 Operating condition:Temperature-40℃~+85℃;
Humidity 80% R.H MAX

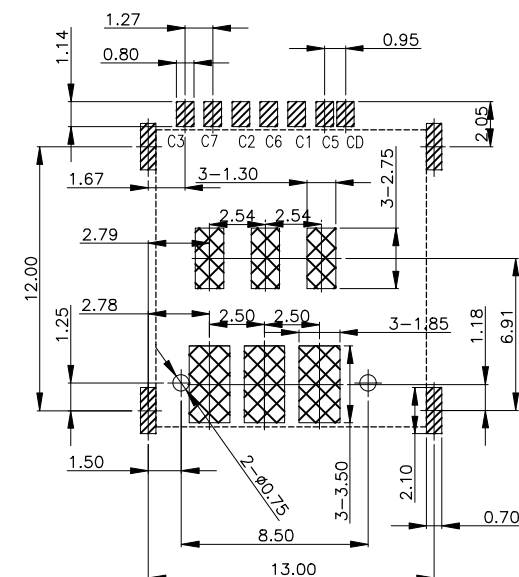

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

 PAD
 KEEP OUT AREA

UNLESS OTHERWISE SPECIFIED TOLERANCES		 东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD				
DECIMALS: ANGLES:		TITLE 6+1PIN 1.37H PUSH PUSH Nano SIM CARD CONN				
X :±0.30	X :±2°	DWN	xiong	PART NO. SNO-1351S		
X.X :±0.20	X.X :±1°	CHKD	lee	SCALE:1:1	UNIT: mm	
X.XX :±0.10		APVD	wang	SIZE: A4	SHEET:1OF 1	REV: A4
		CUSTOMER COPY				



REV.	ECN NO OR DESCRIPTION	REVISED	DATE


A

B

C


D

客户拉出方向

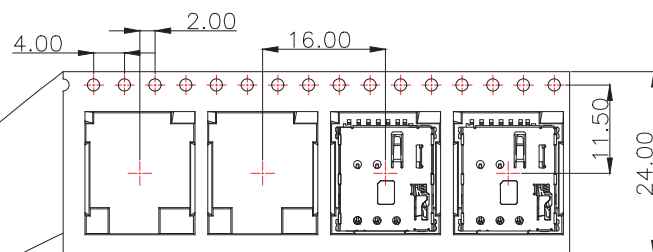


客户拉出方向

自粘上贴



PE袋

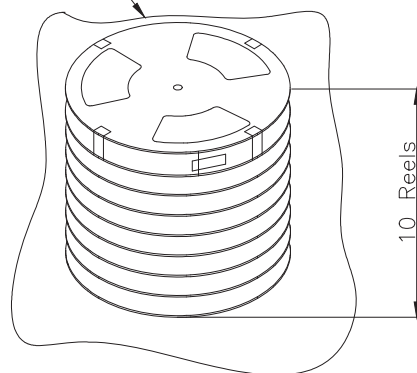

纸箱底部和顶部各垫一块珍珠棉

护角


纸箱

将10卷产品放入箱内

NOTES

1.每卷包装数量:1500PCS/每卷

2.卷带包装方式:

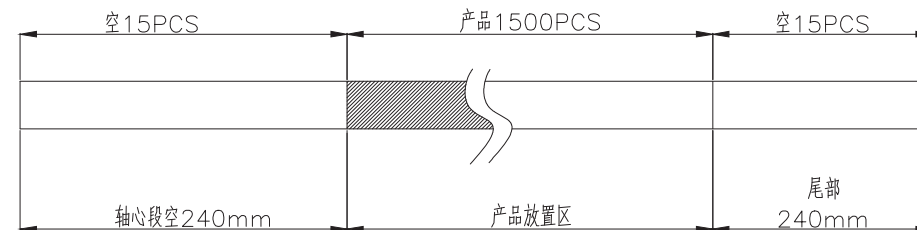

3.每箱包装数量:15000PCS/箱

4.纸箱350mm*350mm*340mm(内部尺寸),材质K=K

封箱胶带”工”字形封好

绿色环保标签



产品标签贴在纸箱左上角

UNLESS OTHERWISE SPECIFIED TOLERANCES		 东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD				
DECIMALS: ANGLES:		TITLE	6+1PIN 137H PUSH PUSH Nano SIM CARD CONN.			
X :±0.30	X :±2°	DWN	xiong	PART NO. SNO-1351S		
X.X :±0.20	X.X :±1°	CHKD	lee	SCALE:1:1	UNIT: mm	
X.XX :±0.10		APVD	wang	SIZE: A4	SHEET:10F 1	REV: A4
		CUSTOMER COPY				

1

2

3

4

5

6

A

B

C

D