

产品承认书

SPECIFICATION FOR APPROVAL

客户名称 -----
CUSTOMER NAME.

产品类型 Common Mode Line Filter
PRODUCT TYPE

客户料号 -----
CUSTOMER P/N

料号 FLCM-0905C-SERIES
OURS P/N

文件编号 SP-18121202
FILE NO.

客户承认/*CUSTOMER ACCEPTED*

承认 <i>APPROVED</i>	确认 <i>CHECKED</i>	承办 <i>DESIGN</i>


批注/*REMARK*

承认书/SPECIFICATION FOR APPROVAL

[illegible]


客户名称 CUSTOMER	-----	客户品名 CUSTOMER P/N	-----	版别 REV.	B
产品类型 PRODUCT TYPE	Common Mode Line Filter	品 名 OURS P/N	FLCM-0905C-SERIES	文件编号 FILE NO.	SP-18121202

一.外观图/DIMENSION（单位/UNIT：mm）

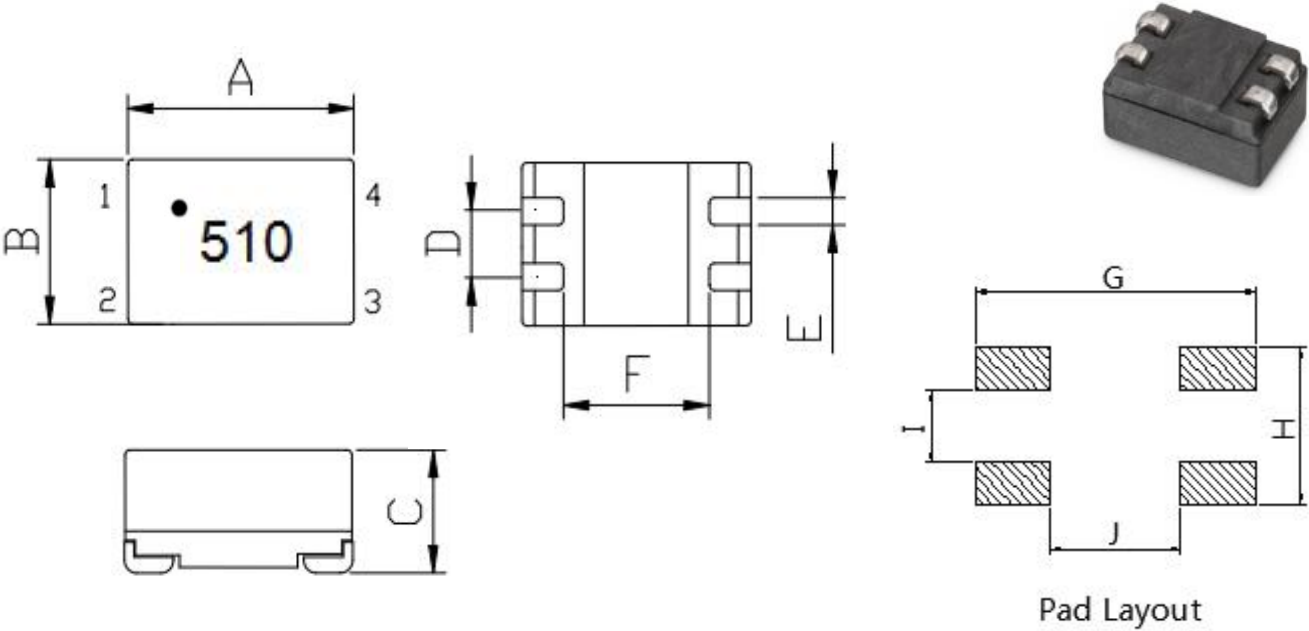

ITEM	A	B	C	D	E	F	G	H	I	J
DIM	9.2	6.0	5.0	2.54	1.00	5.70	9.5	3.74	1.34	5.5
TOLE	±0.3	±0.3	±0.3	±0.2	±0.1	Typ	Typ	Typ	Typ	Typ

二.电路图/CIRCUIT DIAGRAM



三.注意事项/NOTE：

- 1.印字：Gulim 6.5#,白色
- 2.平整度：0.1MM MAX

四.电气特性/ELECTRICAL CHARACTERISTIC

Part Number	Inductance L1=L2 (uH)		DC Resistance N1,N2(Ω)	Rated Current (A)Max.	Impedance (Ω) Min	Freq. range (MHz)	Rated Volt. (Vdc)Max.	IR (Ω) Min.
FLCM-0905C-100Y	10 +50%/-30%	1KHz/0.1V	0.08 Max.	1.6	300	20~200	50	10M
FLCM-0905C-250Y	25 +50%/-30%	1KHz/0.1V	0.16 Max.	1.0	600	5~100	50	10M
FLCM-0905C-400Y	40 +50%/-30%	1KHz/0.1V	0.25 Max.	0.9	800	5~100	50	10M
FLCM-0905C-510Y	51 +50%/-30%	1KHz/0.1V	0.32 Max.	0.8	1000	5~50	50	10M
FLCM-0905C-251Y	250 ±50%	100KHz/5mV	0.13 Max.	1.2	600	5~50	50	10M
FLCM-0905C-471Y	470 ±50%	100KHz/5mV	0.14 Max.	1.1	800	1~50	50	10M
FLCM-0905C-501Y	500 ±50%	100KHz/5mV	0.15 Max.	1.0	900	1~40	50	10M
FLCM-0905C-102Y	1000 ±50%	100KHz/5mV	0.31 Max.	0.8	1000	1~30	50	10M
FLCM-0905C-202Y	2000 ±50%	100KHz/5mV	0.42 Max.	0.6	3000	1~10	50	10M

客户名称 CUSTOMER	-----	客户品名 CUSTOMER P/N	-----	版别 REV.	B
产品类型 PRODUCT TYPE	Common Mode Line Filter	品 名 OURS P/N	FLCM-0905C-SERIES	文件编号 FILE NO.	SP-18121202


Part Number	Inductance L1=L2 (uH)		DC Resistance N1,N2(Ω)	Rated Current (A)Max.	Impedance (Ω) Min	Freq. range (MHz)	Rated Volt. (Vdc)Max.	IR (Ω) Min.
FLCM-0905C-	4700 ±50%	100KHz/5mV	0.90 Max.	0.4	3000	0.5~5	50	10M
472YCLCM-0905C-	6500 ±50%	100KHz/5mV	1.05 Max.	0.3	4000	0.3~2	50	10M

- 652Y
- (1).Rated Current: Temp.rise 40℃ Typ
 (2).Operating Temperature: -20℃ up to +80℃
 (3).Storage Temperature: -20℃ up to +40℃, 75% RH max.


五.材料清单/MATERIAL LIST

NO.	ITEM	DESCRIPTION
1	CORE	FERRITE
2	CASE	LCP SC-0186
3	WIRE	P180 Grd1
4	ADHESIVE	XNR-3614
5	TIN	107H
6	INK	WHITE





六.特征曲线/CHARACTERISTICS(REFERENCE)

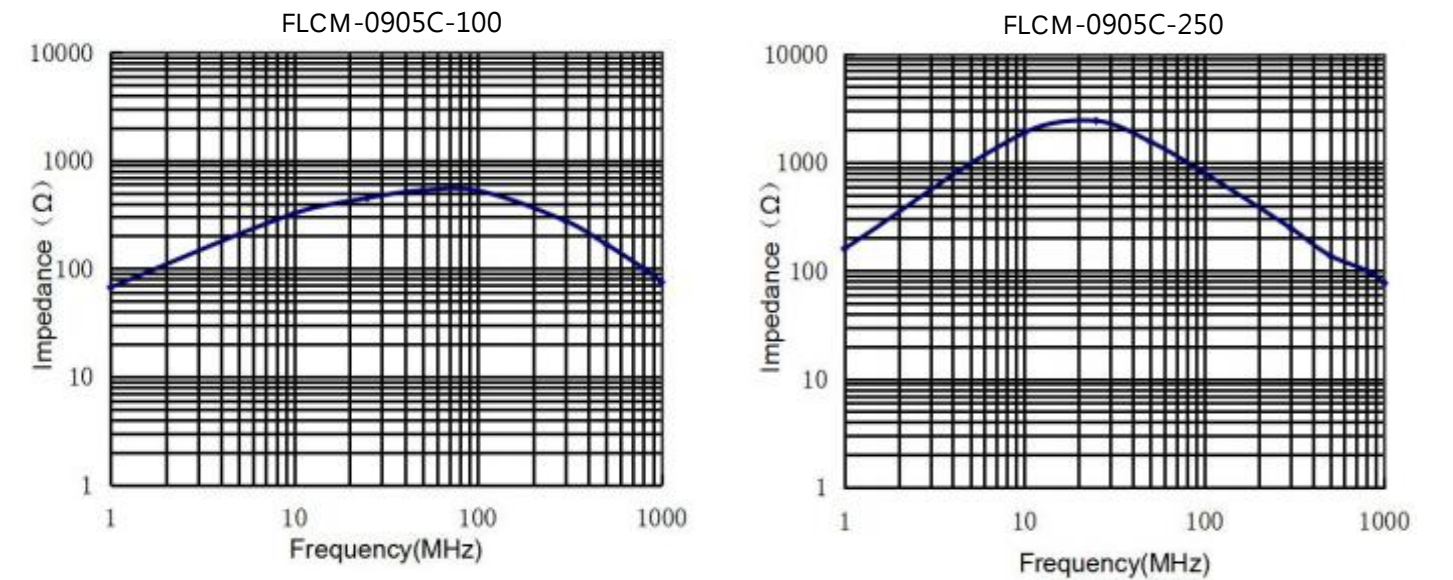

客户名称 CUSTOMER	-----	客户品名 CUSTOMER P/N	-----	版别 REV.	B
产品类型 PRODUCT TYPE	Common Mode Line Filter	品 名 OURS P/N	FLCM-0905C-SERIES	文件编号 FILE NO.	SP-18121202

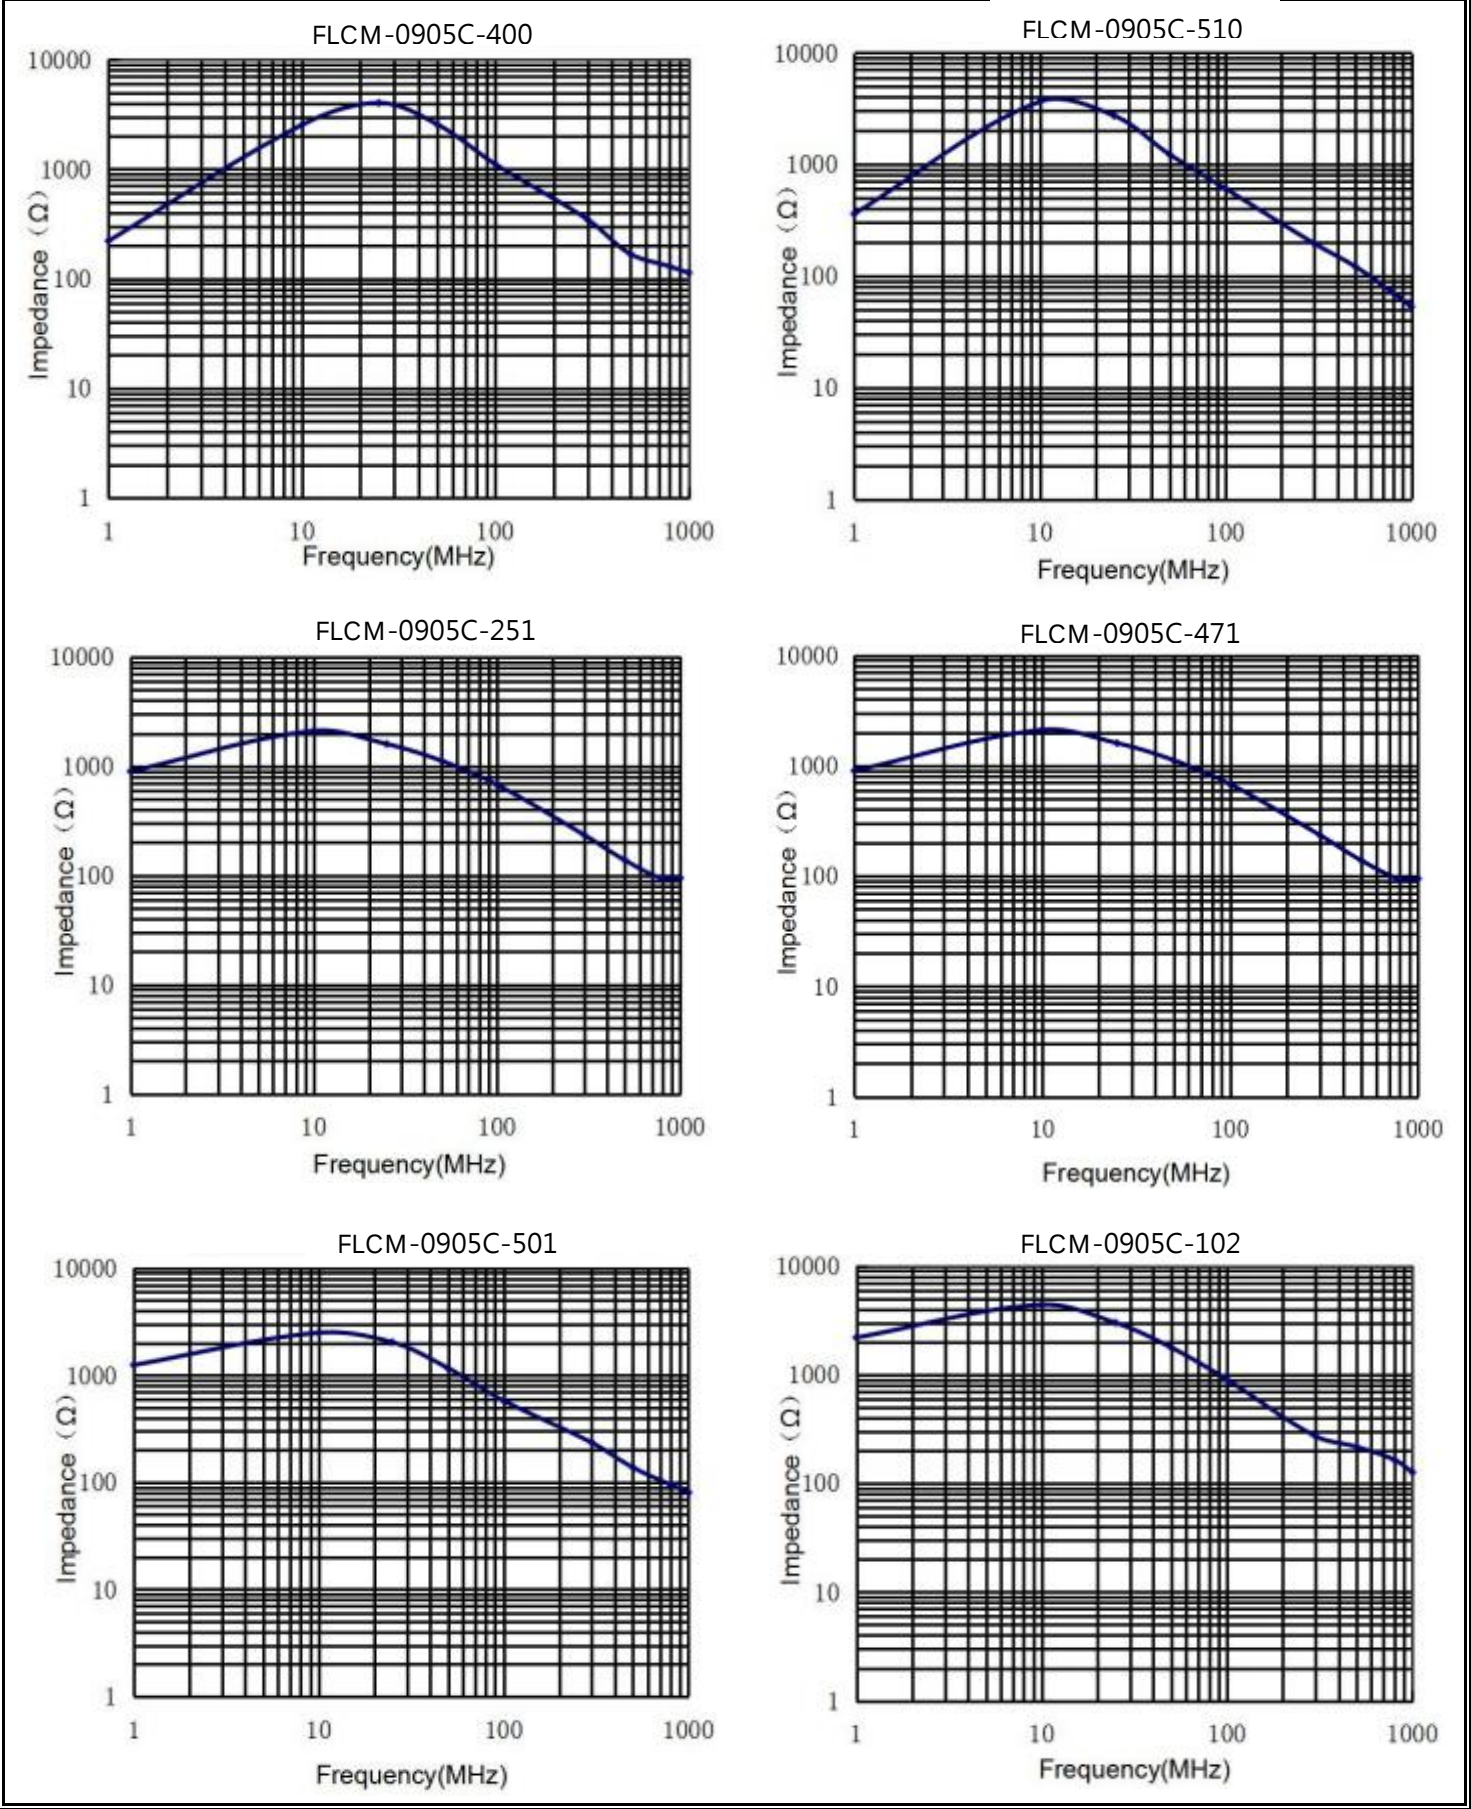


客户名称 CUSTOMER	-----	客户品名 CUSTOMER P/N	-----	版别 REV.	B
产品类型 PRODUCT TYPE	Common Mode Line Filter	品 名 OURS P/N	FLCM-0905C-SERIES	文件编号 FILE NO.	SP-18121202

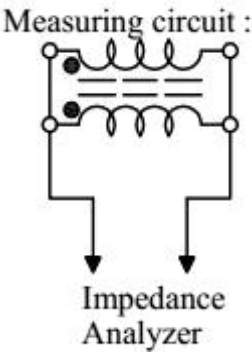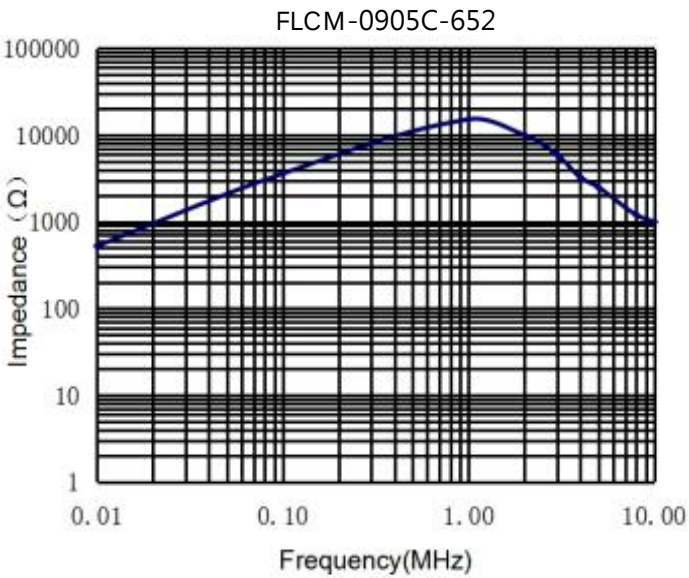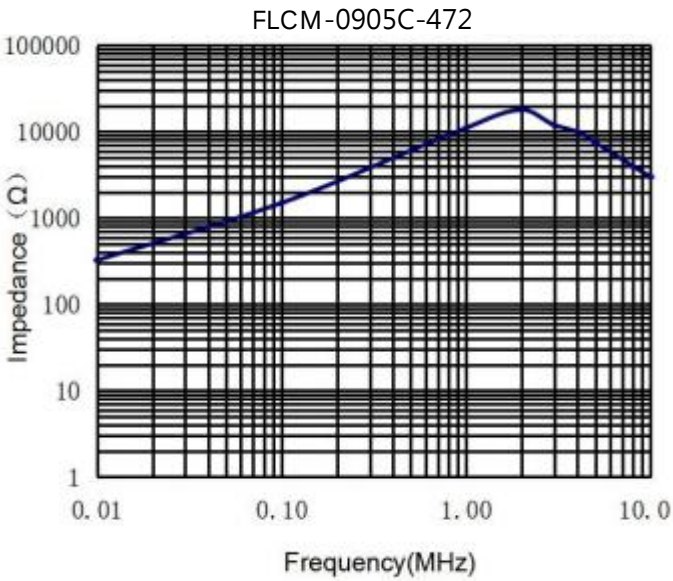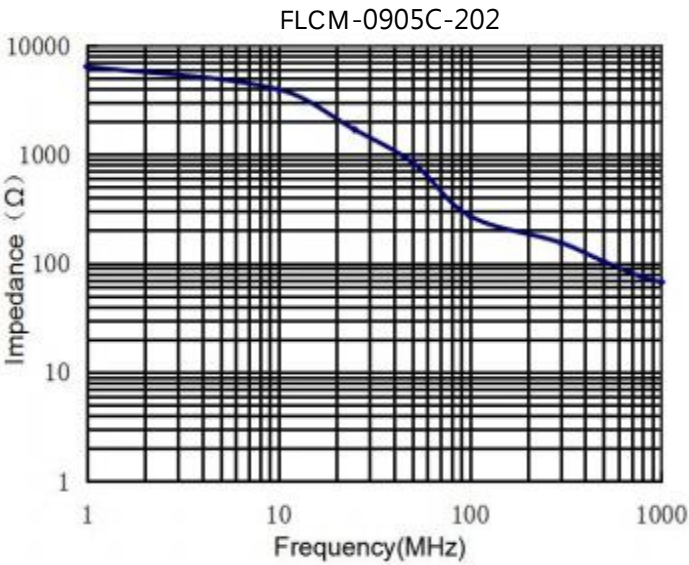


客户名称 CUSTOMER	-----	客户品名 CUSTOMER P/N	-----	版别 REV.	B
产品类型 PRODUCT TYPE	Common Mode Line Filter	品 名 OURS P/N	FLCM-0905C-SERIES	文件编号 FILE NO.	SP-18121202

七.可靠性测试/RELIABILITY TESTING

Operating Temperature	- 20 to +80 °C (Contain Heating coil)
Appearance Inspection	No external defects by visual inspection
Terminal Strength 	After soldering , between copper plaet and terminals of coils , push in two directions of X , Y with standing 10N(1.02kg) for10+/-2 sec. Terminal should not peel off. (Refer to figure at right)
Heat endurance of reflow soldering	Refer to figure
Insulating resistance	Over 100 MΩ at 100V D.C . between wire and core
Dielectric Strength	Apply at 0.5KV 3mA for 1 minute between wire and core
Temperature characteristics	Inductance coefficient (0~2,000) × 10 / °C (- 20~ + 80 °C)
Humidity characteristics	Inductance deviation within ± 10% , after 96 hours in 90~95% relative humidity at 40 ± 2 °C and 1 hours drying under normal condition

A test is made under the above mentioned condition , and it is kept for 2 hours in the normal



IR Reflow profile

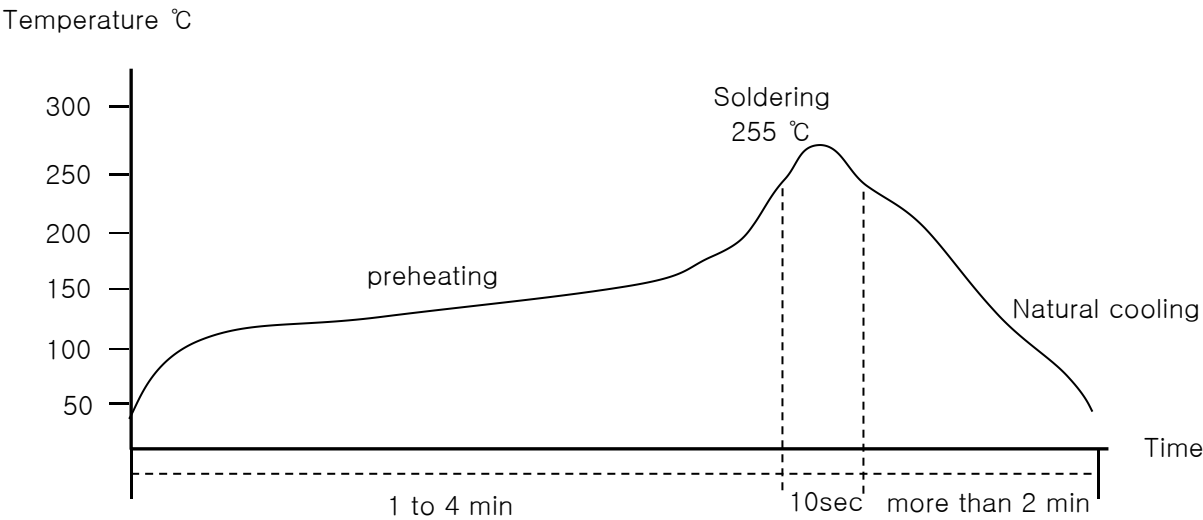


Temperature and humidity . After that , no mechanical and electrical defect should be found .

客户名称 CUSTOMER	-----	客户品名 CUSTOMER P/N	-----	版别 REV.	B
产品类型 PRODUCT TYPE	Common Mode Line Filter	品 名 OURS P/N	FLCM-0905C-SERIES	文件编号 FILE NO.	SP-18121202

八.包装规格/PACKING SPECIFICATIONS（单位/UNIT：mm）

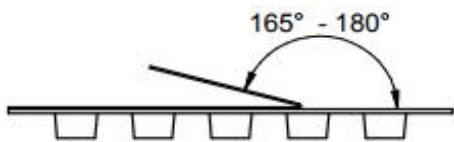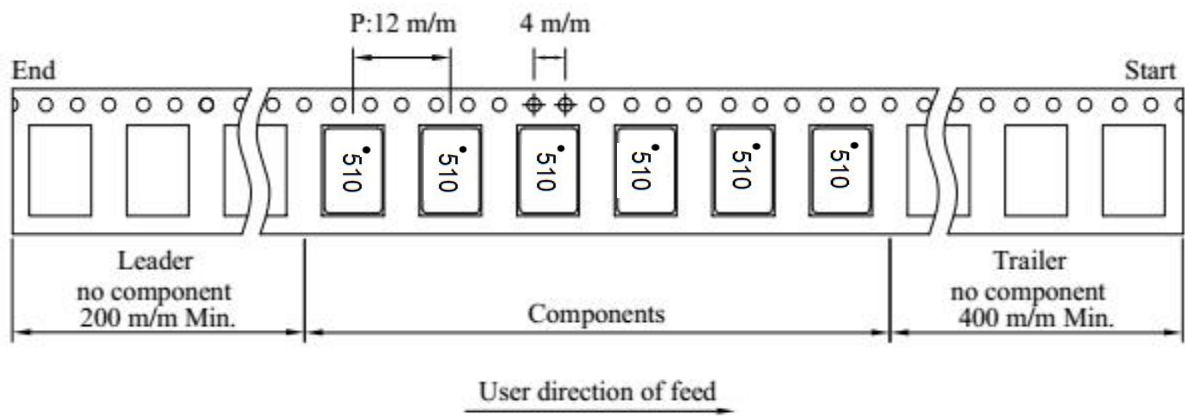

Tape width	Distance	Pull-of force
16 mm	12 mm	10~120g

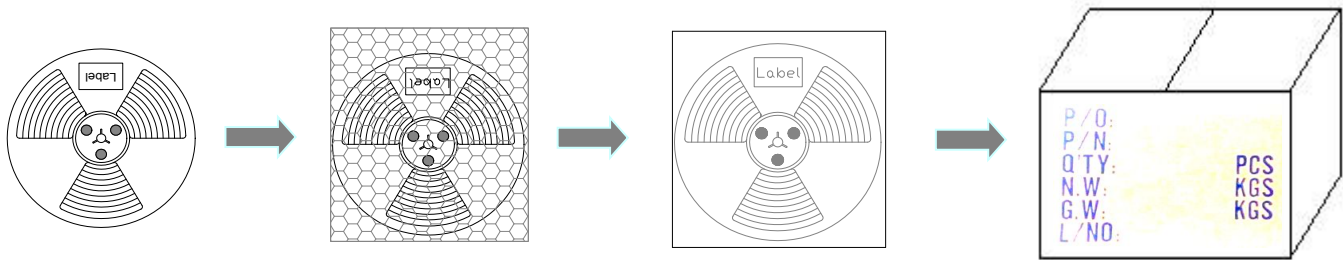

轮盘：13'(直径330mm)
数量：1000PCS/盘

PE袋
数量：3000PCS/袋

内盒
数量：3000PCS/盒

外箱，数量：15000PCS/箱
不足整箱用内盒或填充物装满