



DESCRIPTION ·With TO-264 package ·Complement to type MJL21194 ·Excellent gain linearity	TO-264    1. Base (B) 2. Collector (C) 3. Emitter (E)
---	--

ABSOLUTE MAXIMUM RATINGS(T_C=25℃)

SYMBOL	PARAMETER	CONDITIONS	MAX	UNIT
V _{CBO}	Collector-base voltage	Open emitter	-400	V
V _{CEO}	Collector-emitter voltage	Open base	-250	V
V _{EBO}	Emitter-base voltage	Open collector	-5	V
I _C	Collector current		-16	A
I _{CM}	Collector current-peak		-30	A
I _B	Base current		-5	A
P _D	Total power dissipation	T _C =25℃	200	W
T _j	Junction temperature		-65~150	℃
T _{stg}	Storage temperature		-65~150	℃

THERMAL CHARACTERISTICS


SYMBOL	PARAMETER	VALUE	UNIT
R _{th j-C}	Thermal resistance from junction to case	0.7	℃/W

CHARACTERISTICS
T_j=25℃ unless otherwise specified


SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-emitter breakdown voltage	I _C =-100mA ; I _B =0	-250			V
V _{CE(sat)-1}	Collector-emitter saturation voltage	I _C =-8A ; I _B =-0.8A			-1.4	V
V _{CE(sat)-2}	Collector-emitter saturation voltage	I _C =-16A ; I _B =-3.2A			-4.0	V
V _{BE(ON)}	Base-emitter on voltage	I _C =-8A ; V _{CE} =-5V			-2.2	V
I _{CEX}	Collector cut-off current	V _{CE} =-250V ; V _{BE(off)} =-1.5V			-100	μA
I _{CEO}	Collector cut-off current	V _{CE} =-200V ; I _B =0			-100	μA
I _{EBO}	Emitter cut-off current	V _{EB} =-5V ; I _C =0			-100	μA
h _{FE-1}	DC current gain	I _C =-8A ; V _{CE} =-5V	25		75	
h _{FE-2}	DC current gain	I _C =-16A ; V _{CE} =-5V	8			
f _T	Transition frequency	I _C =-1A ; V _{CE} =-10V, f=1MHz	4			MHz
C _{OB}	Collector output capacitance	f=1MHz ; V _{CB} =-10V, I _E =0			500	pF

Typical Characteristics (Continued)


$h_{FE} - I_C$ (MJL21193)

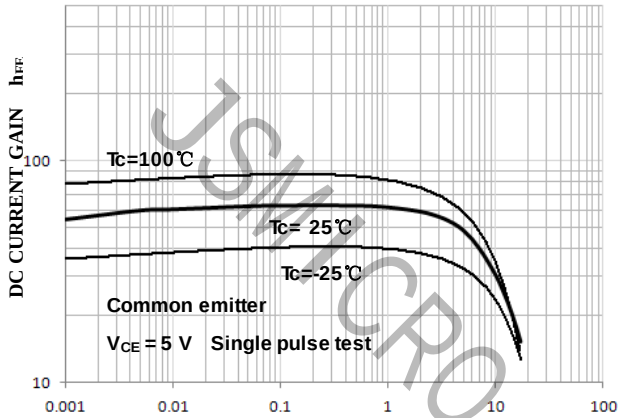

$V_{CE(sat)} - I_C$ (MJL21193)

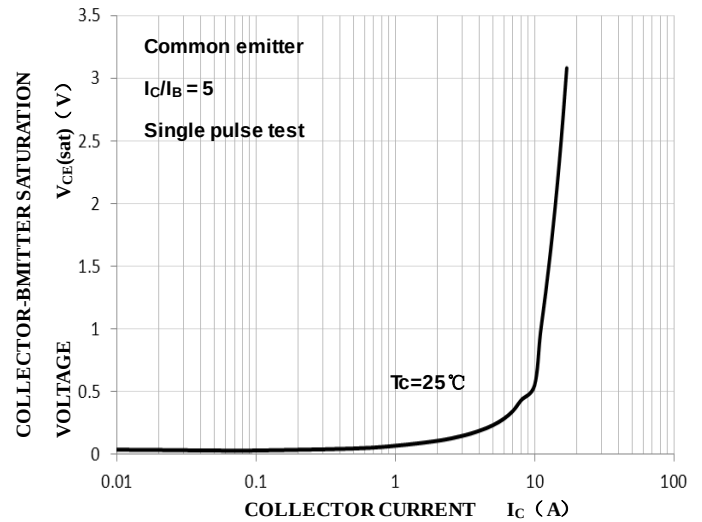

SOA

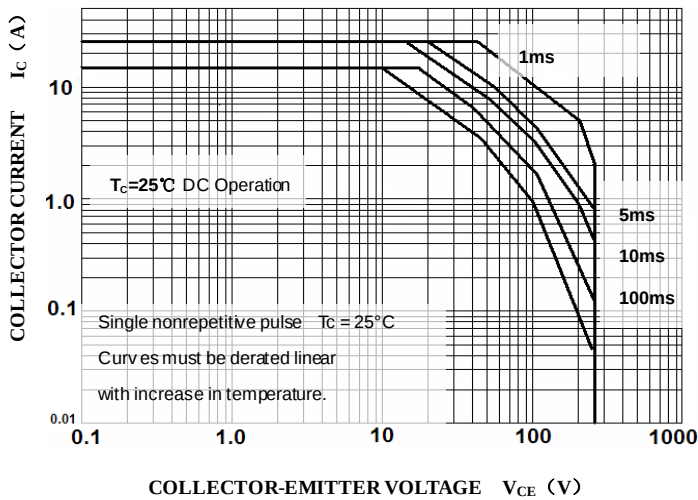

$P_D - T_C$

