


FEATURES

- Epitaxial planar die construction.
- Complementary NPN type available MMBT2222A.
- Ideal for medium power amplification and switching.
- MSL 1

APPLICATIONS

- This device is designed as a general purpose amplifier and switching.
- The useful dynamic range extends to 600mA as a switch and to 100MHz as a amplifier.

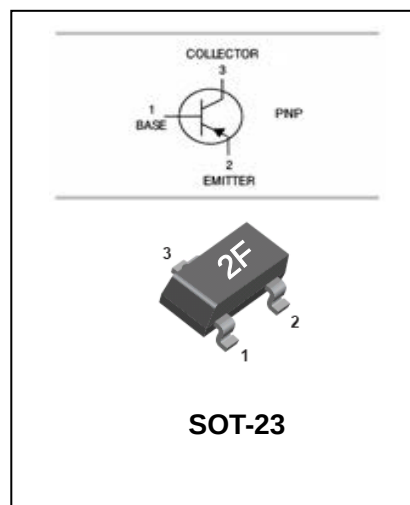

MAXIMUM RATING @ Ta=25°C unless otherwise specified





Symbol	Parameter	Value	Unit
V _{CBO}	Collector-Base Voltage	-60	V
V _{CEO}	Collector-Emitter Voltage	-60	V
V _{EBO}	Emitter-Base Voltage	-5	V
I _C	Collector Current -Continuous	-600	mA
P _D	Total Device Dissipation	300	mW
R _{θJA}	Thermal Resistance Junction to Ambient	417	°C/W
R _{θJC}	Thermal Resistance Junction to Case	250	°C/W
T _J , T _{STG}	Junction and Storage Temperature	-55 to +150	°C/W

ESD RATING

Characteristic	Symbol	Value	Unit	JEDEC Class
Electrostatic Discharge - Human Body Model	ESD HBM	4,000	V	3A
Electrostatic Discharge - Machine Model	ESD MM	400	V	C

ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = -10\mu A$ $I_E = 0$	-60		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = -10mA$ $I_B = 0$	-60		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = -10\mu A$ $I_C = 0$	-5		V
Collector cut-off current	I_{CBO}	$V_{CB} = -50V$ $I_E = 0$ $V_{CB} = -50V$ $I_E = 0$ $T_A = 125^\circ C$		-10 -10	nA μA
Collector cut-off current	I_{CEX}	$V_{CE} = -30V$, $V_{BE(OFF)} = -0.5V$		-50	nA
Base cut-off current	I_{BL}	$V_{CE} = -30V$, $V_{BE(OFF)} = -0.5V$		-50	nA
DC current gain	h_{FE}	$V_{CE} = -10V$ $I_C = -100\mu A$ $V_{CE} = -10V$ $I_C = -1mA$ $V_{CE} = -10V$ $I_C = -10mA$ $V_{CE} = -10V$ $I_C = -150mA$ $V_{CE} = -10V$ $I_C = -500mA$	75 100 100 100 50	- - - 300 -	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -150mA$ $I_B = -15mA$ $I_C = -500mA$ $I_B = -50mA$		-0.4 -1.6	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = -150mA$ $I_B = -15mA$ $I_C = -500mA$ $I_B = -50mA$		-1.3 -2.6	V
Transition frequency	f_T	$V_{CE} = -20V$ $I_C = -50mA$ $f = 100MHz$	200		MHz
Output Capacitance	C_{obo}	$V_{CB} = -10V$ $f = 100kHz$ $I_E = 0$	-	8.0	pF
Input Capacitance	C_{ibo}	$V_{EB} = -2V$ $f = 100kHz$ $I_C = 0$	-	30	pF
Delay time	t_d	$V_{CE} = -30V$, $I_C = -150mA$, $I_{B1} = -15mA$		10	ns
Rise time	t_r			40	ns
Storage time	t_s	$V_{CE} = -6V$, $I_C = -150mA$		225	ns
Fall time	t_f	$I_{B1} = -I_{B2} = -15mA$		60	ns

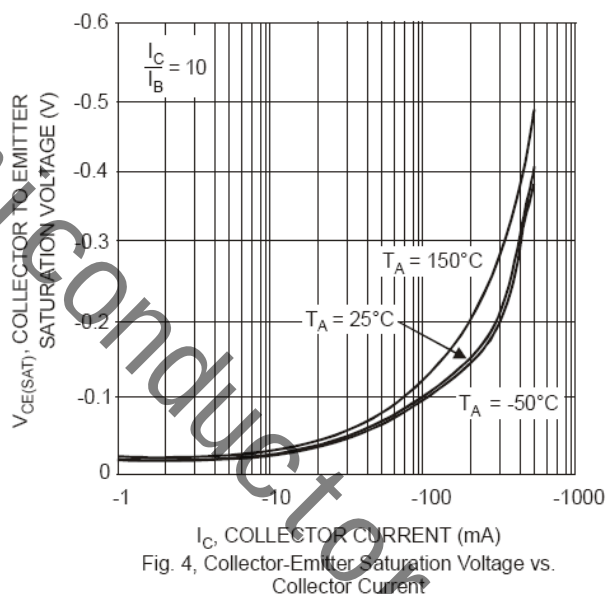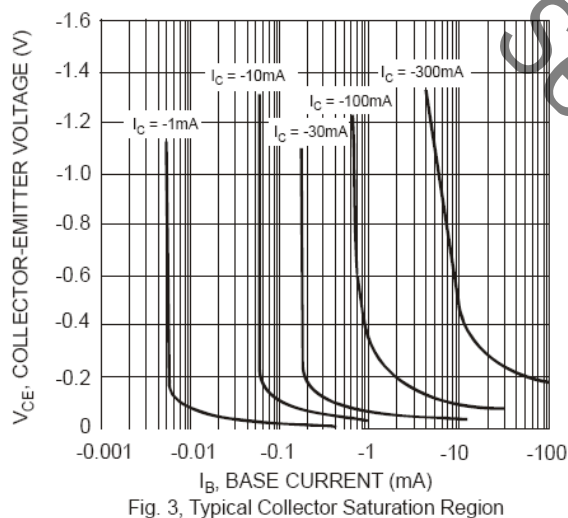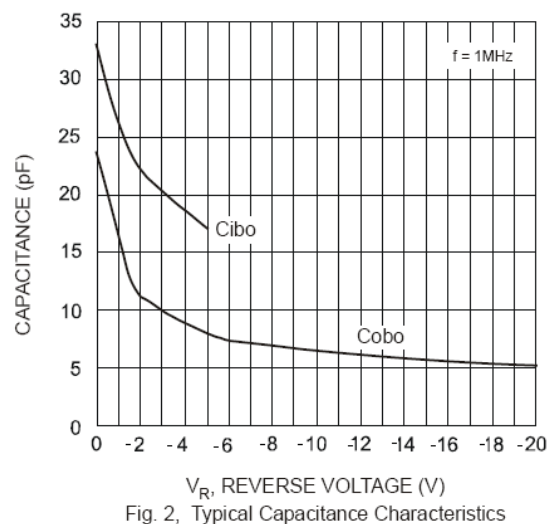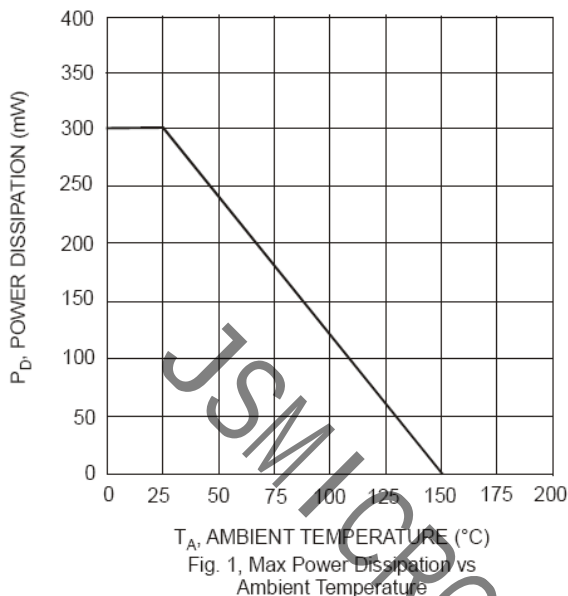TYPICAL CHARACTERISTICS @ $T_A=25^\circ\text{C}$ unless otherwise specified


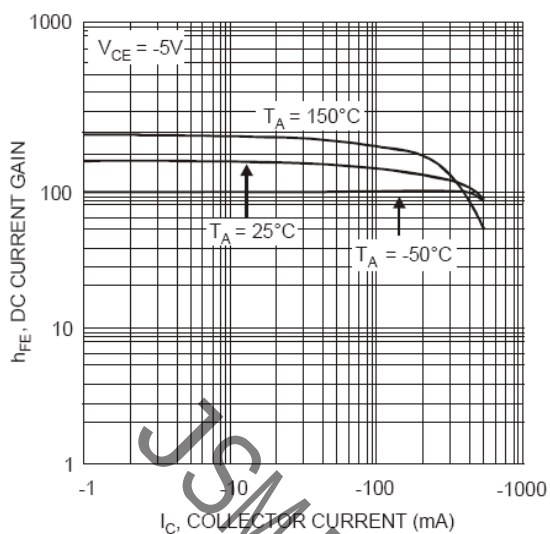


Fig. 5. DC Current Gain vs. Collector Current

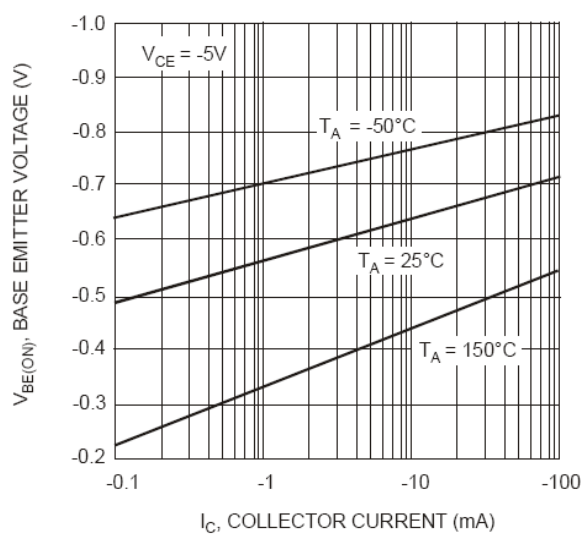


Fig. 6. Base-Emitter Voltage vs. Collector Current


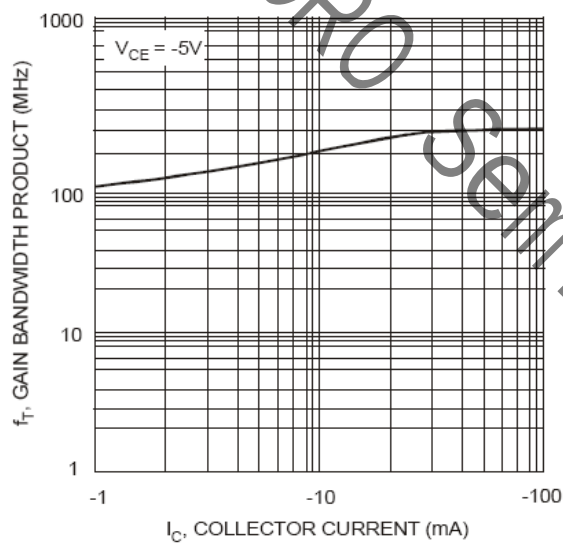


Fig. 7. Gain Bandwidth Product vs. Collector Current


PACKAGE OUTLINE

Plastic surface mounted package

SOT-23

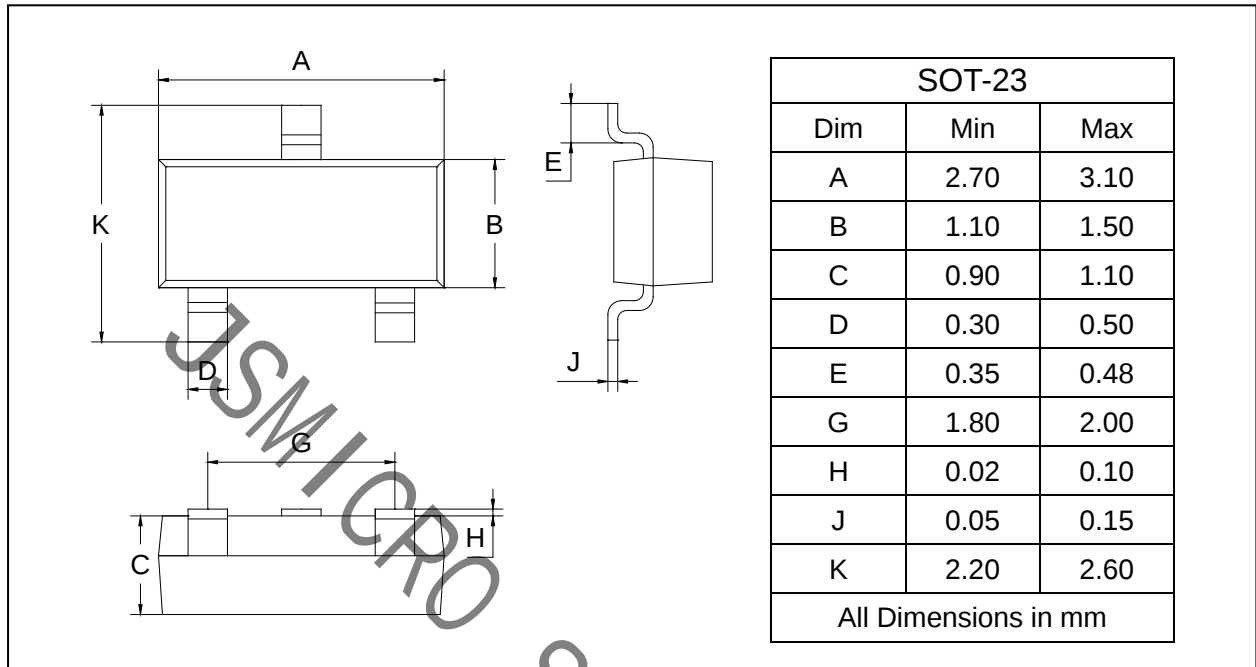

SOLDERING FOOTPRINT

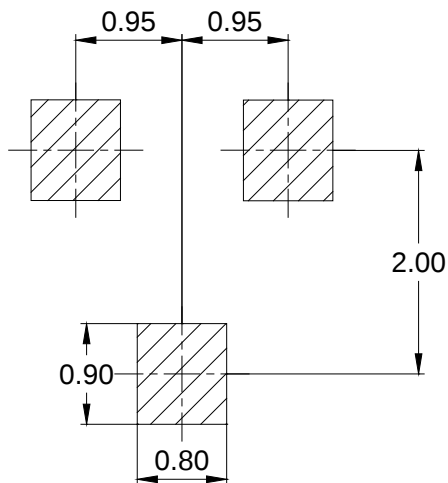

PACKAGE INFORMATION

Device	Package	Shipping
MMBT2907A	SOT-23	3000 pcs / Tape & Reel